MY24 & BEYOND
SILVERADO MED DUTY
CONFIGURATION
DIAGRAMS C/K(56403)

CONFIGURATION DIAGRAMS - GENERAL INFORMATION

Model:	C56403 K56403
Cab:	REGULAR CAB

CA	WB
84”	165”
108”	189”
120”	201”
138”	219”
150”	231”
162”	243”

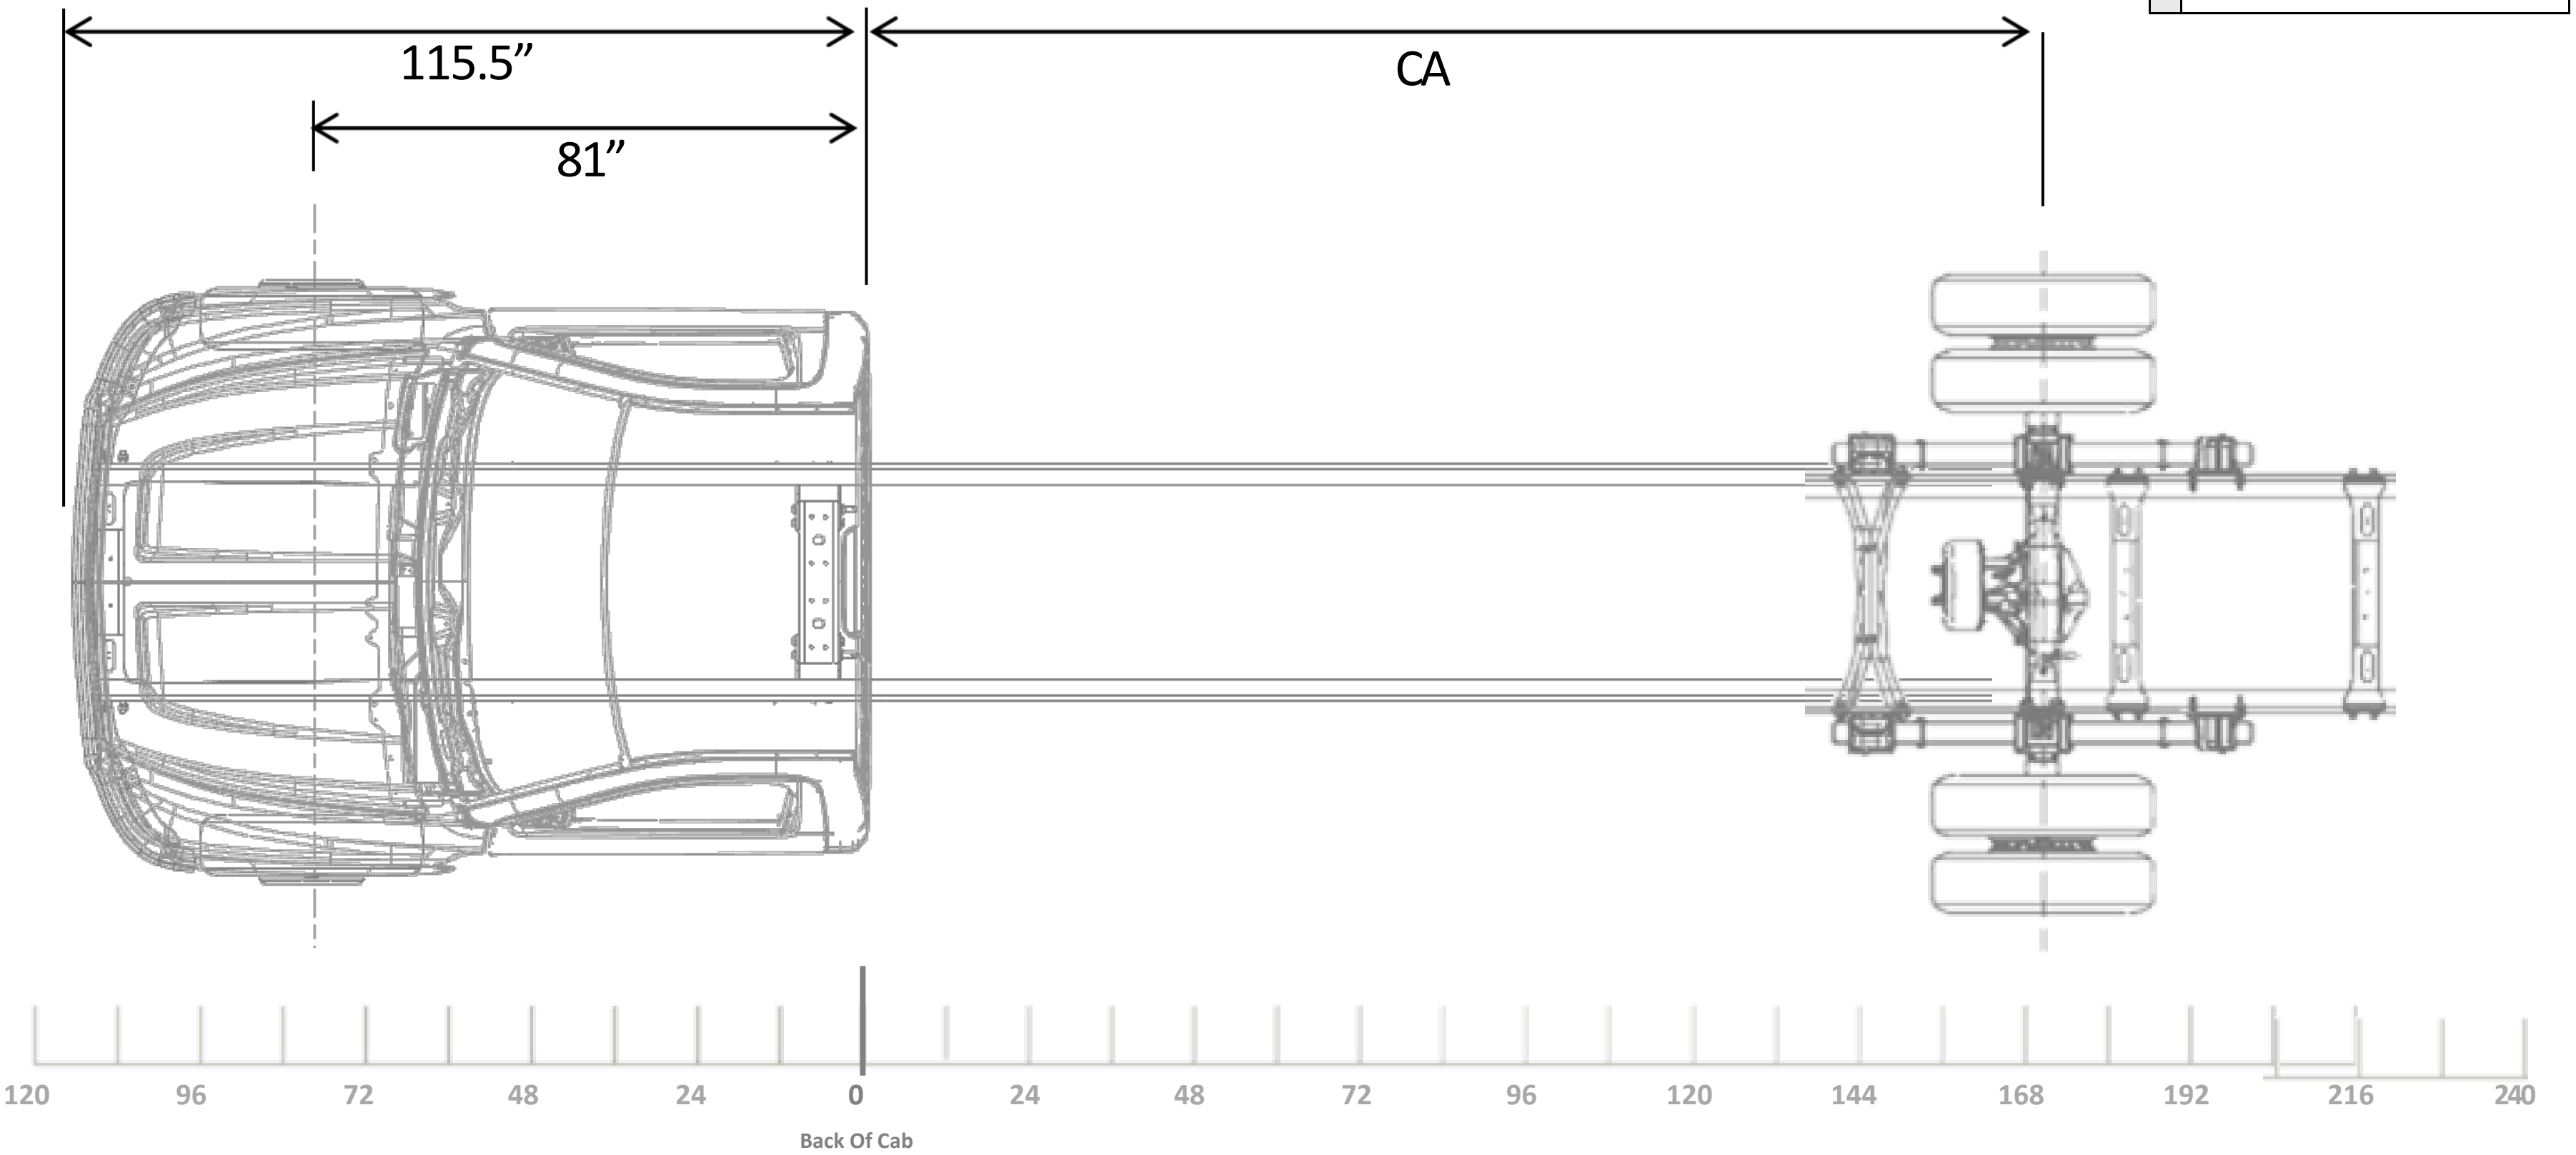
115.5”
81”
CA
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

REGULAR
CAB 165”
WB

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

RT SIDE TAILPIPE, EXITS BEHIND REAR WHEEL (RPO NPR)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

165” WB (84” CA)
49” OR 63” AF

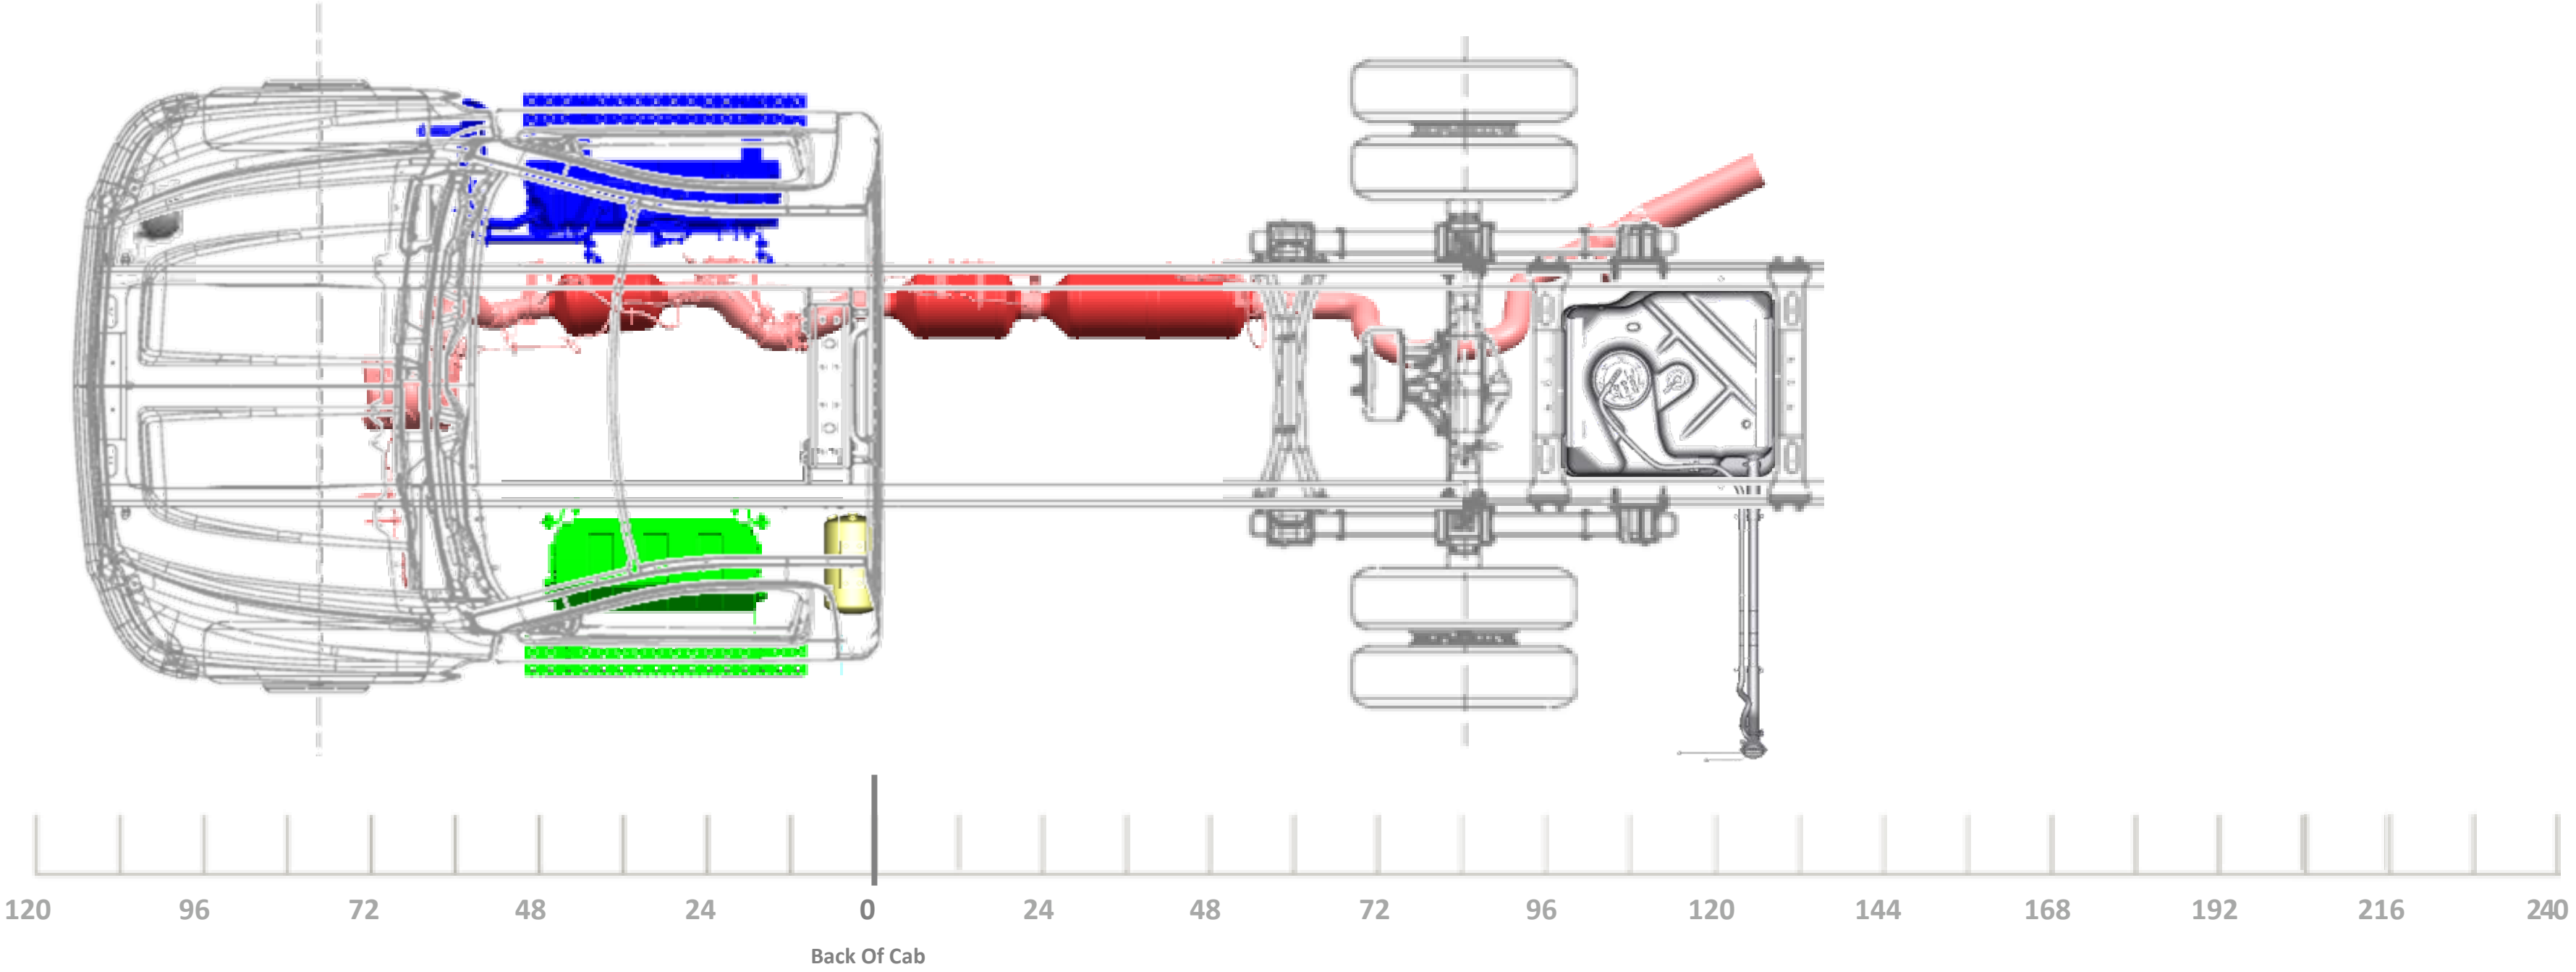
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

RT SIDE TAILPIPE, EXITS BEHIND REAR WHEEL (RPO NPR)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

165” WB (84” CA)
49” OR 63” AF

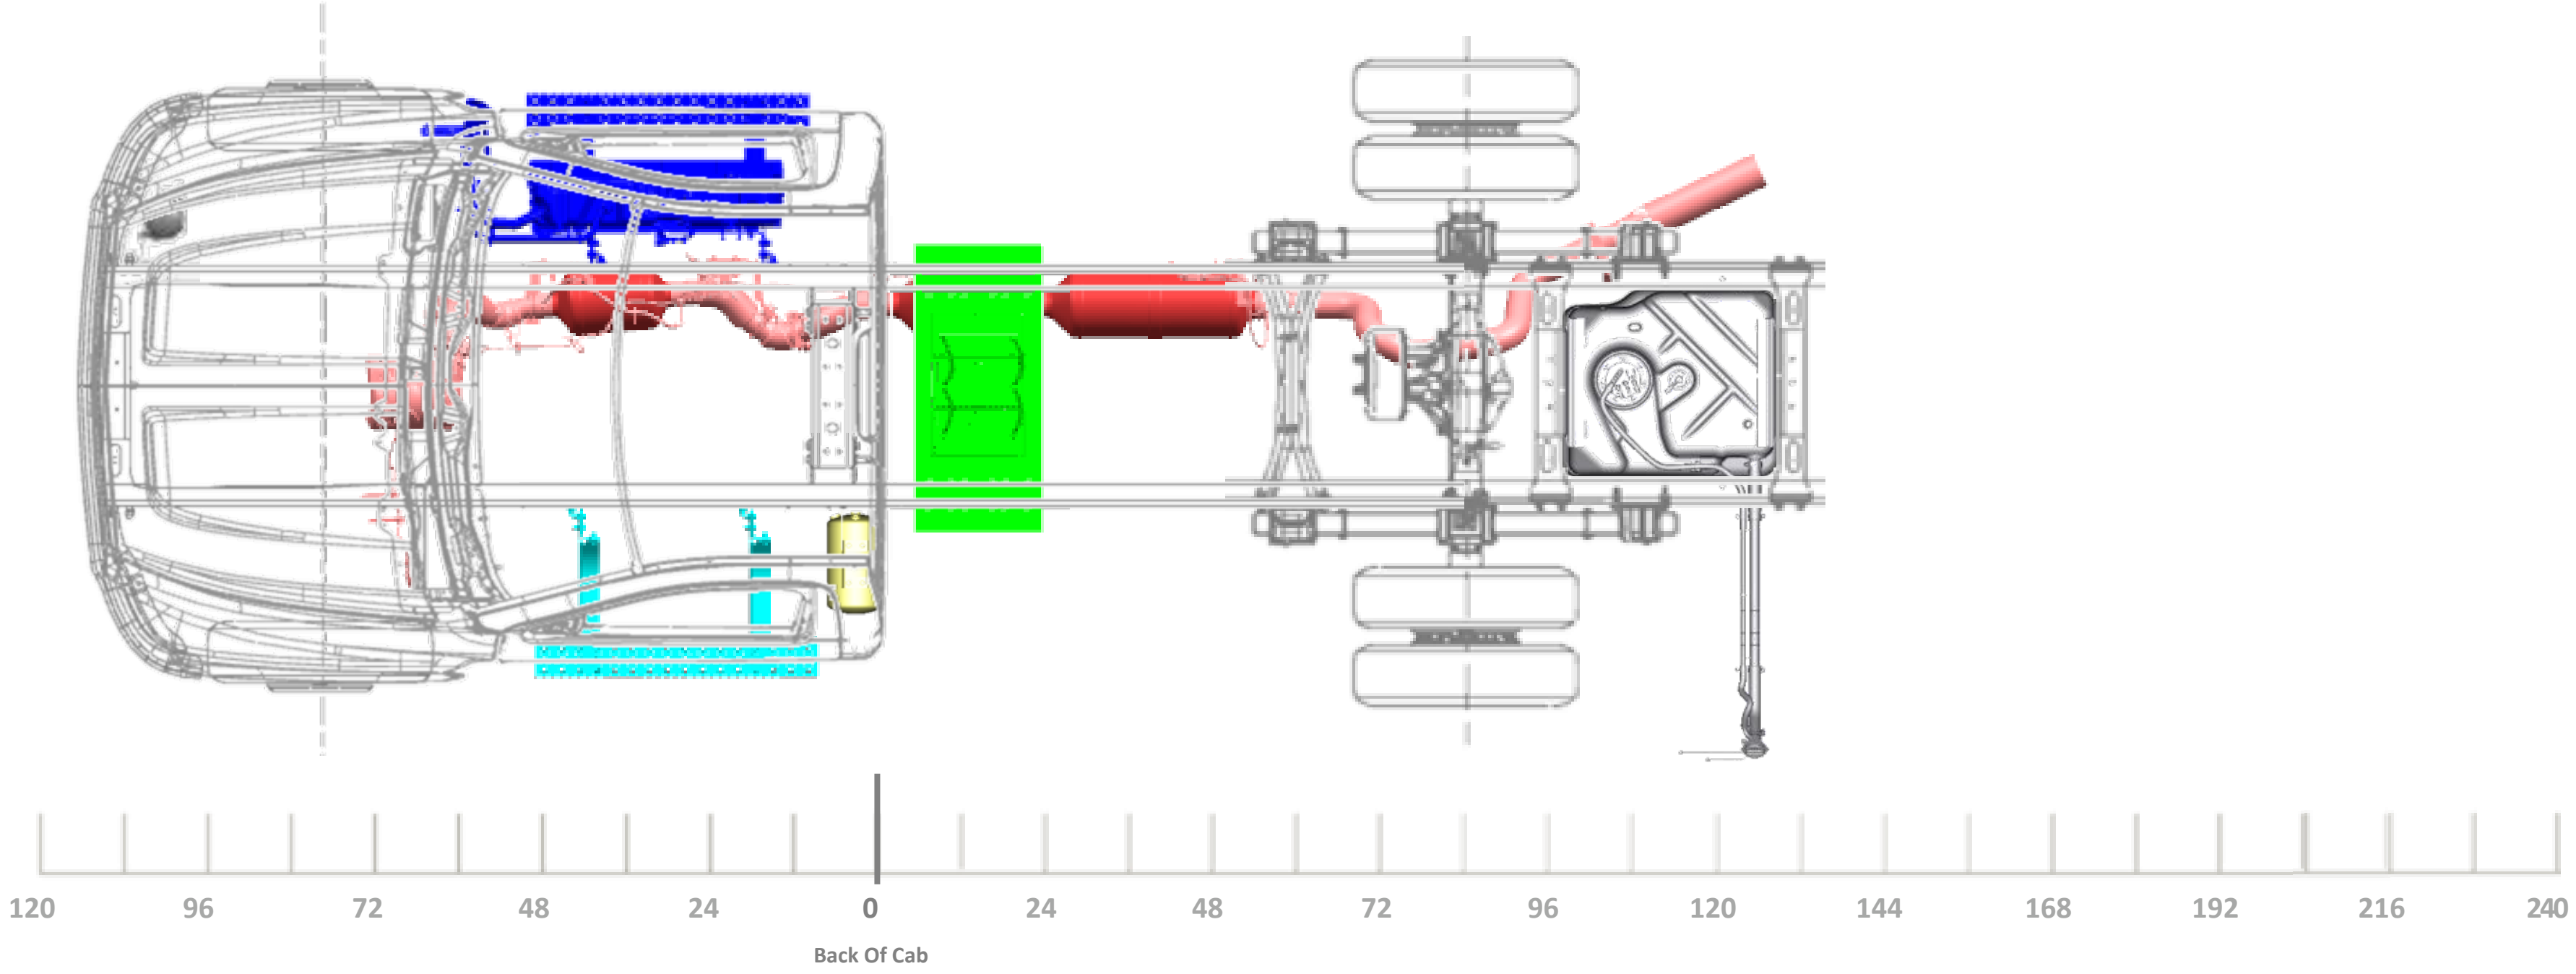
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 4/25/2024

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE SUSPENSION

RT SIDE TAILPIPE, EXITS BEHIND REAR WHEEL (RPO NPR)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

165” WB (84” CA)
49” OR 63” AF

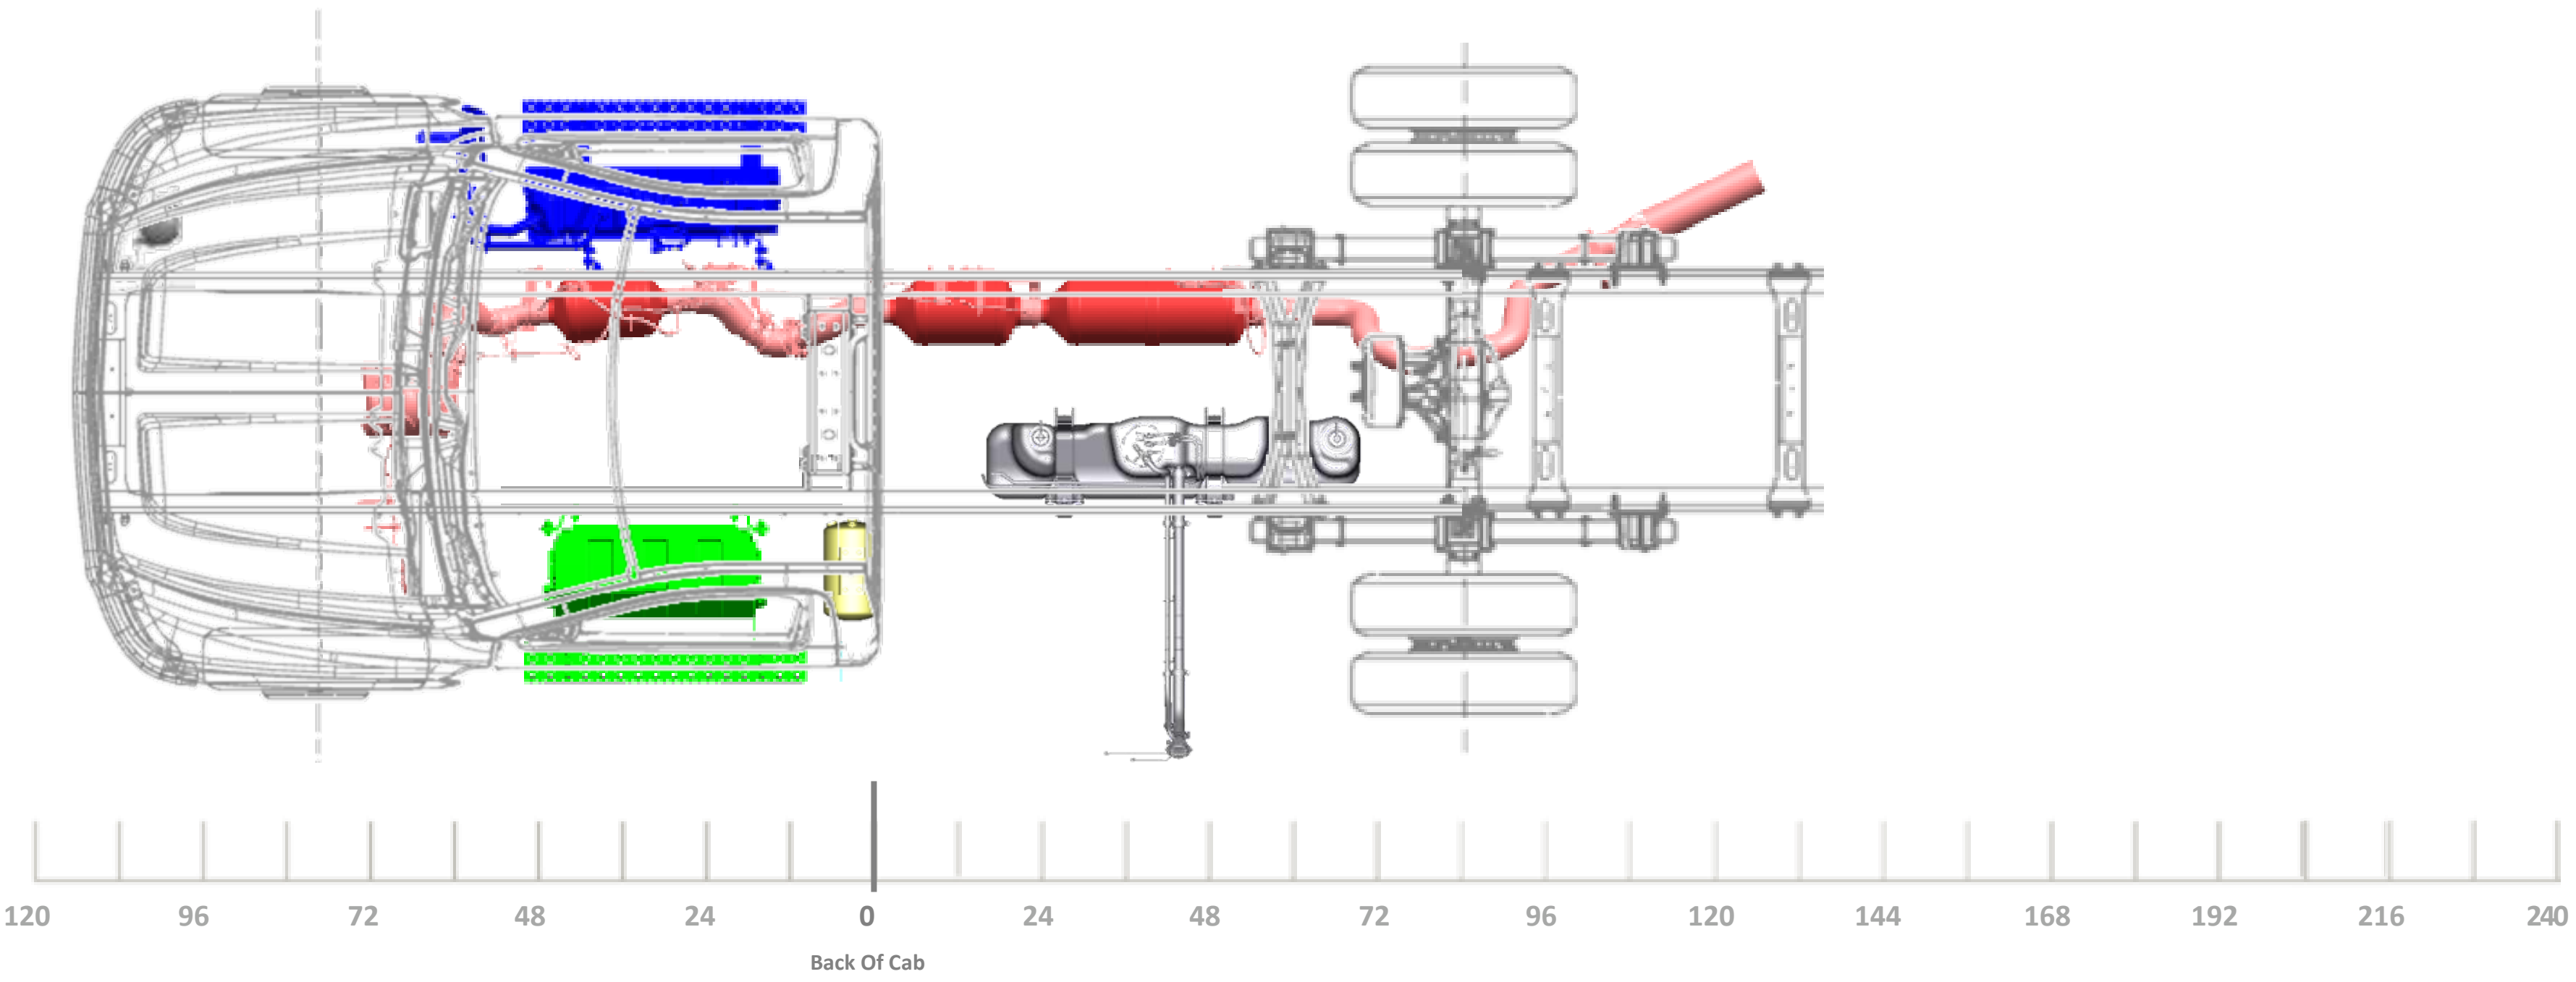
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 4/25/2024

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE SUSPENSION

RT SIDE TAILPIPE, EXITS BEHIND REAR WHEEL (RPO NPR)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

165” WB (84” CA)
49” OR 63” AF

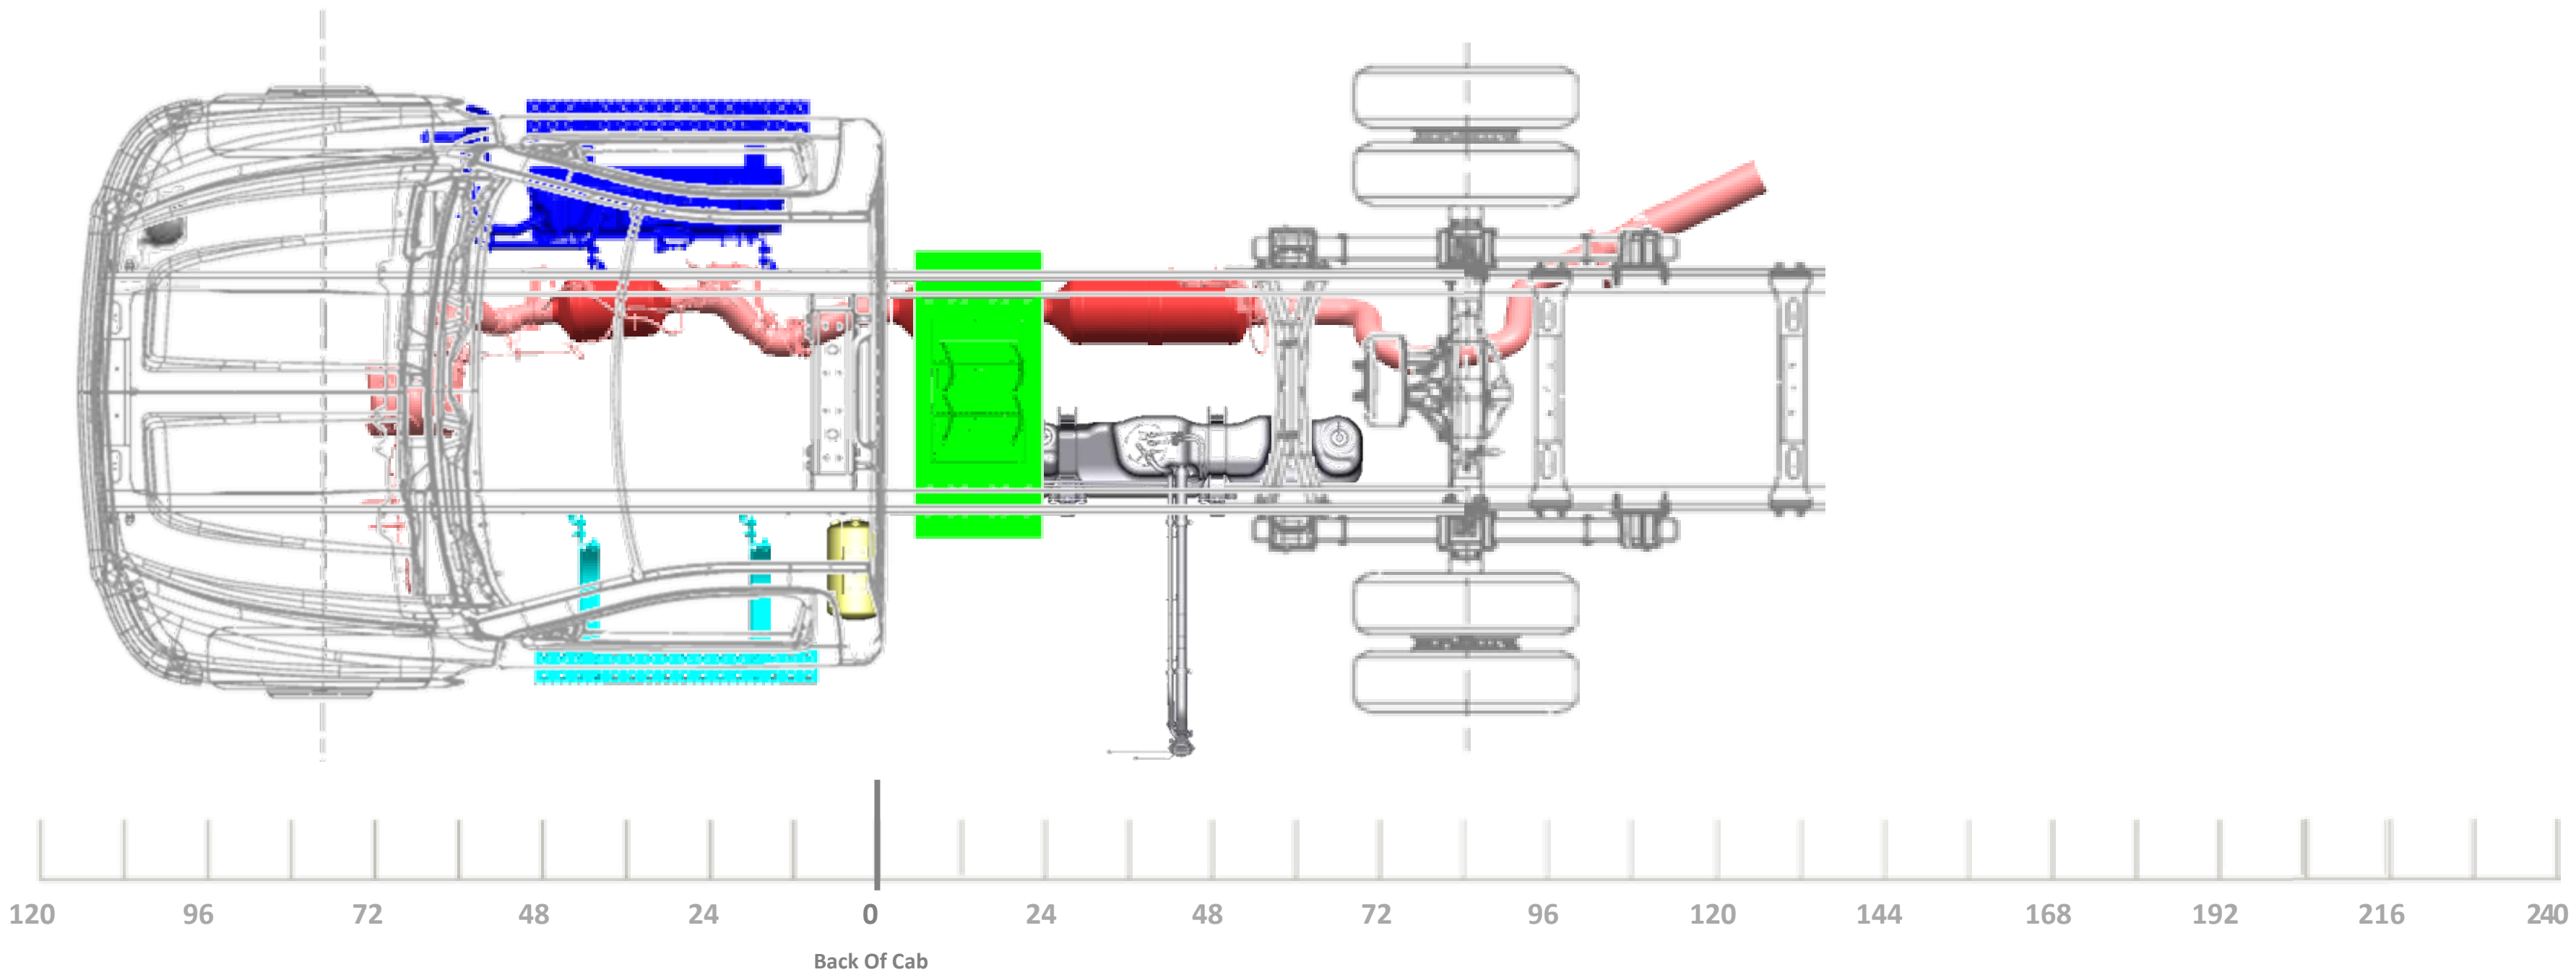

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 4/25/2024

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

RT SIDE TAILPIPE, EXITS BEHIND REAR WHEEL (RPO NPR)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

165” WB (84” CA)
49” OR 63” AF

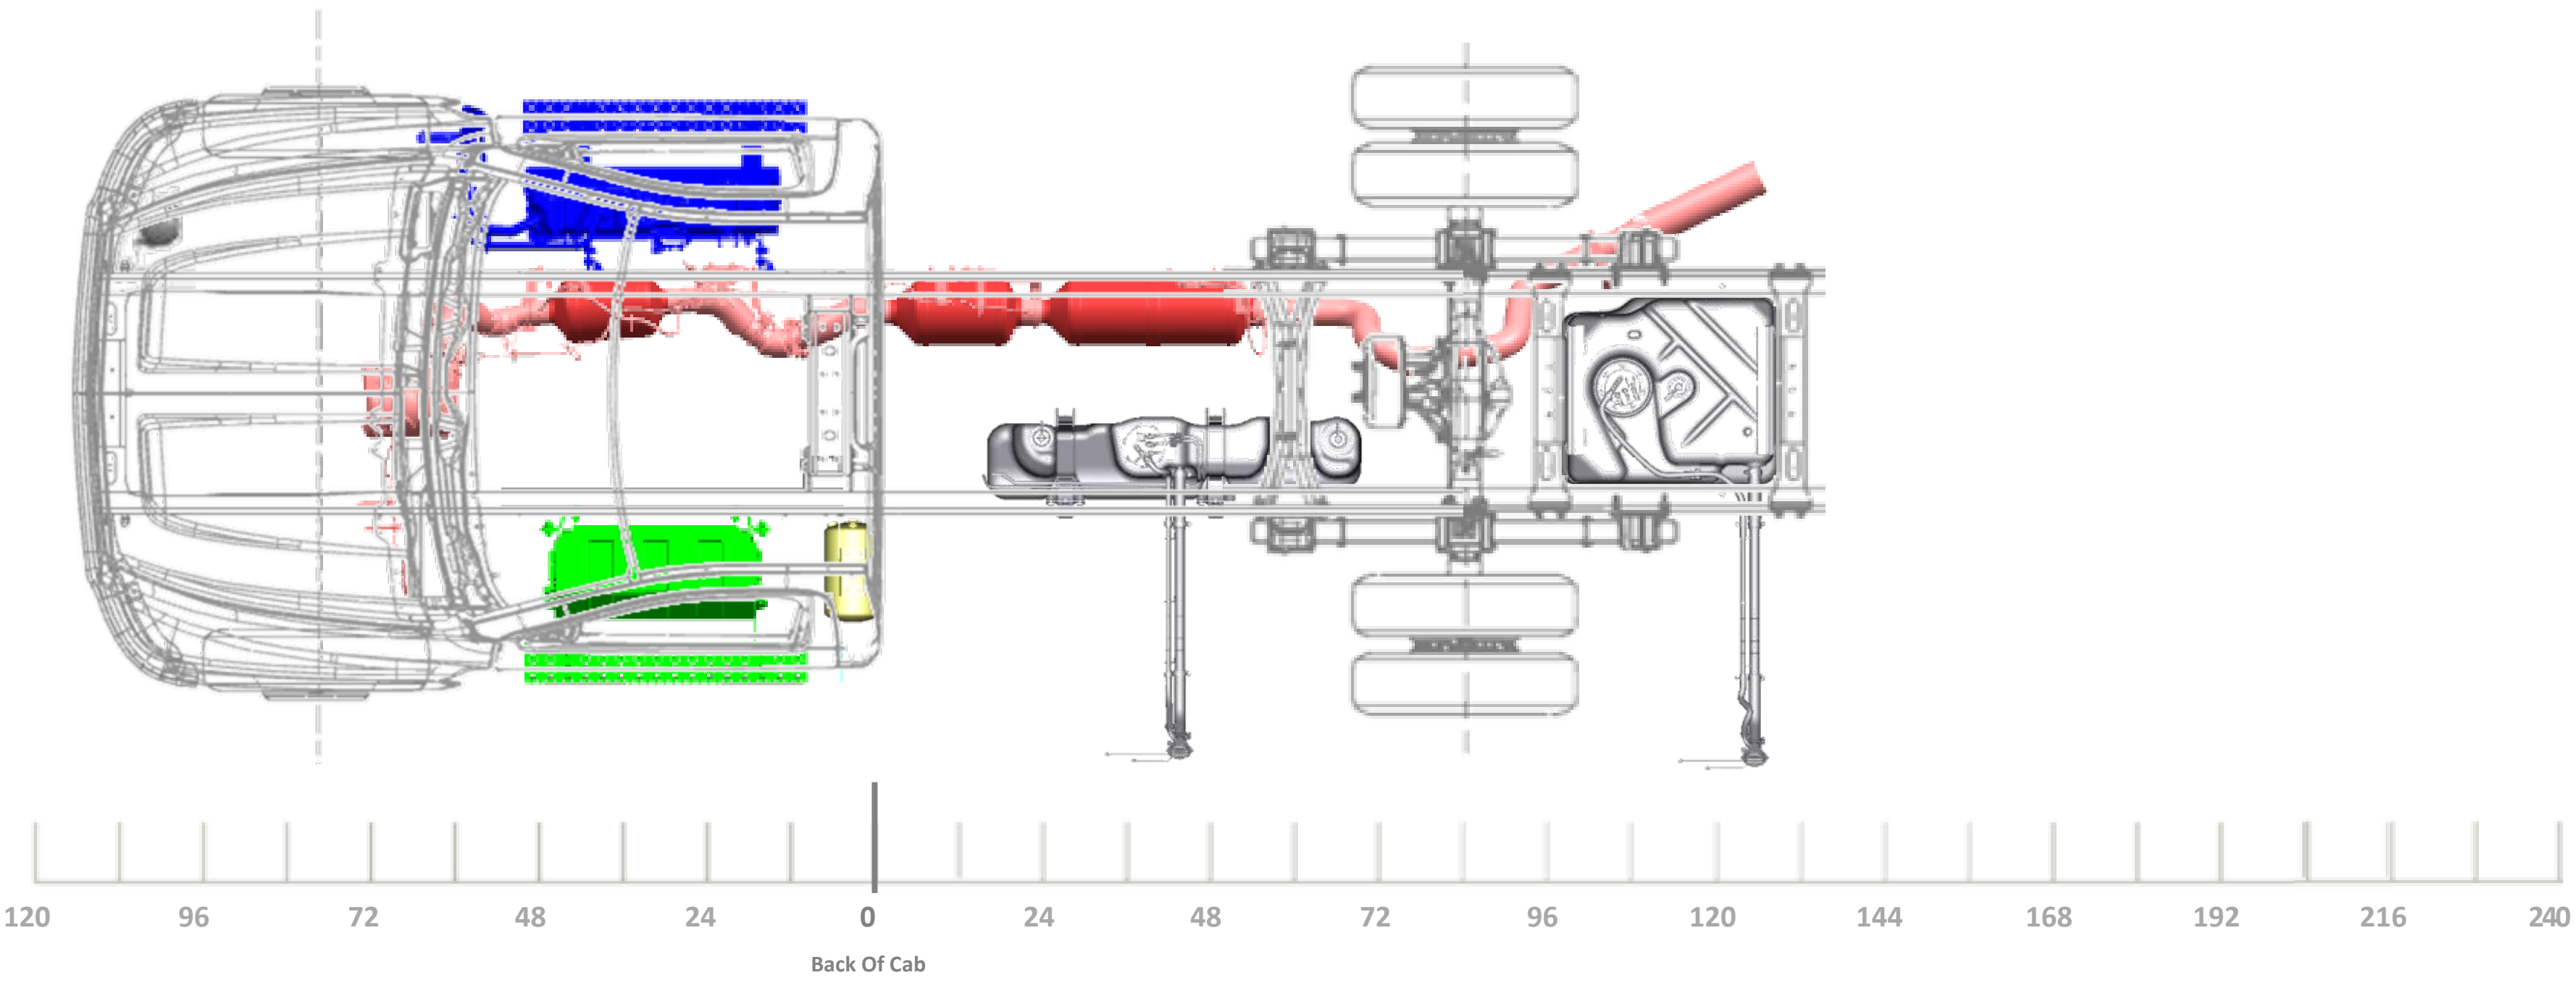
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 4/25/2024

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

RT SIDE TAILPIPE, EXITS BEHIND
REAR WHEEL (RPO NPR)

OPTIONAL AIR DRYER FWD OUTSIDE
RT (RPO KUT/JPY)

Minimum Wheelbase

165” WB (84” CA)
49” OR 63” AF

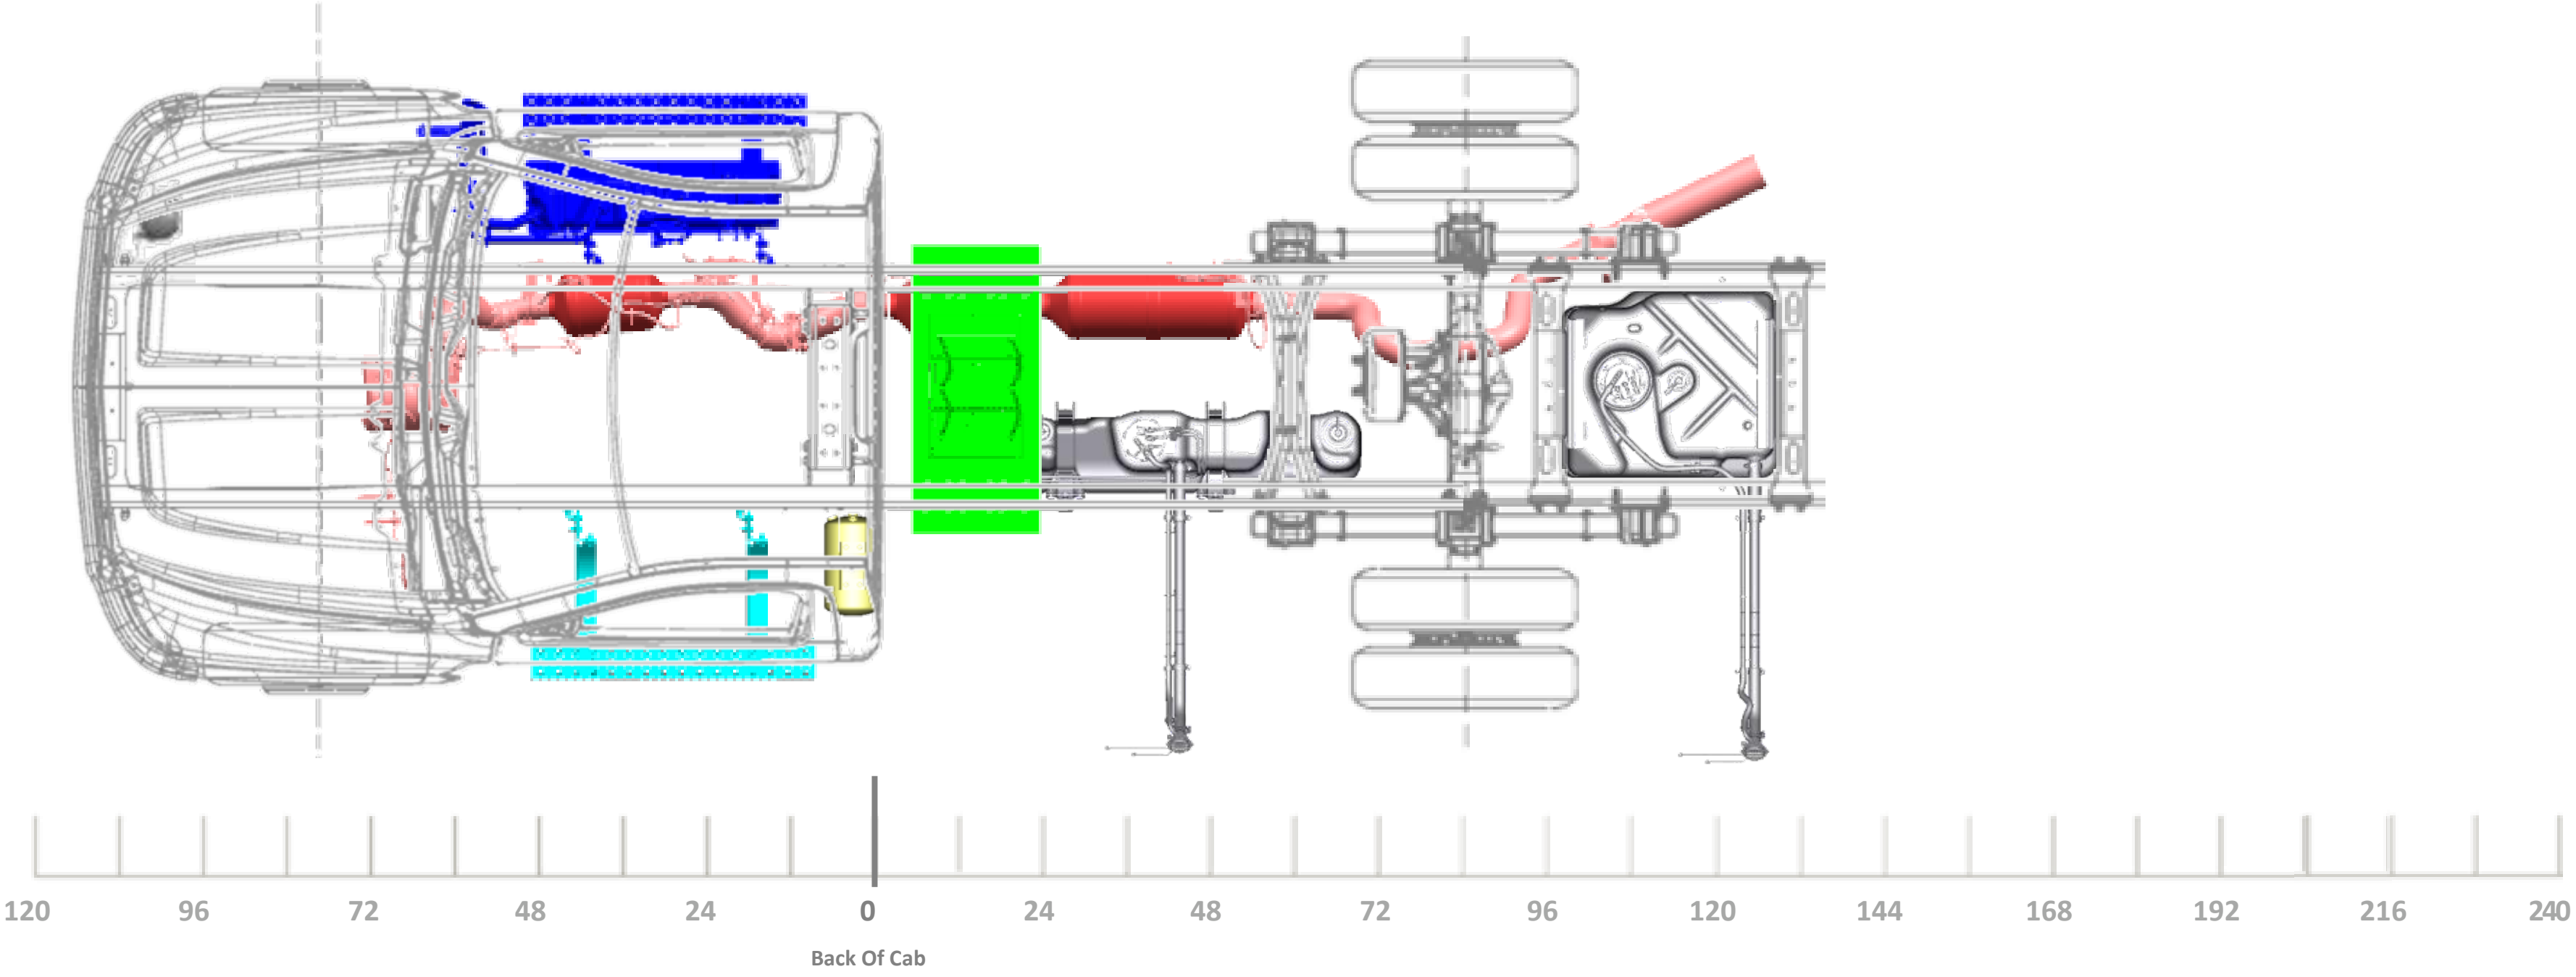

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 4/25/2024

Public

REGULAR
CAB 189”
WB

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

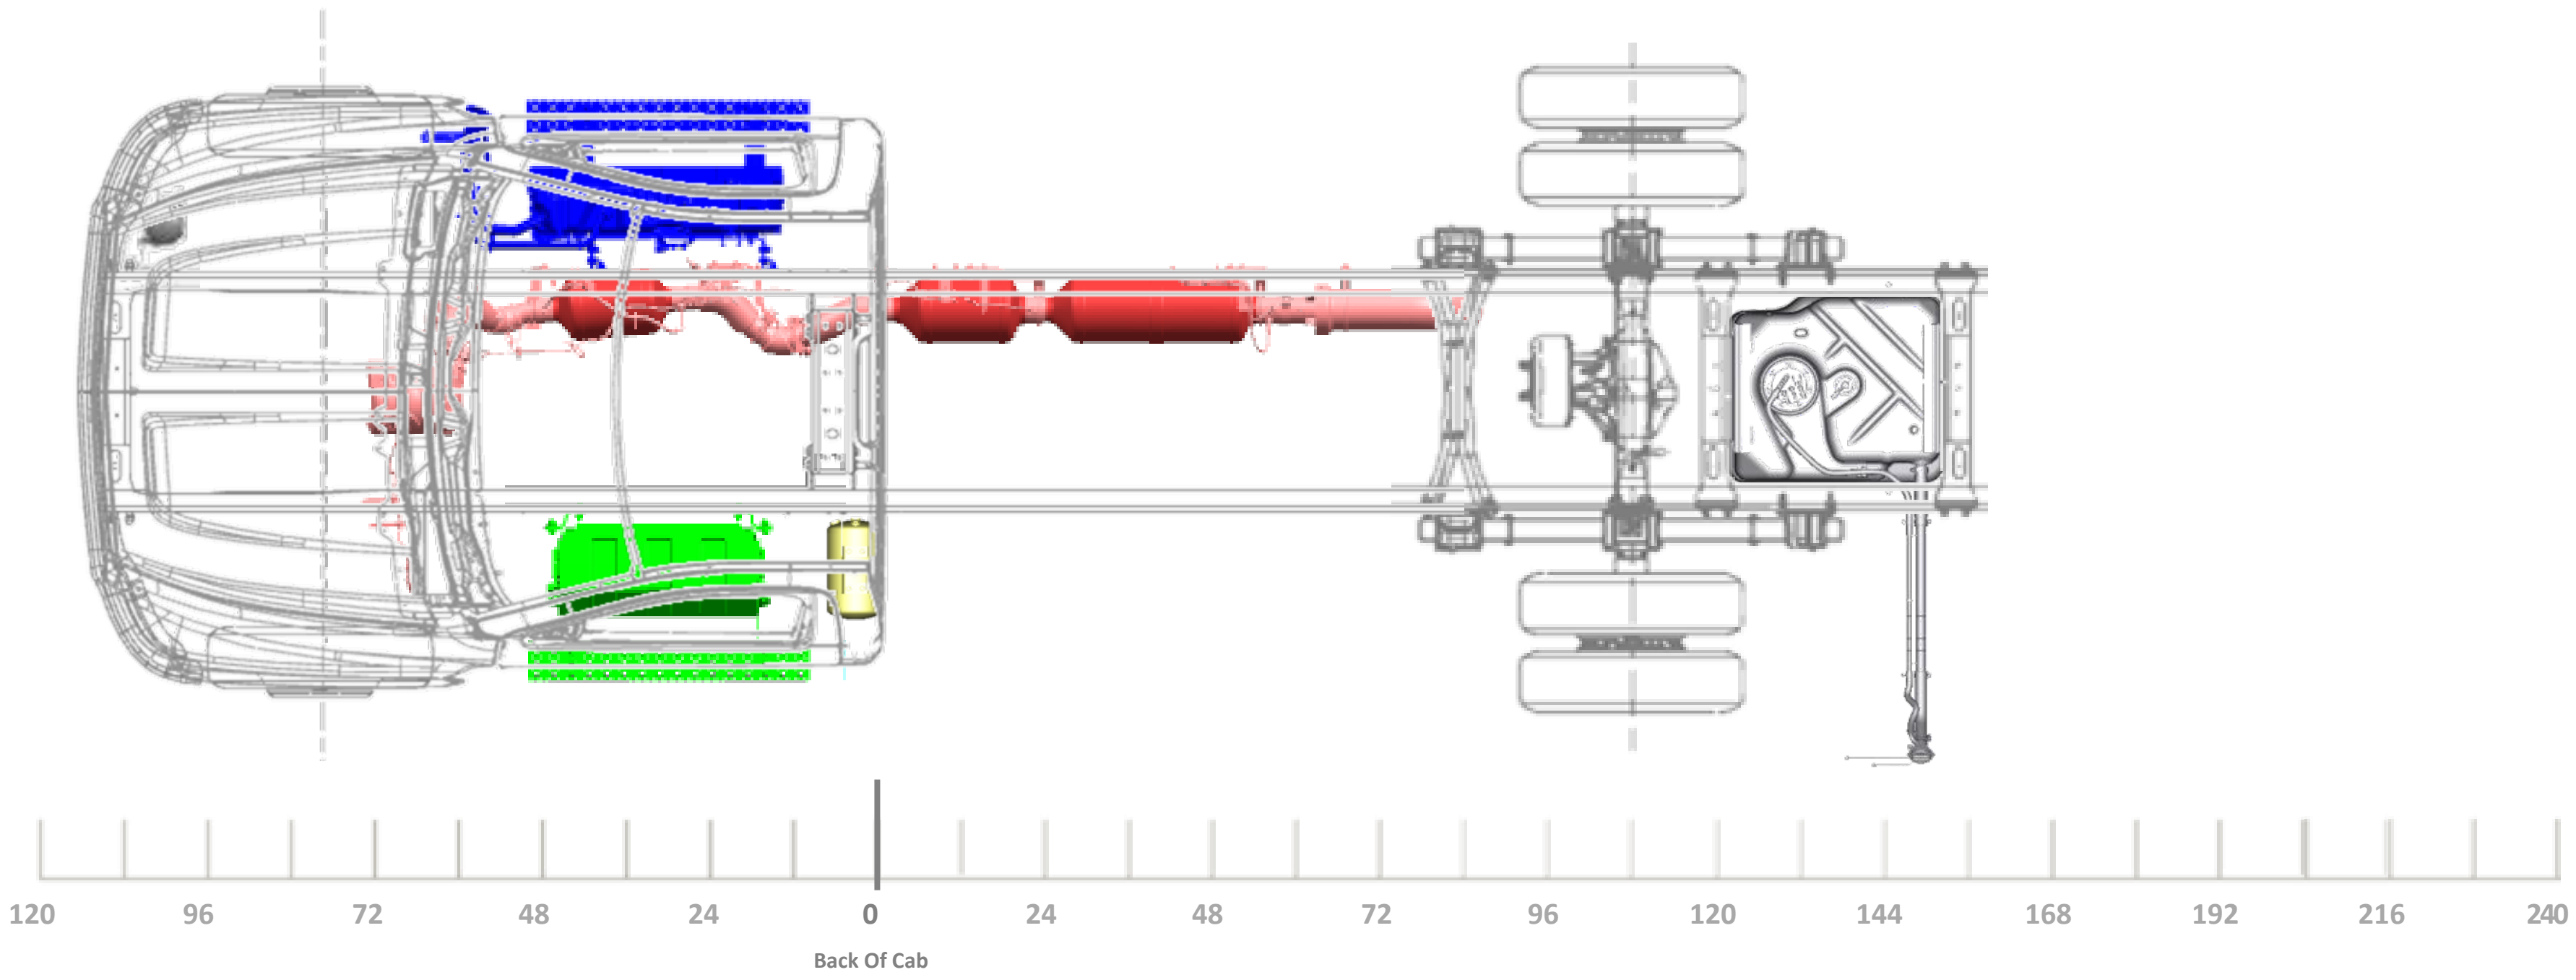
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION REAR AIR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

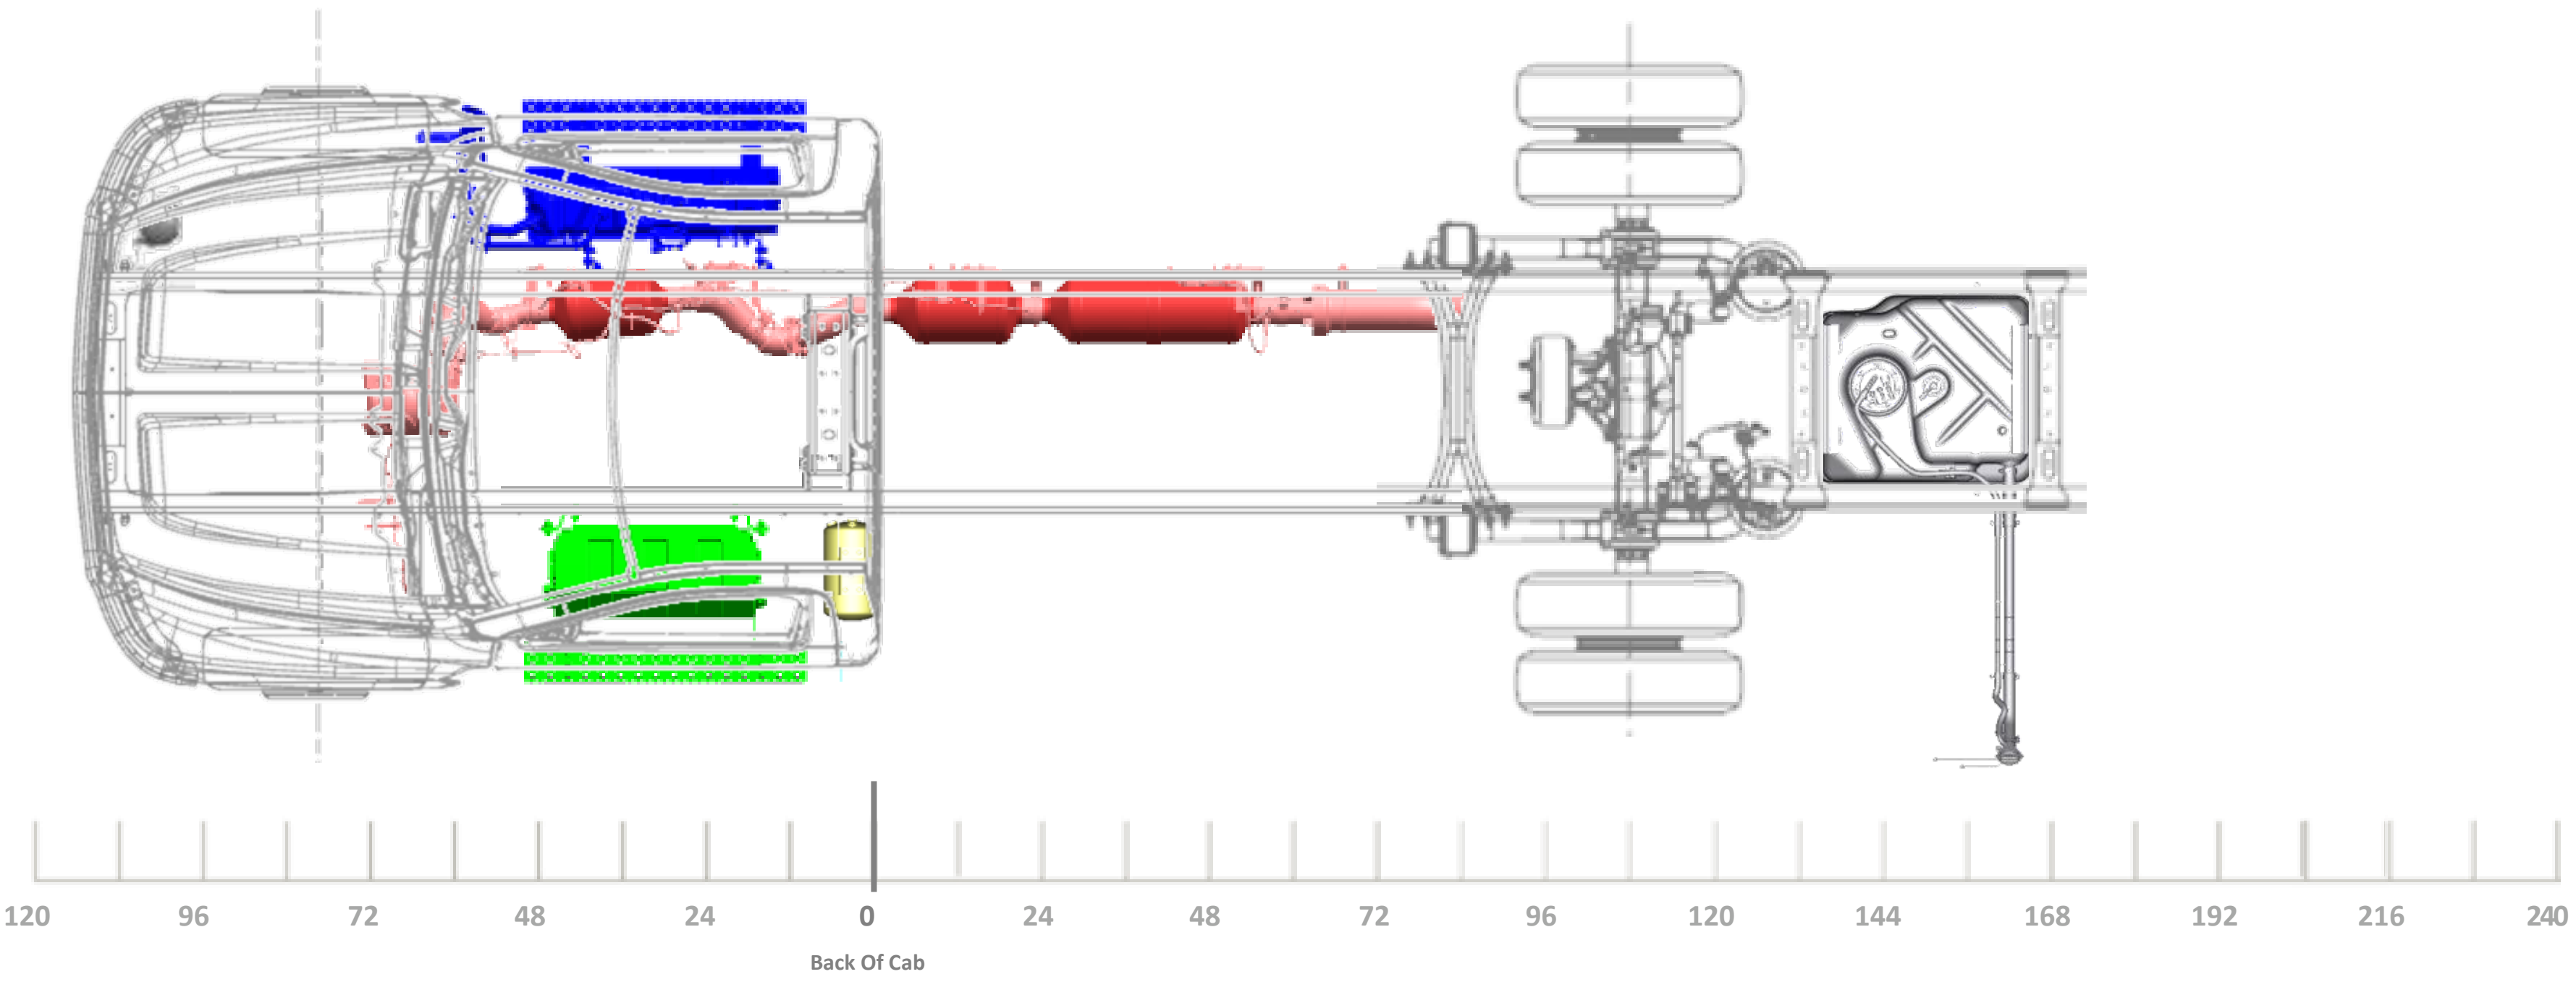

120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

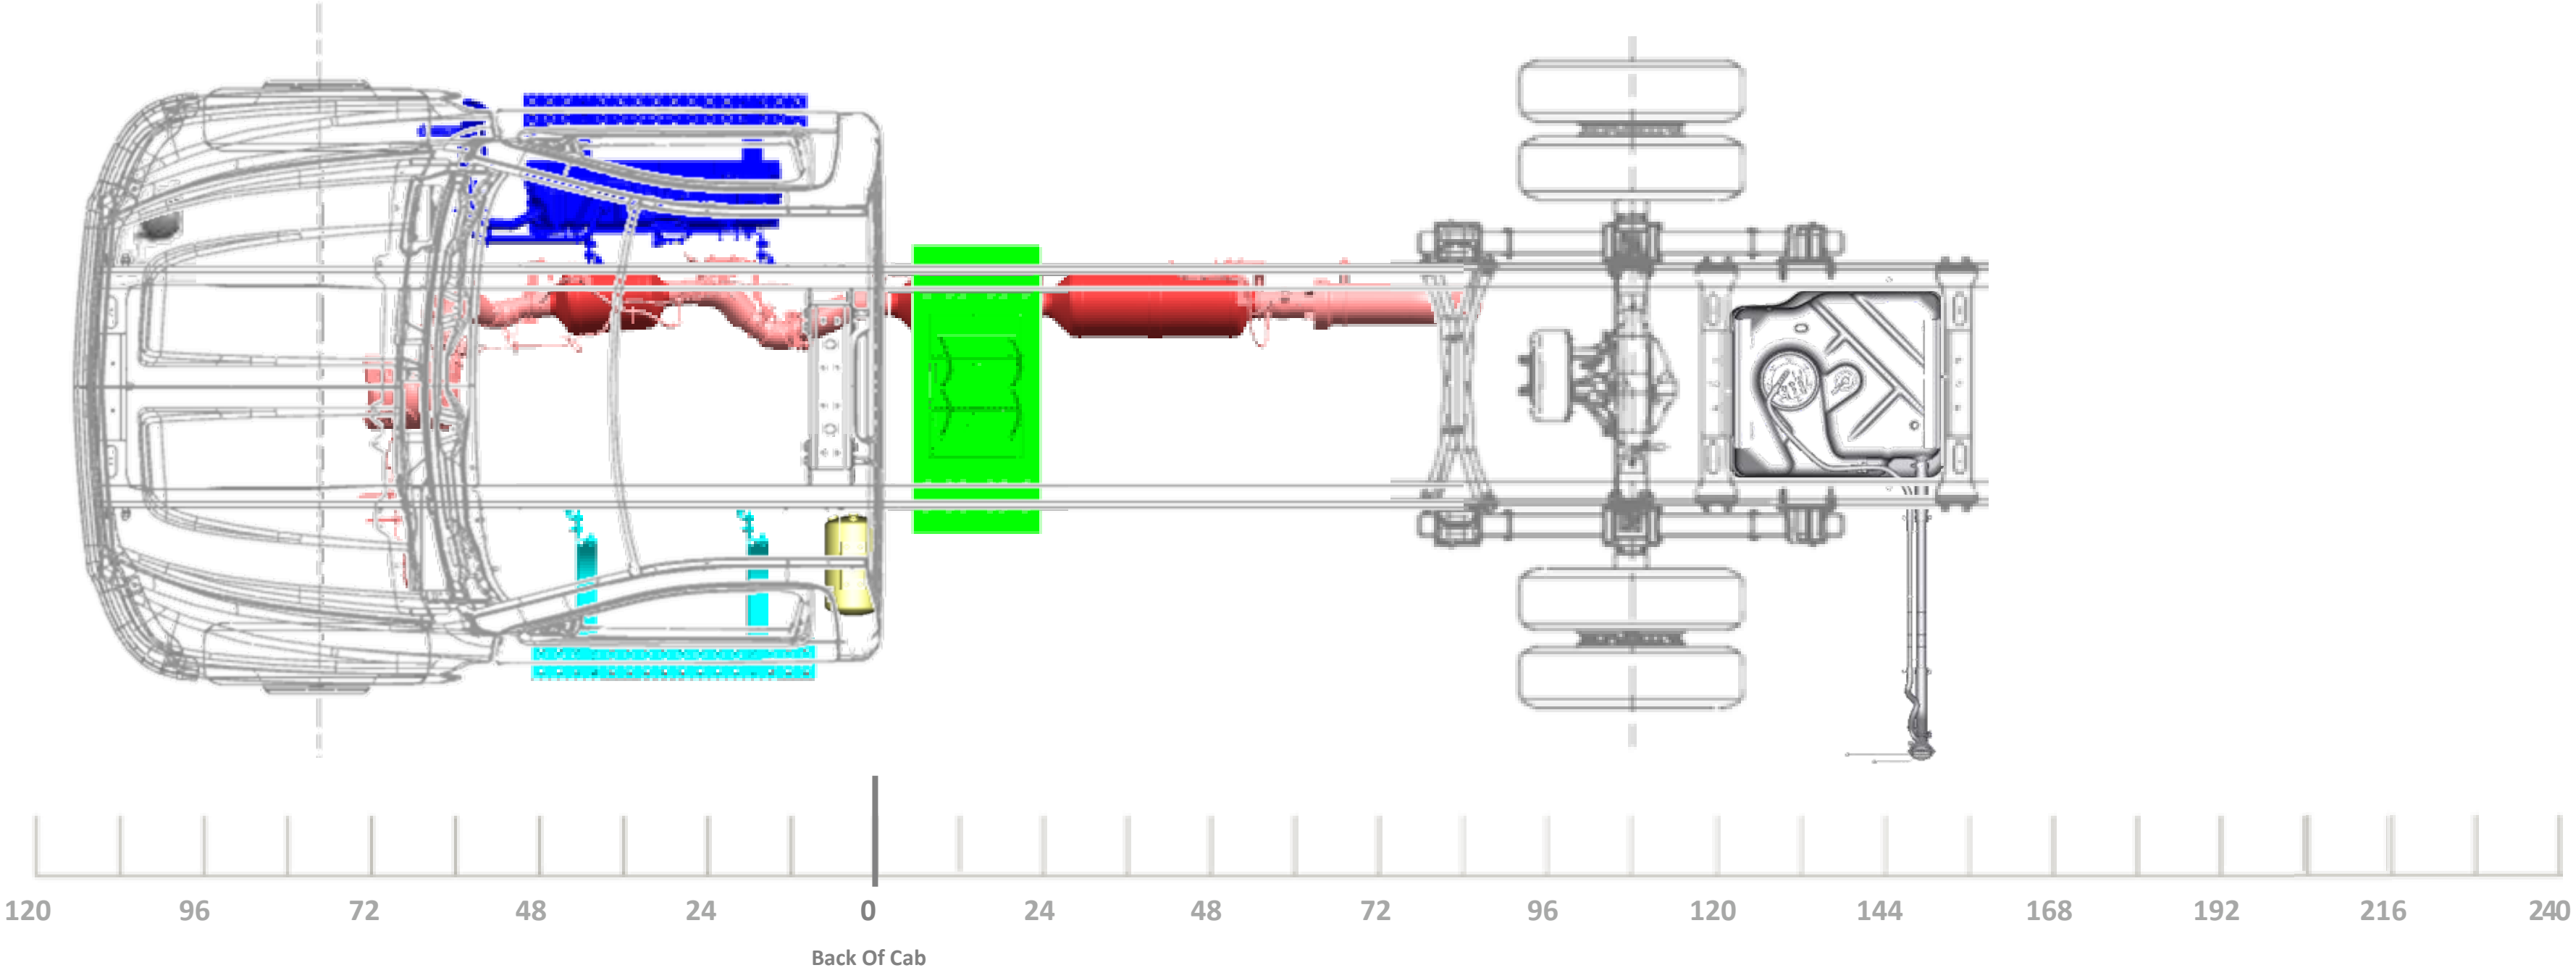
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

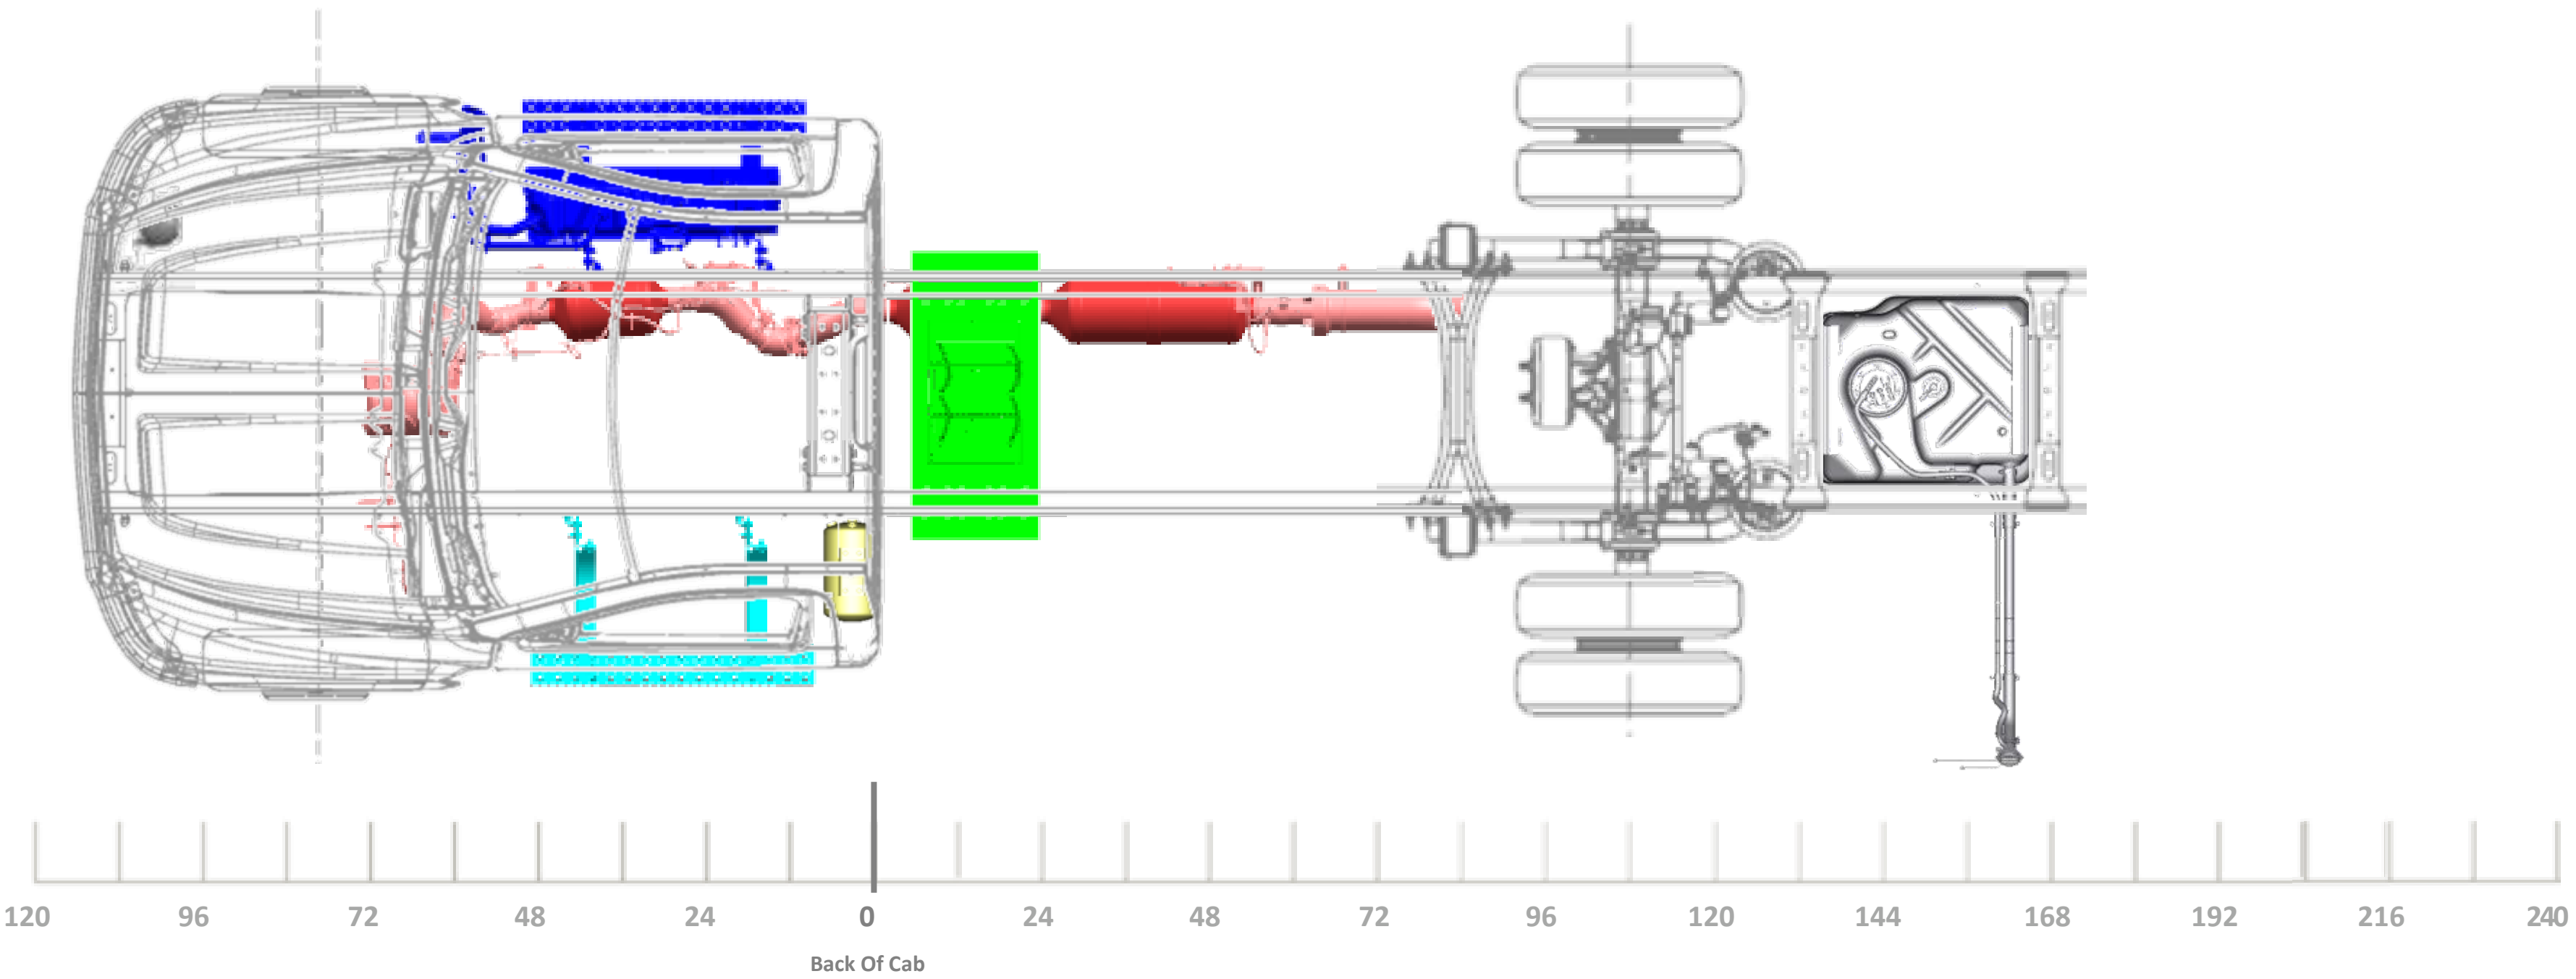
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

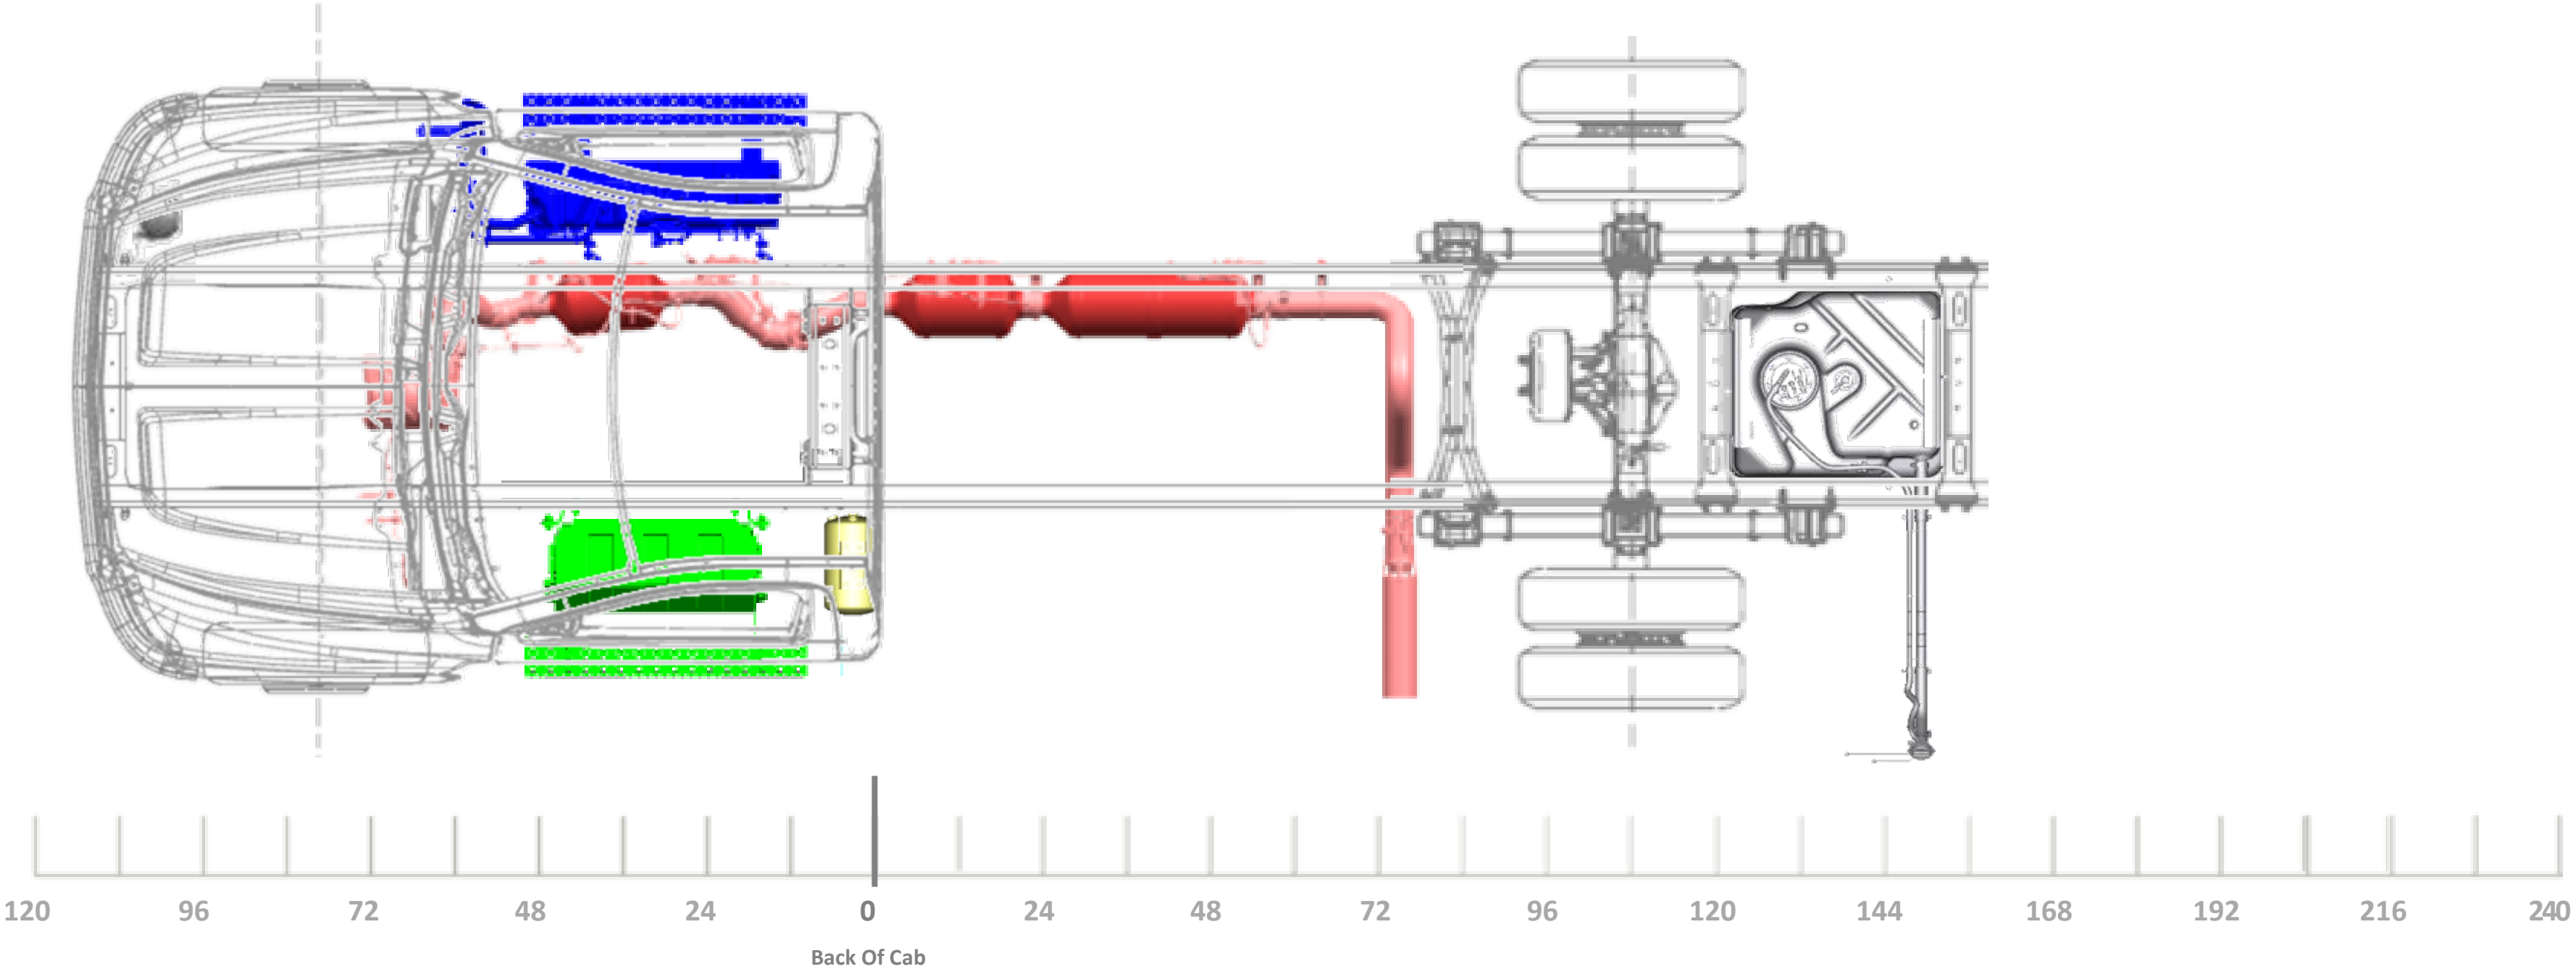
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

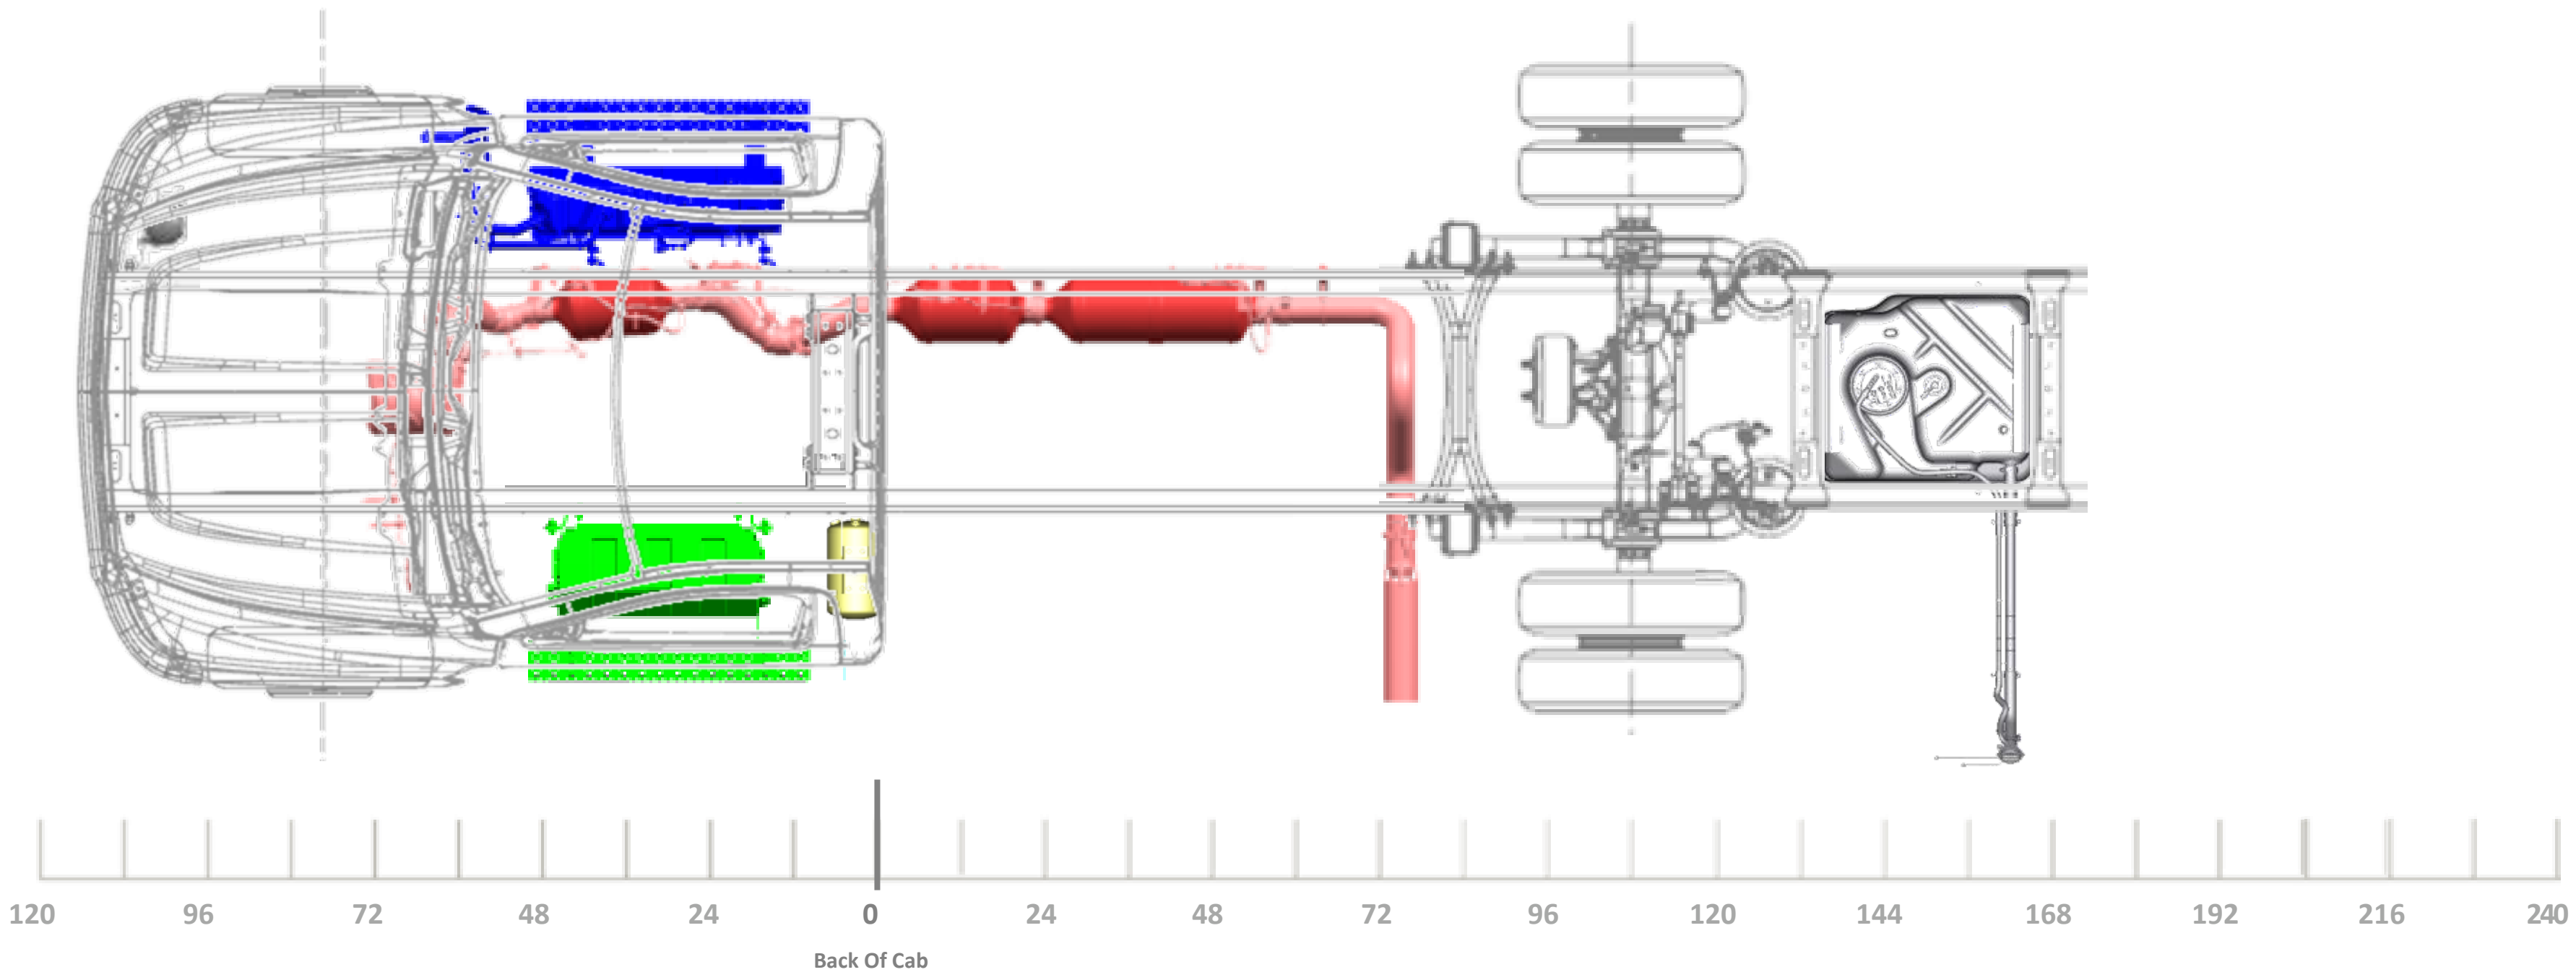
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

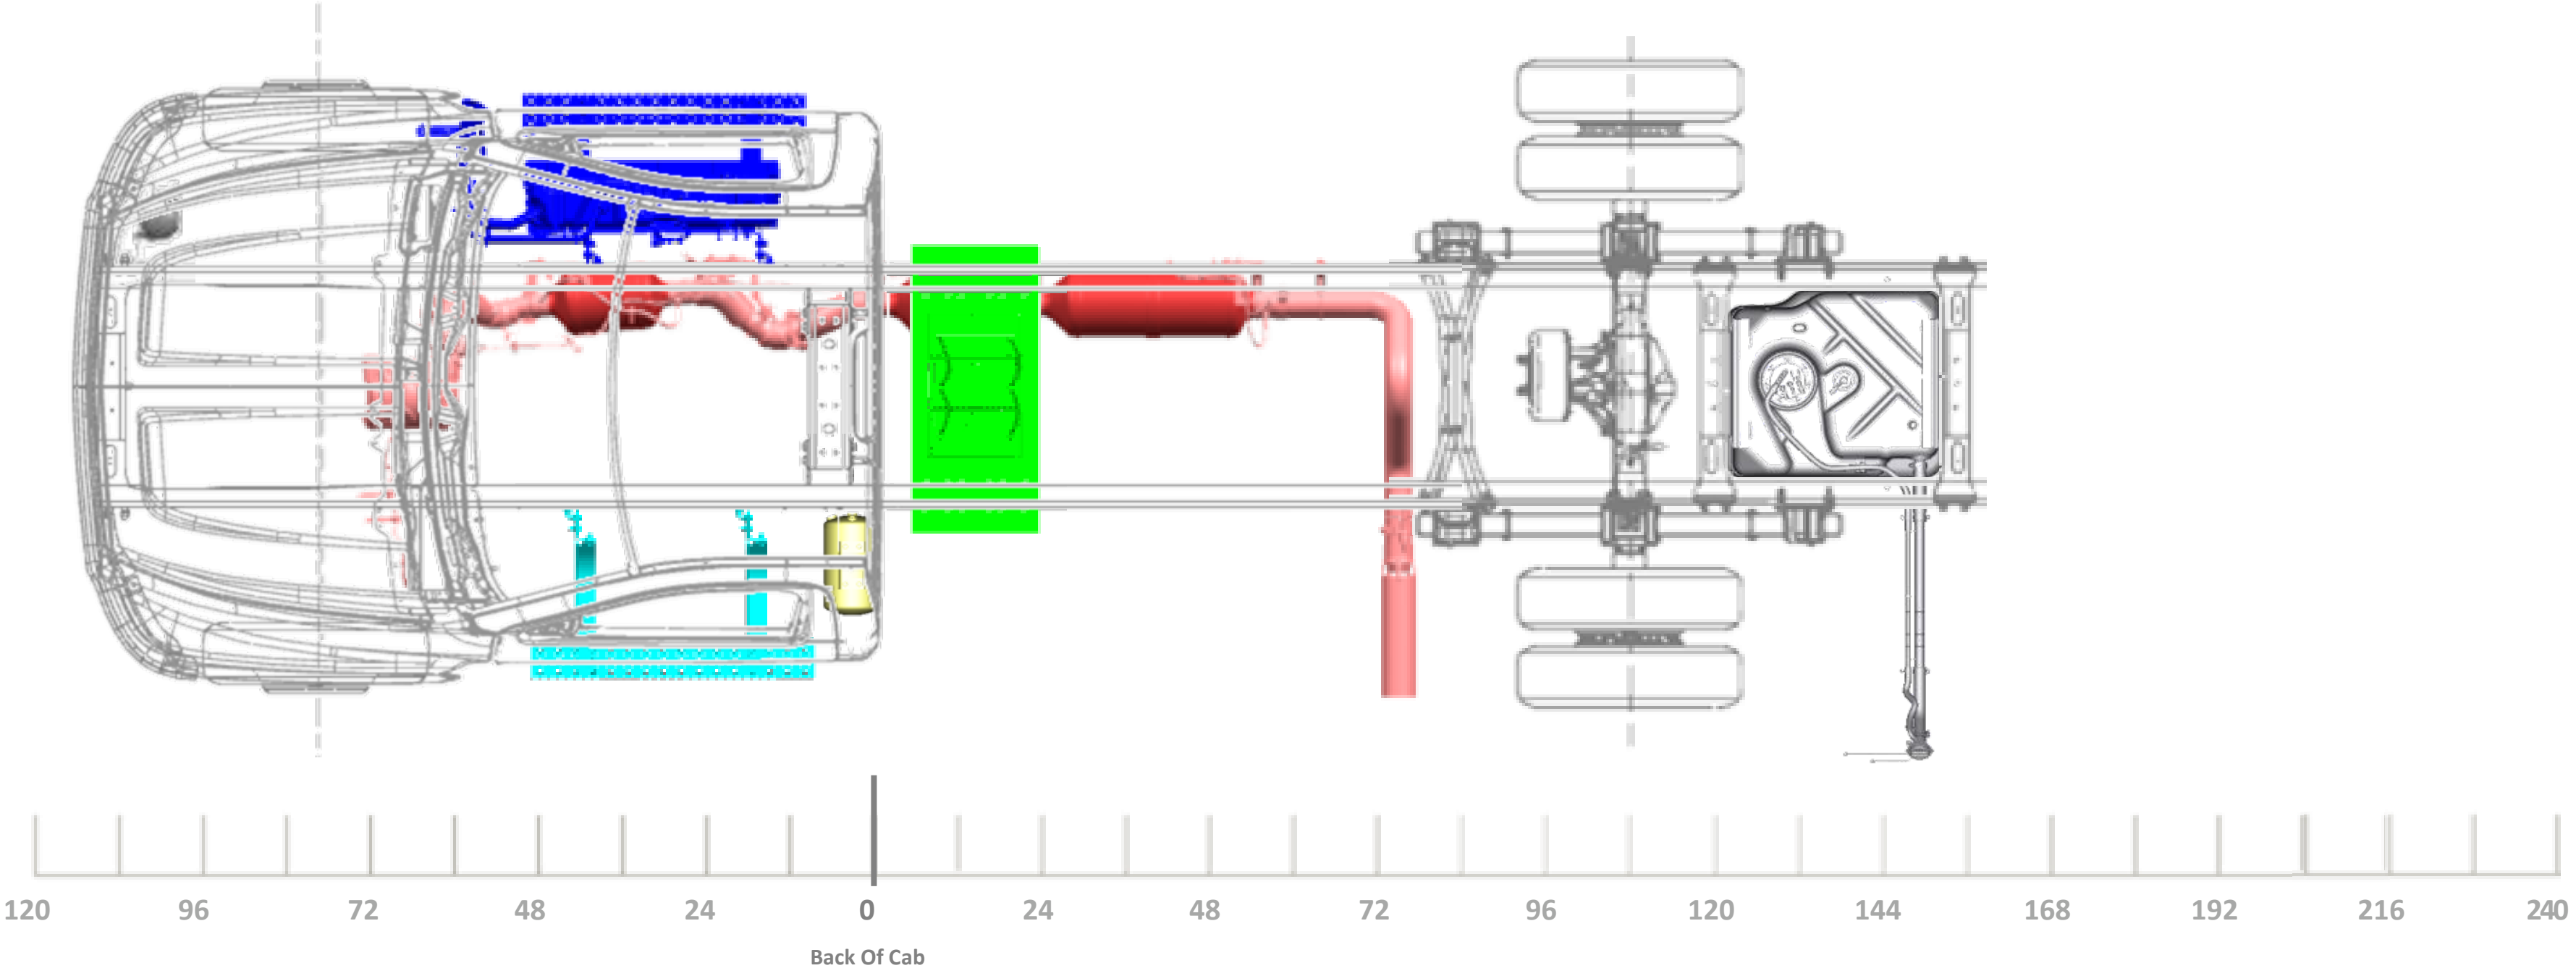
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

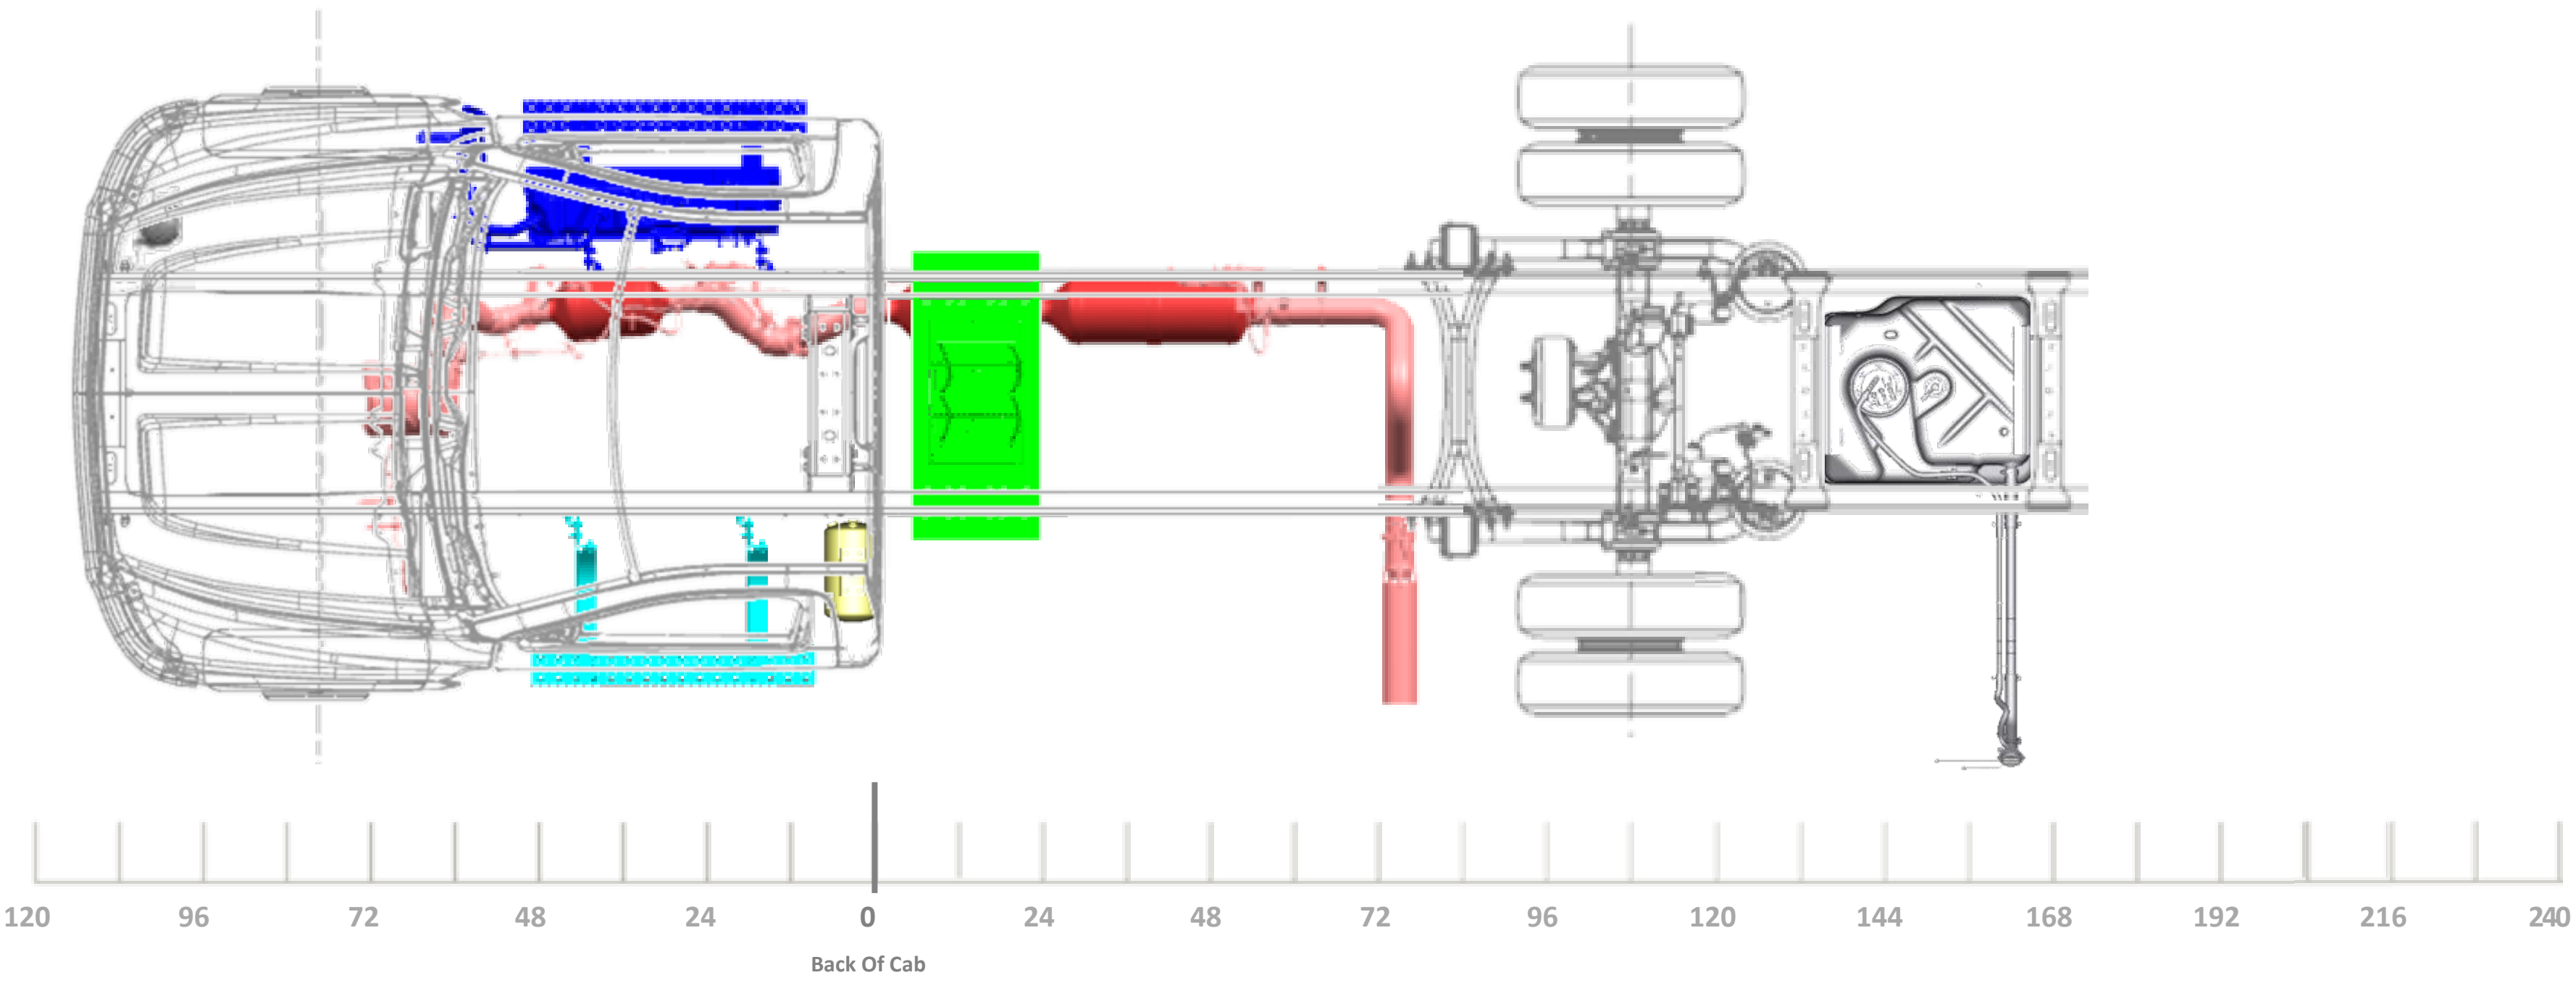

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

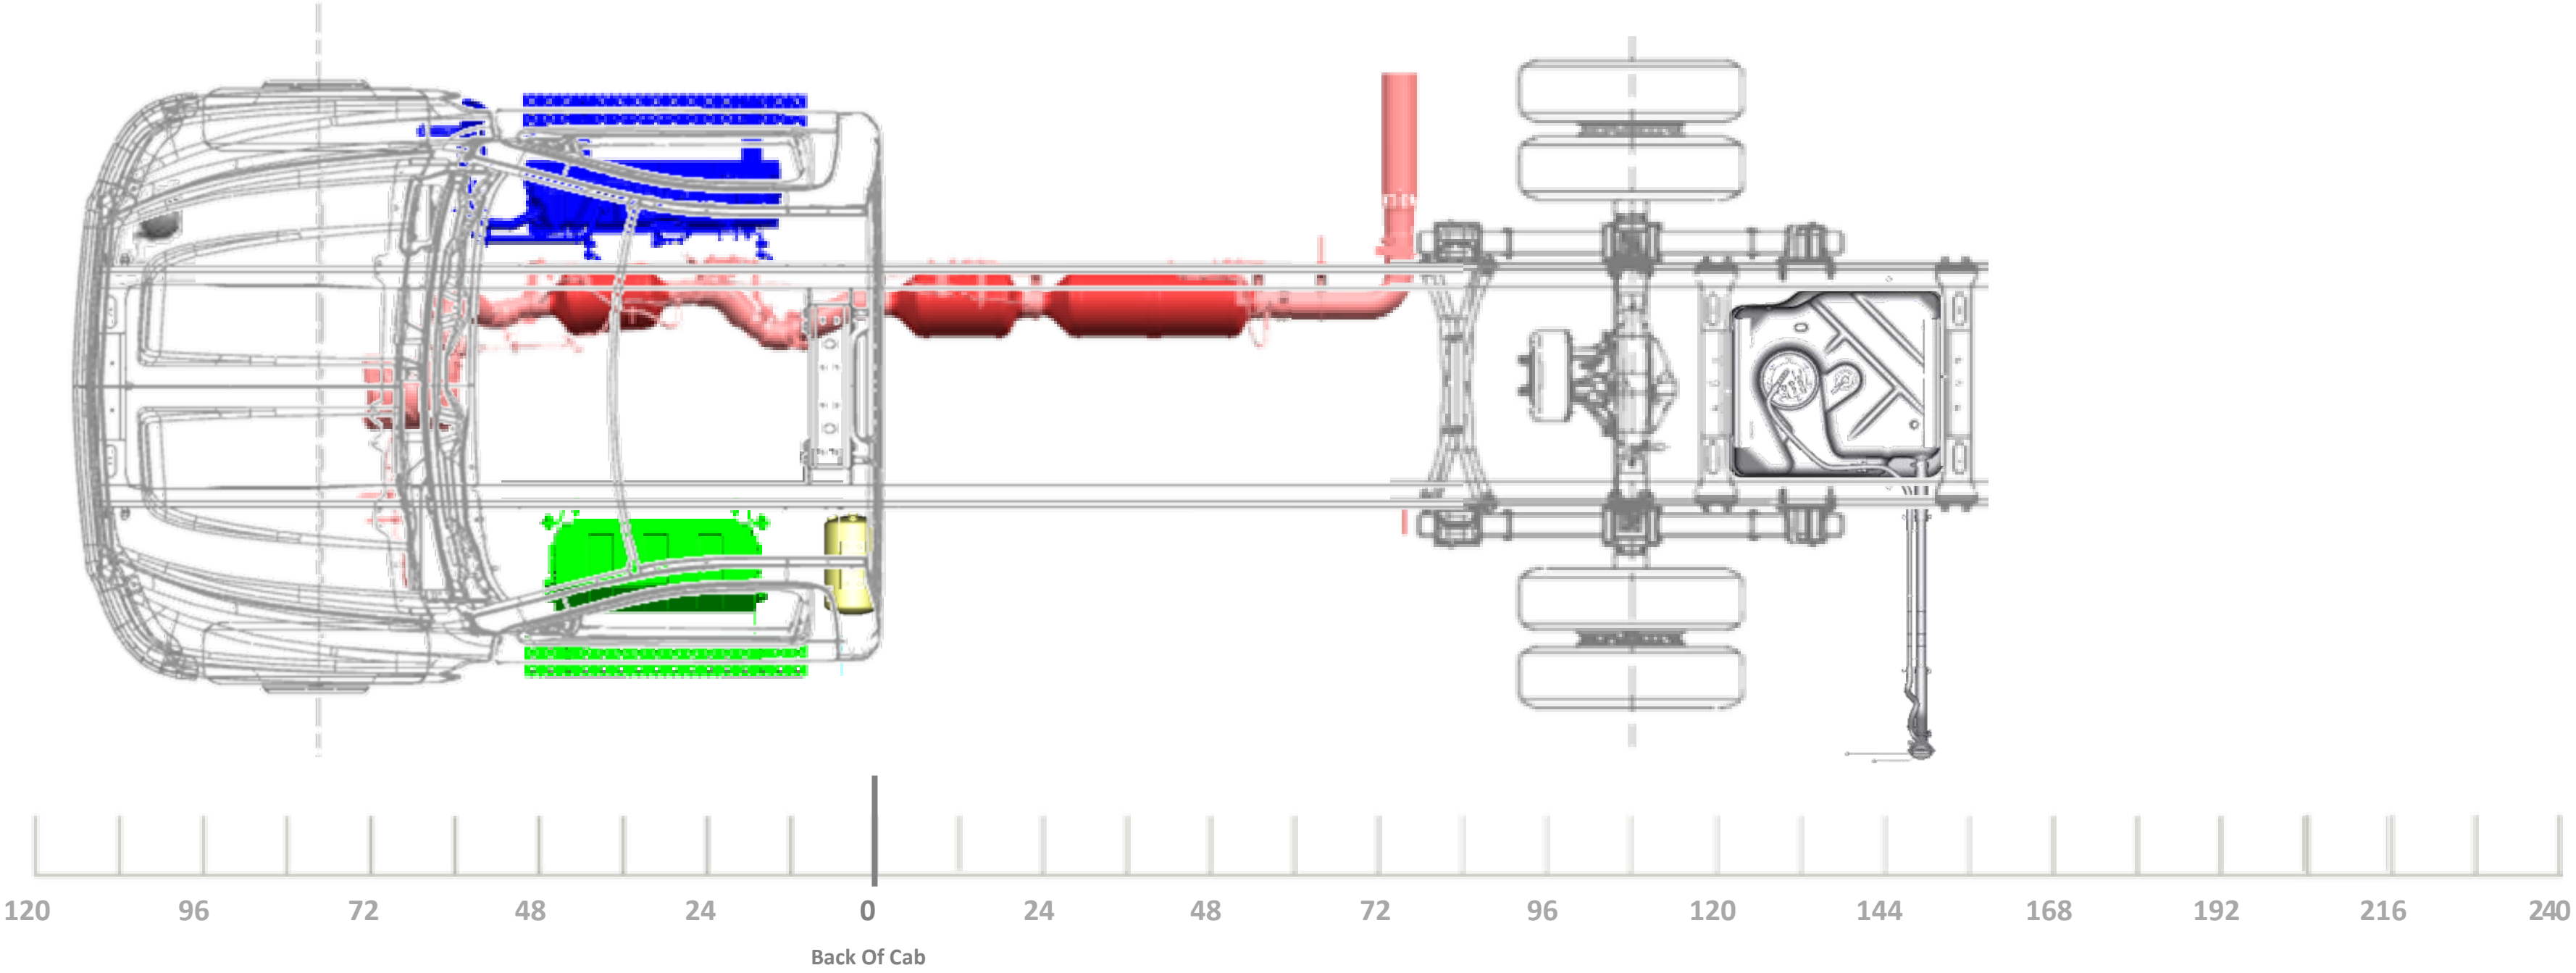
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

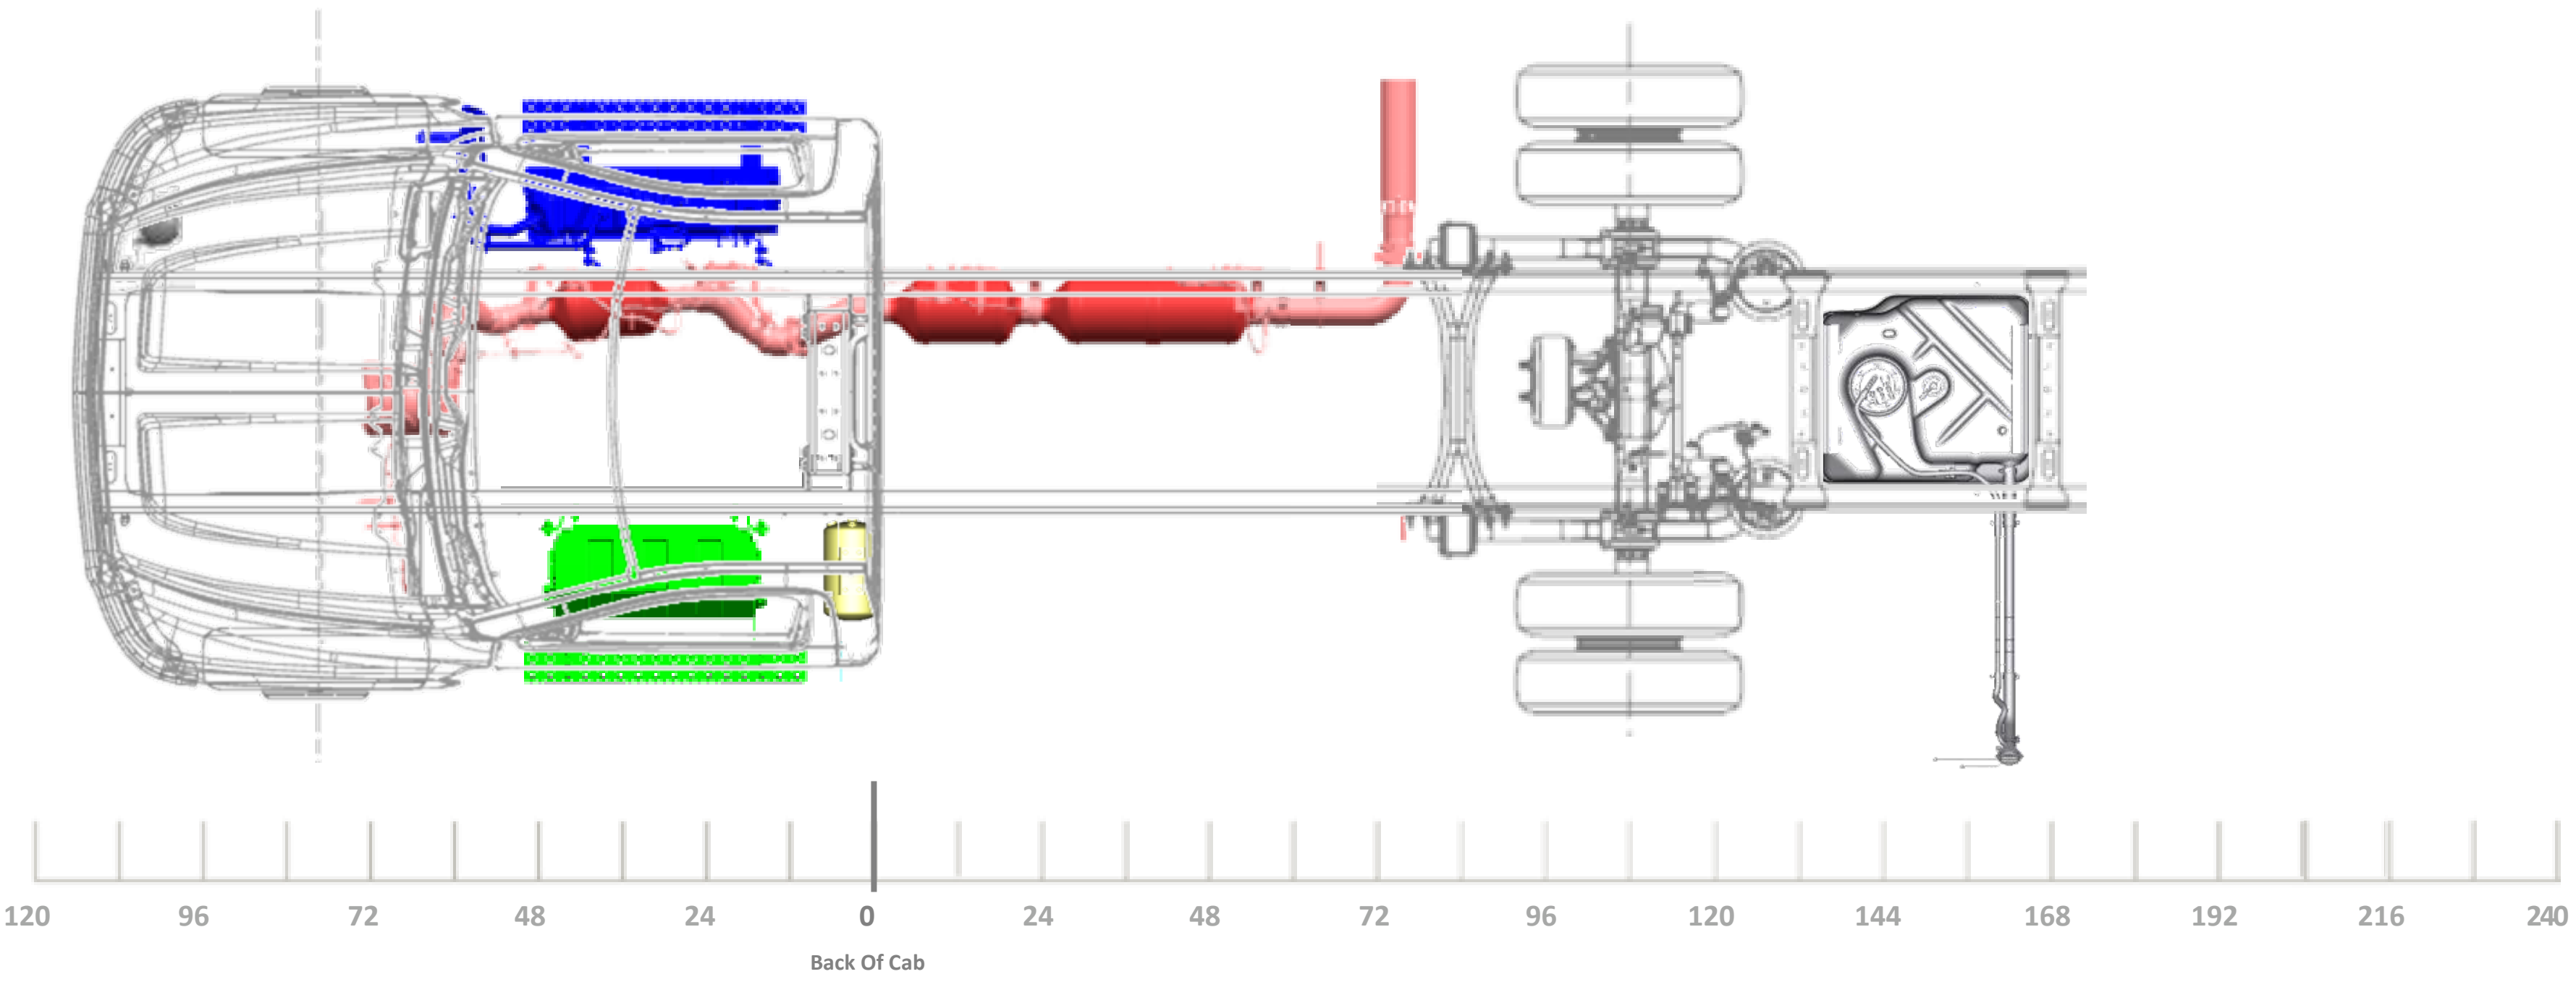

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

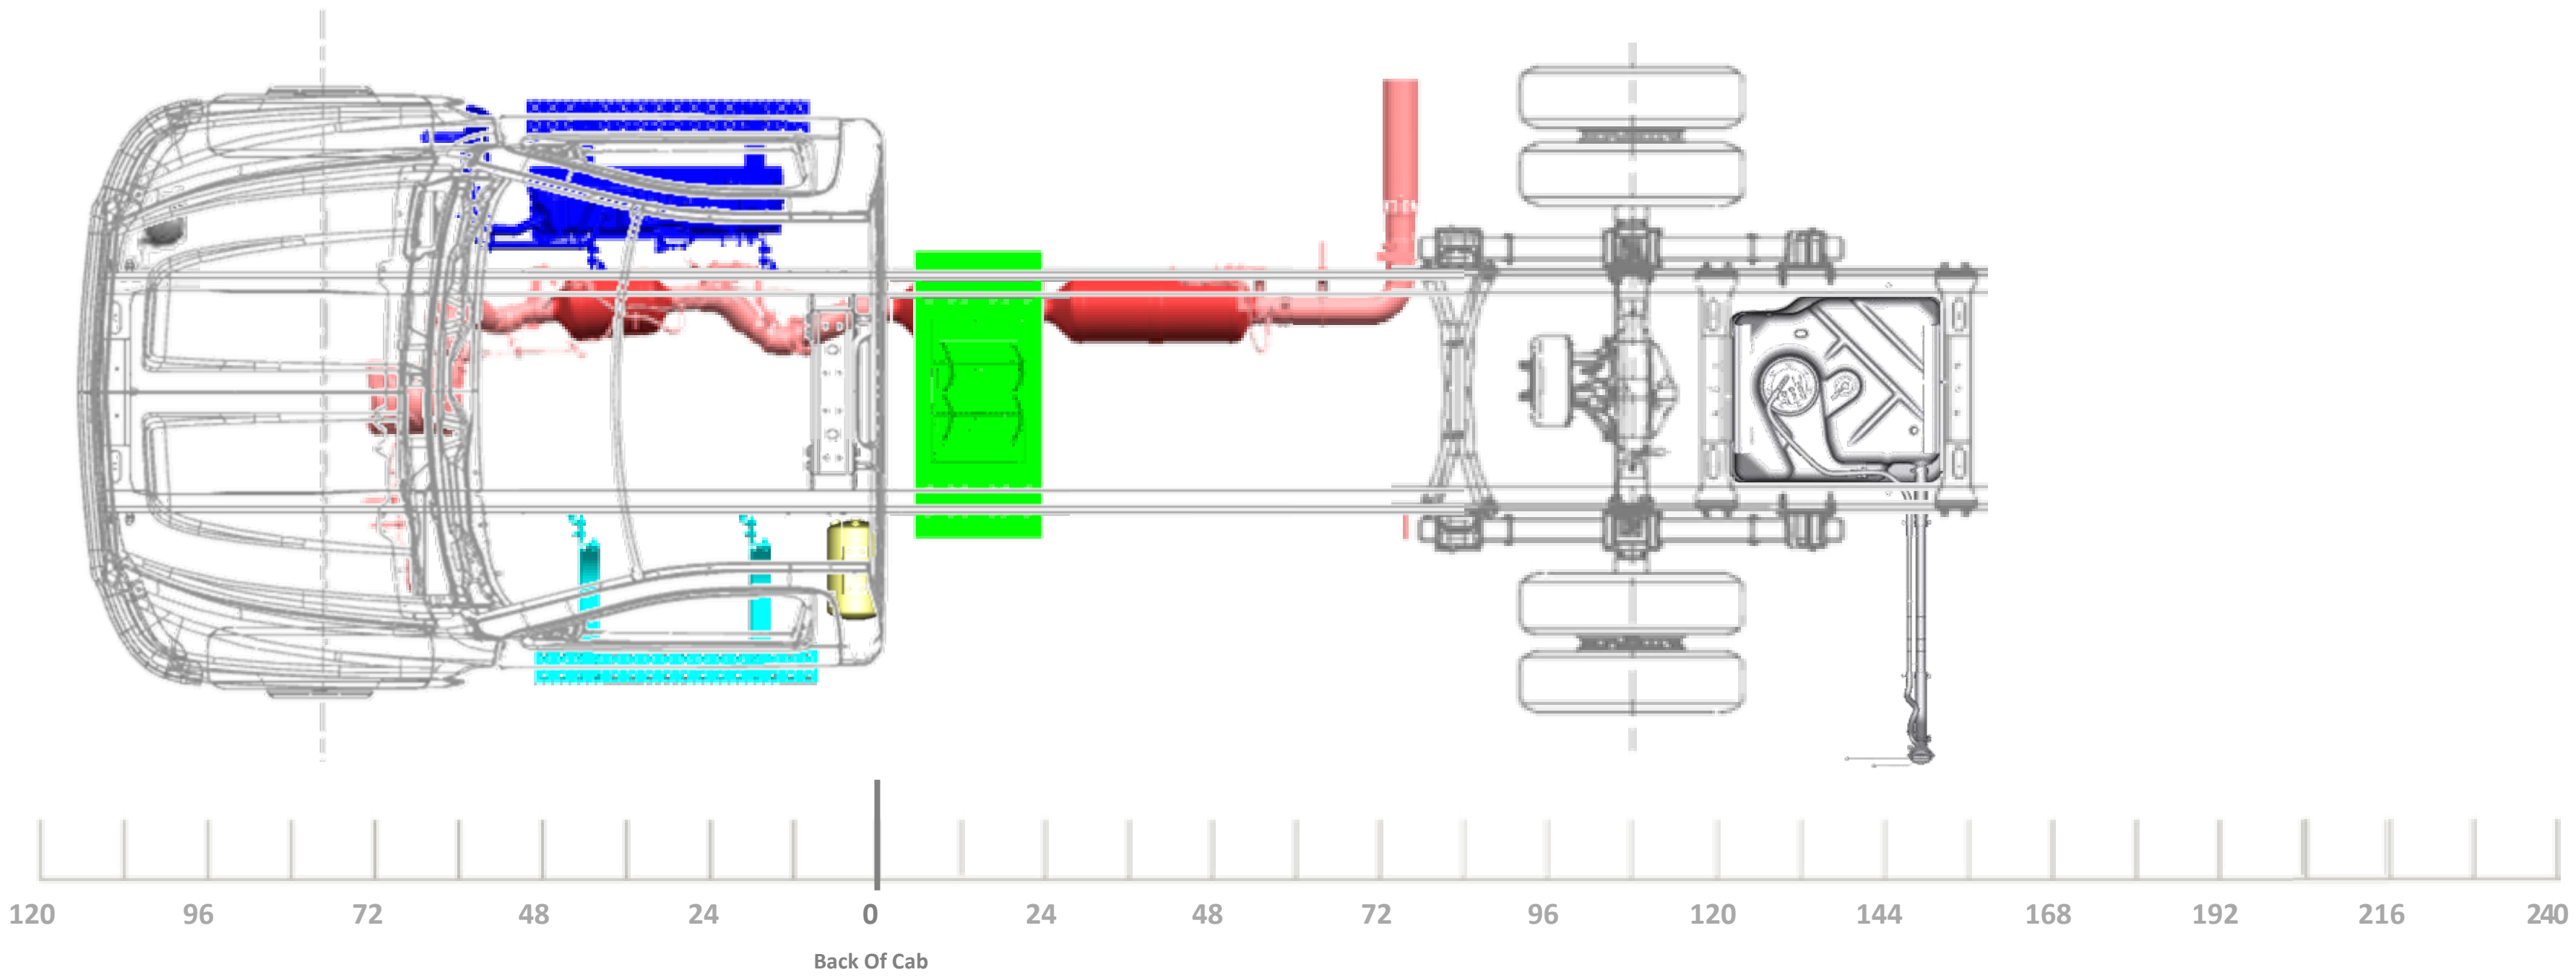
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

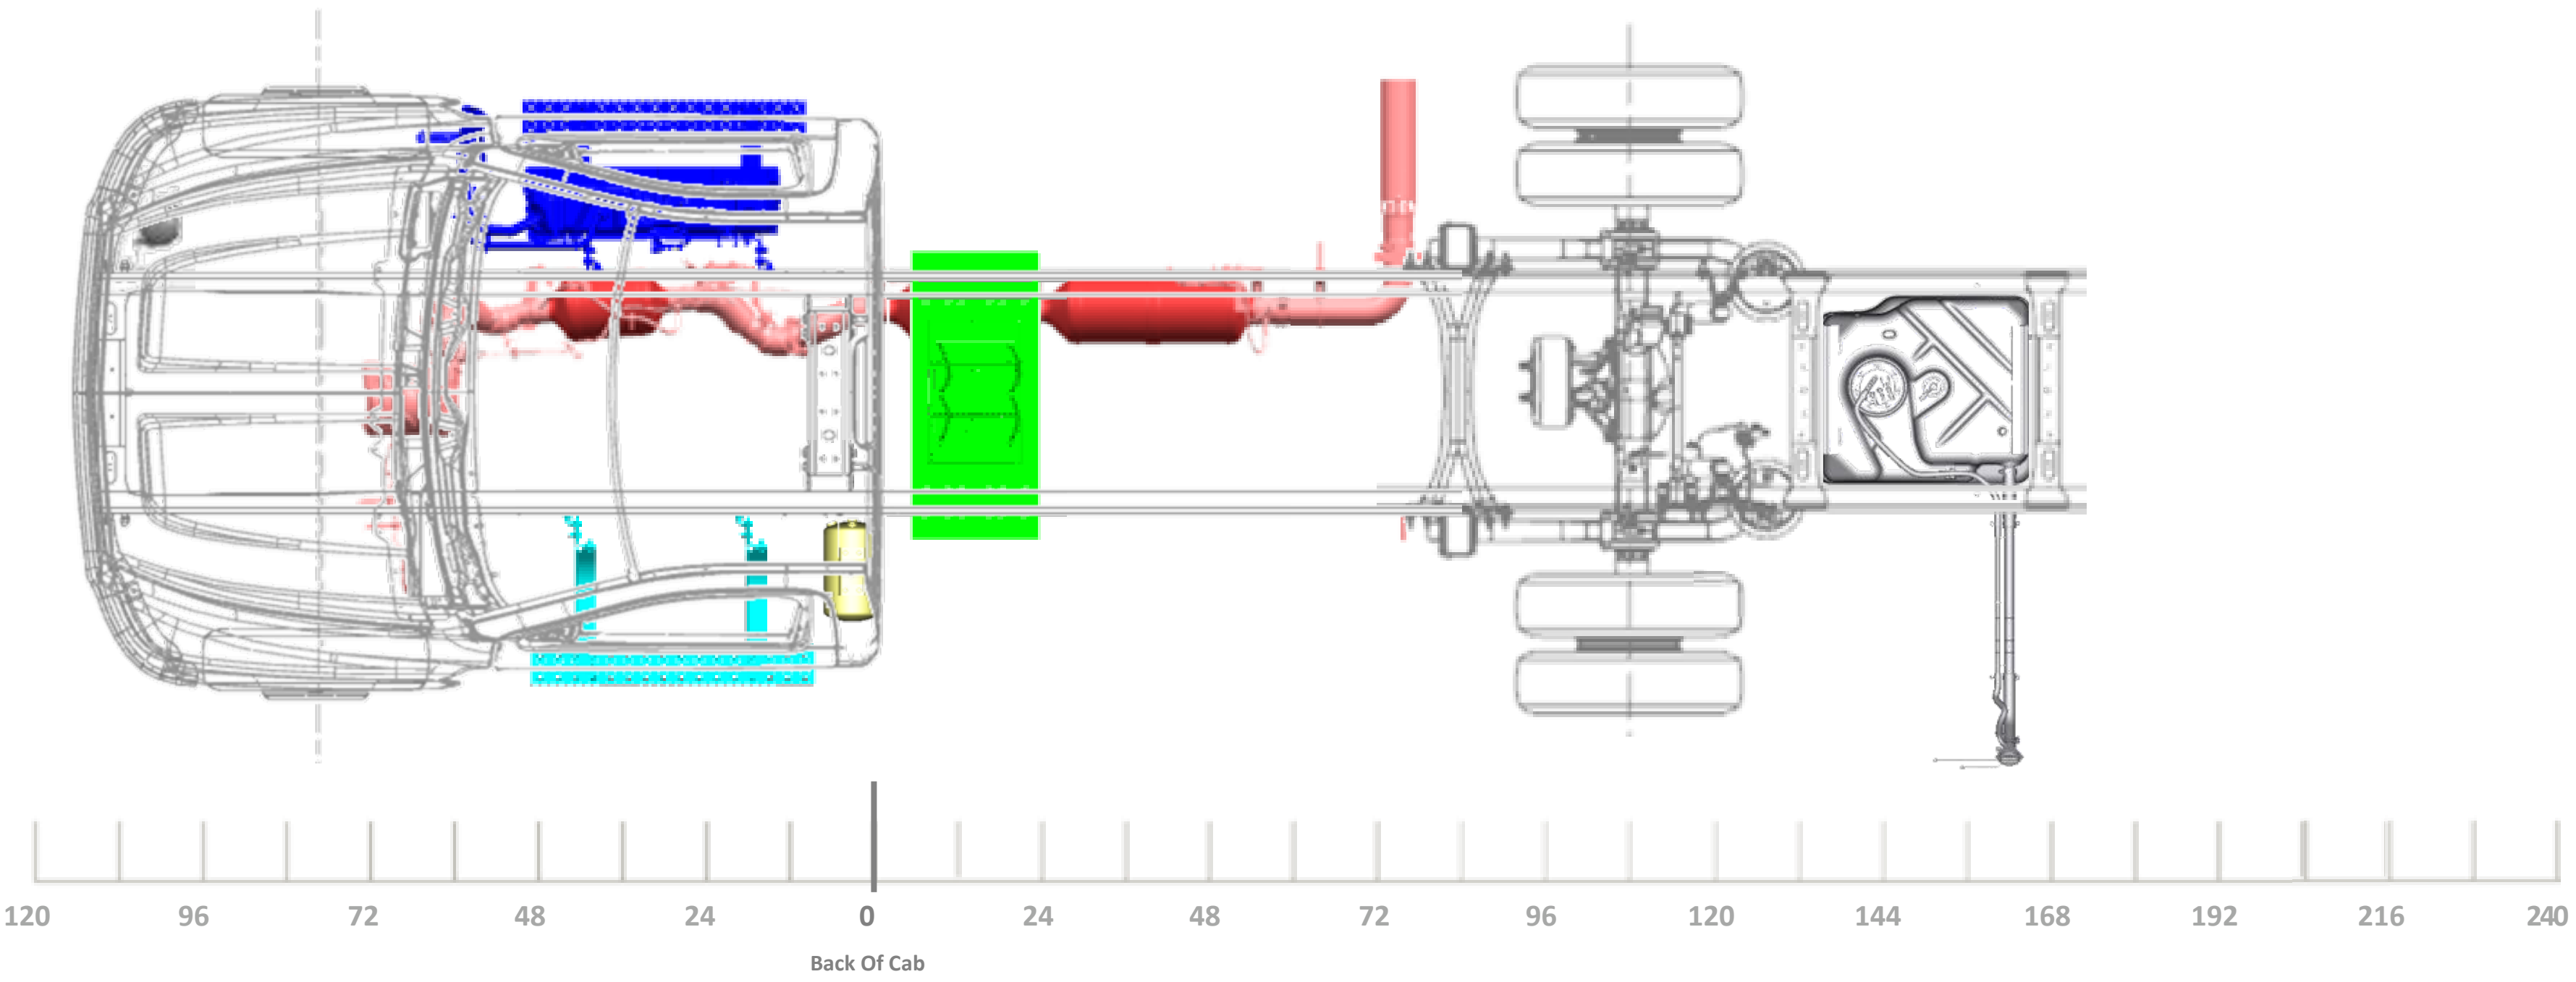
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION VARI-RATE REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA) 49”, 63”, OR 75” AF

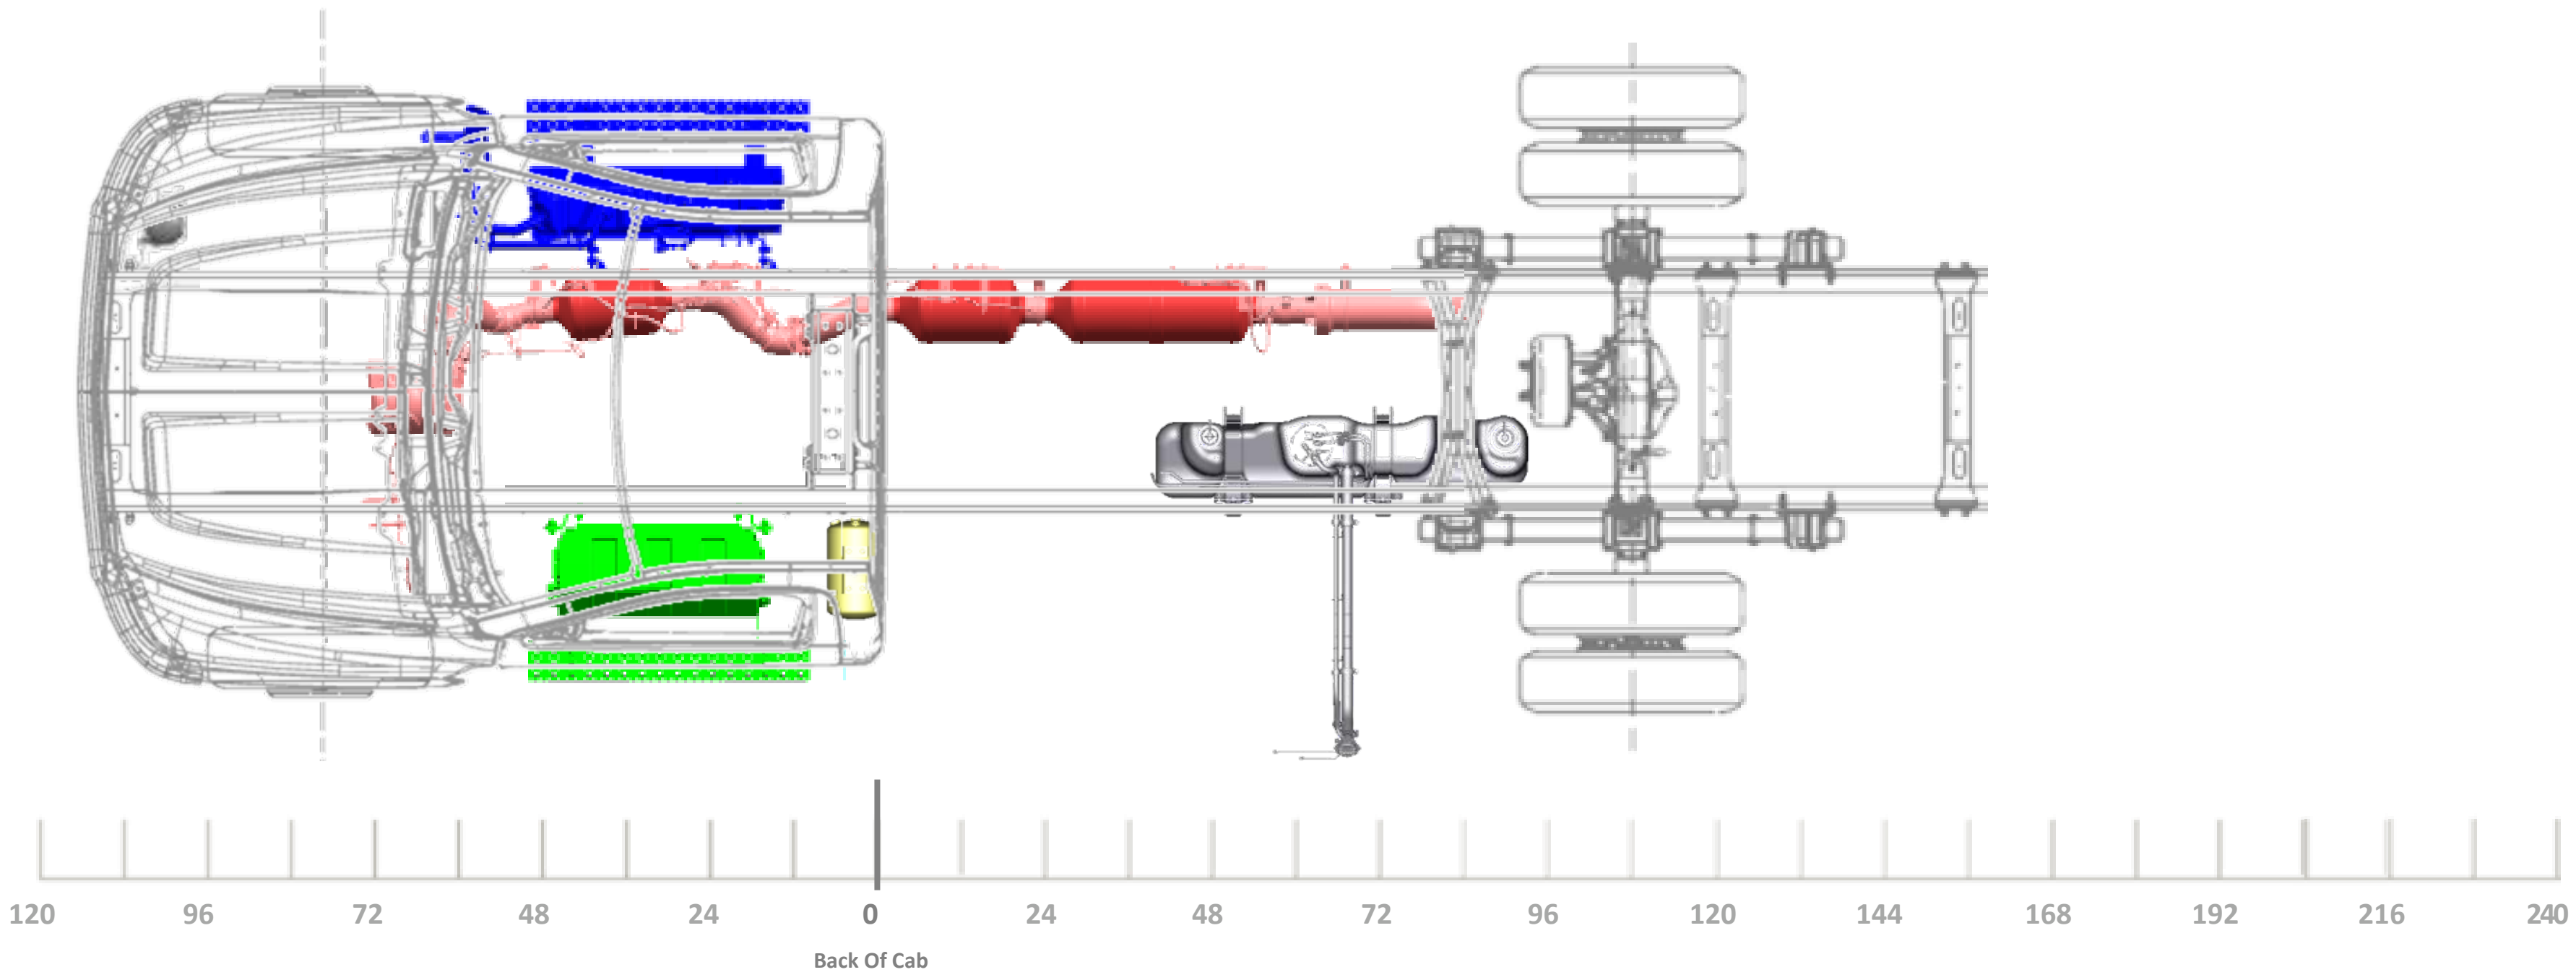
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

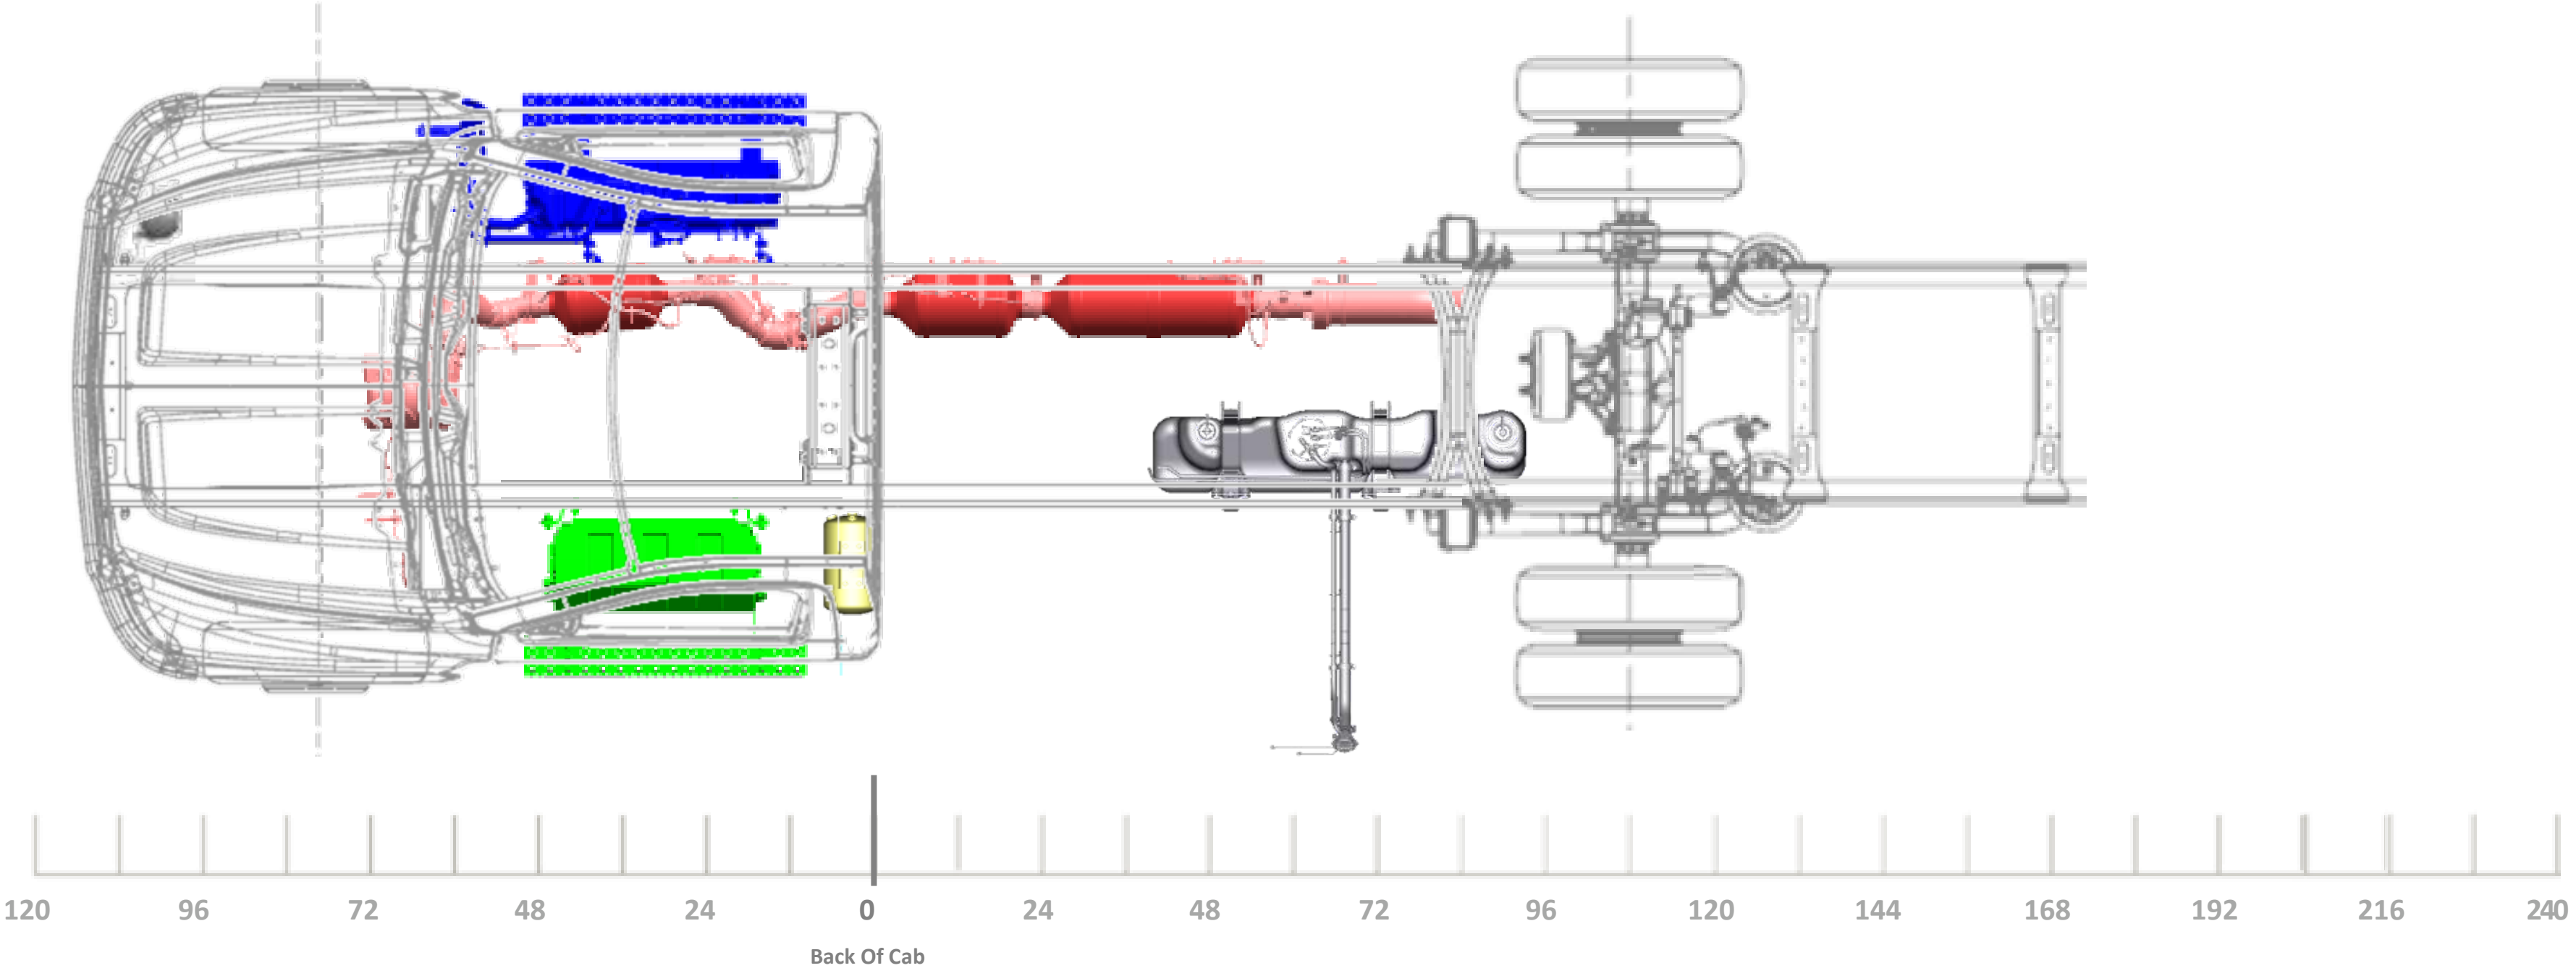
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

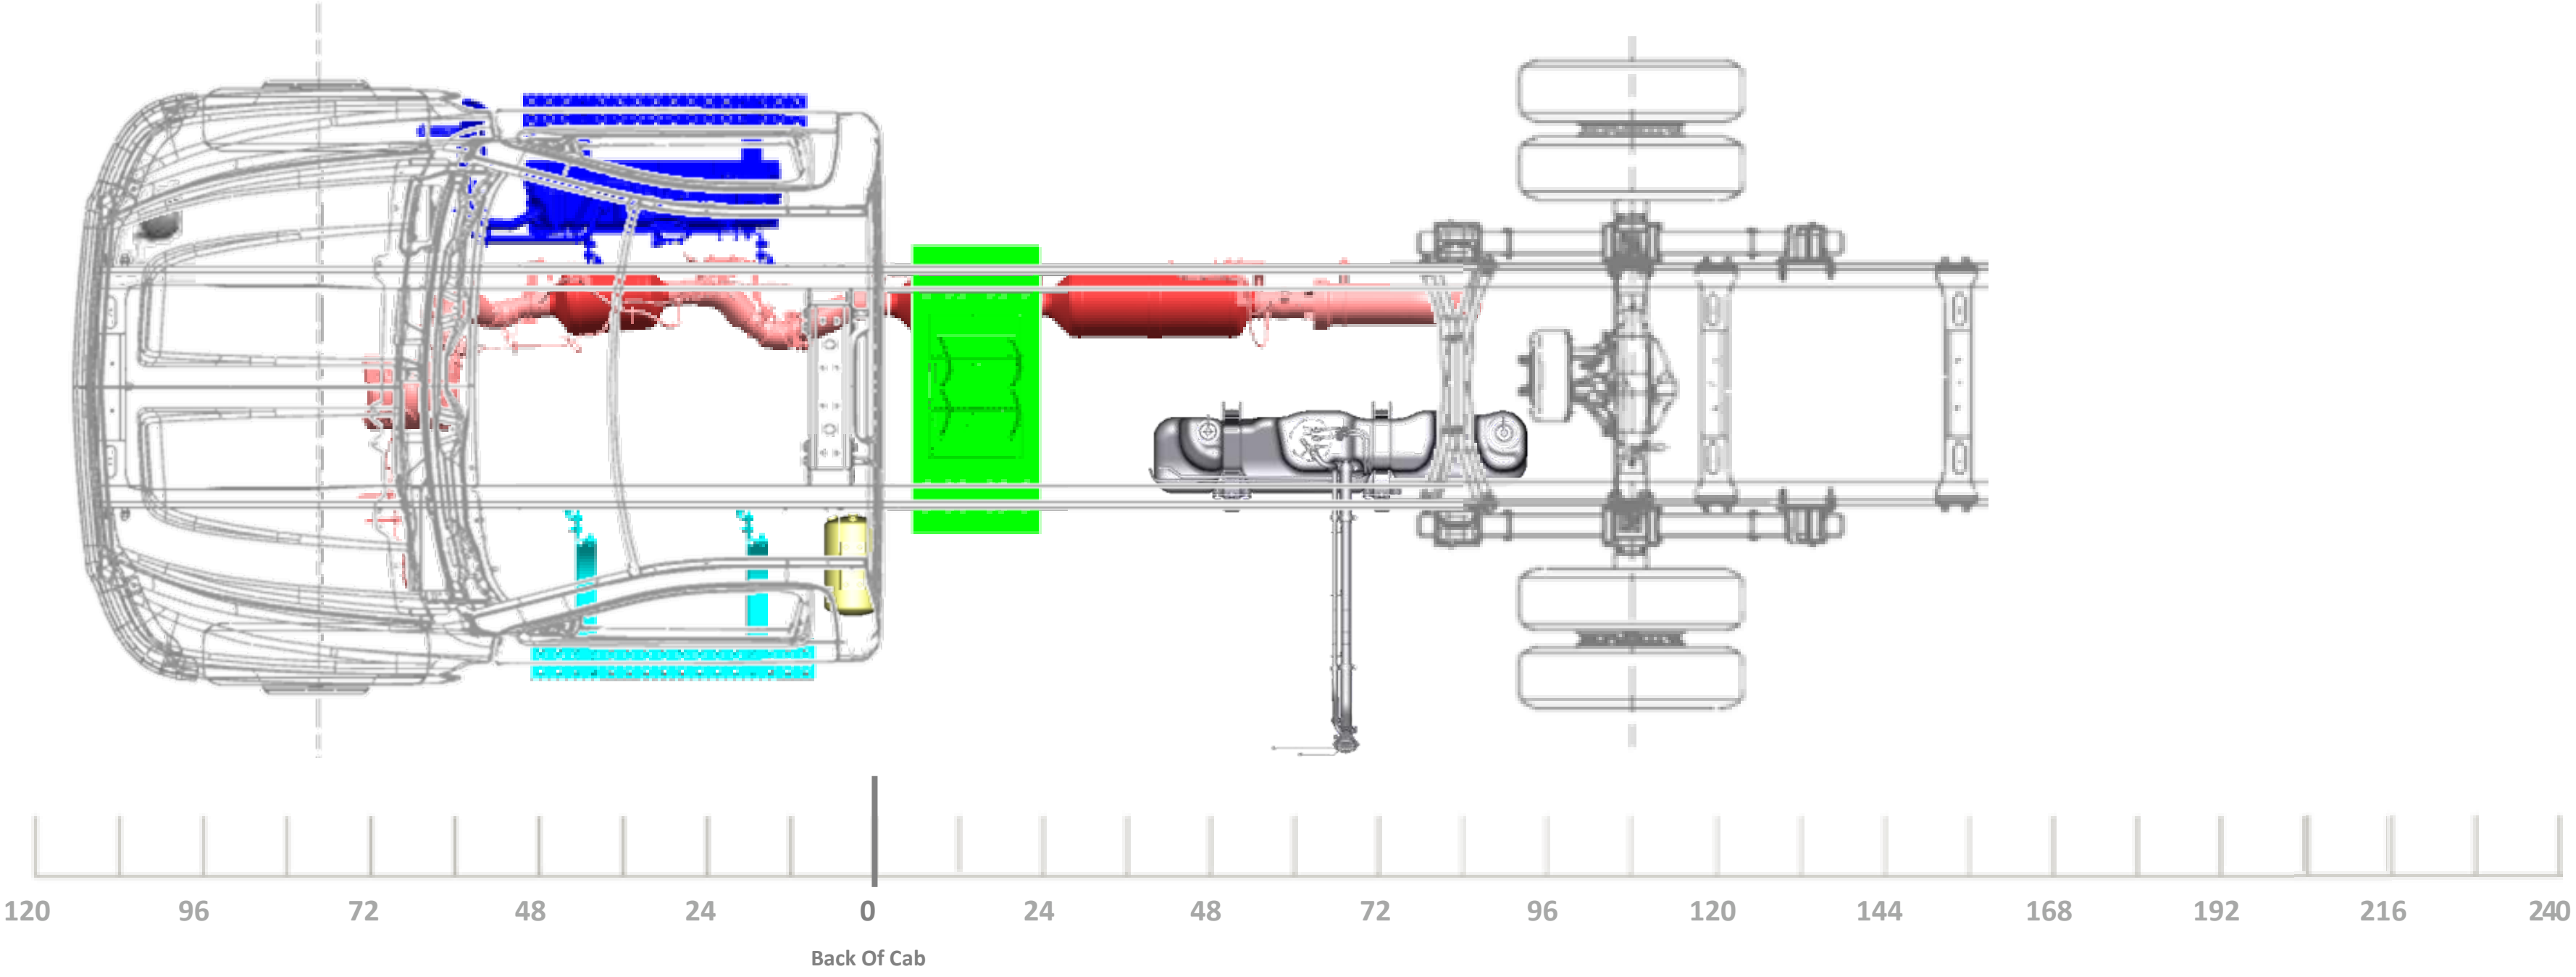

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

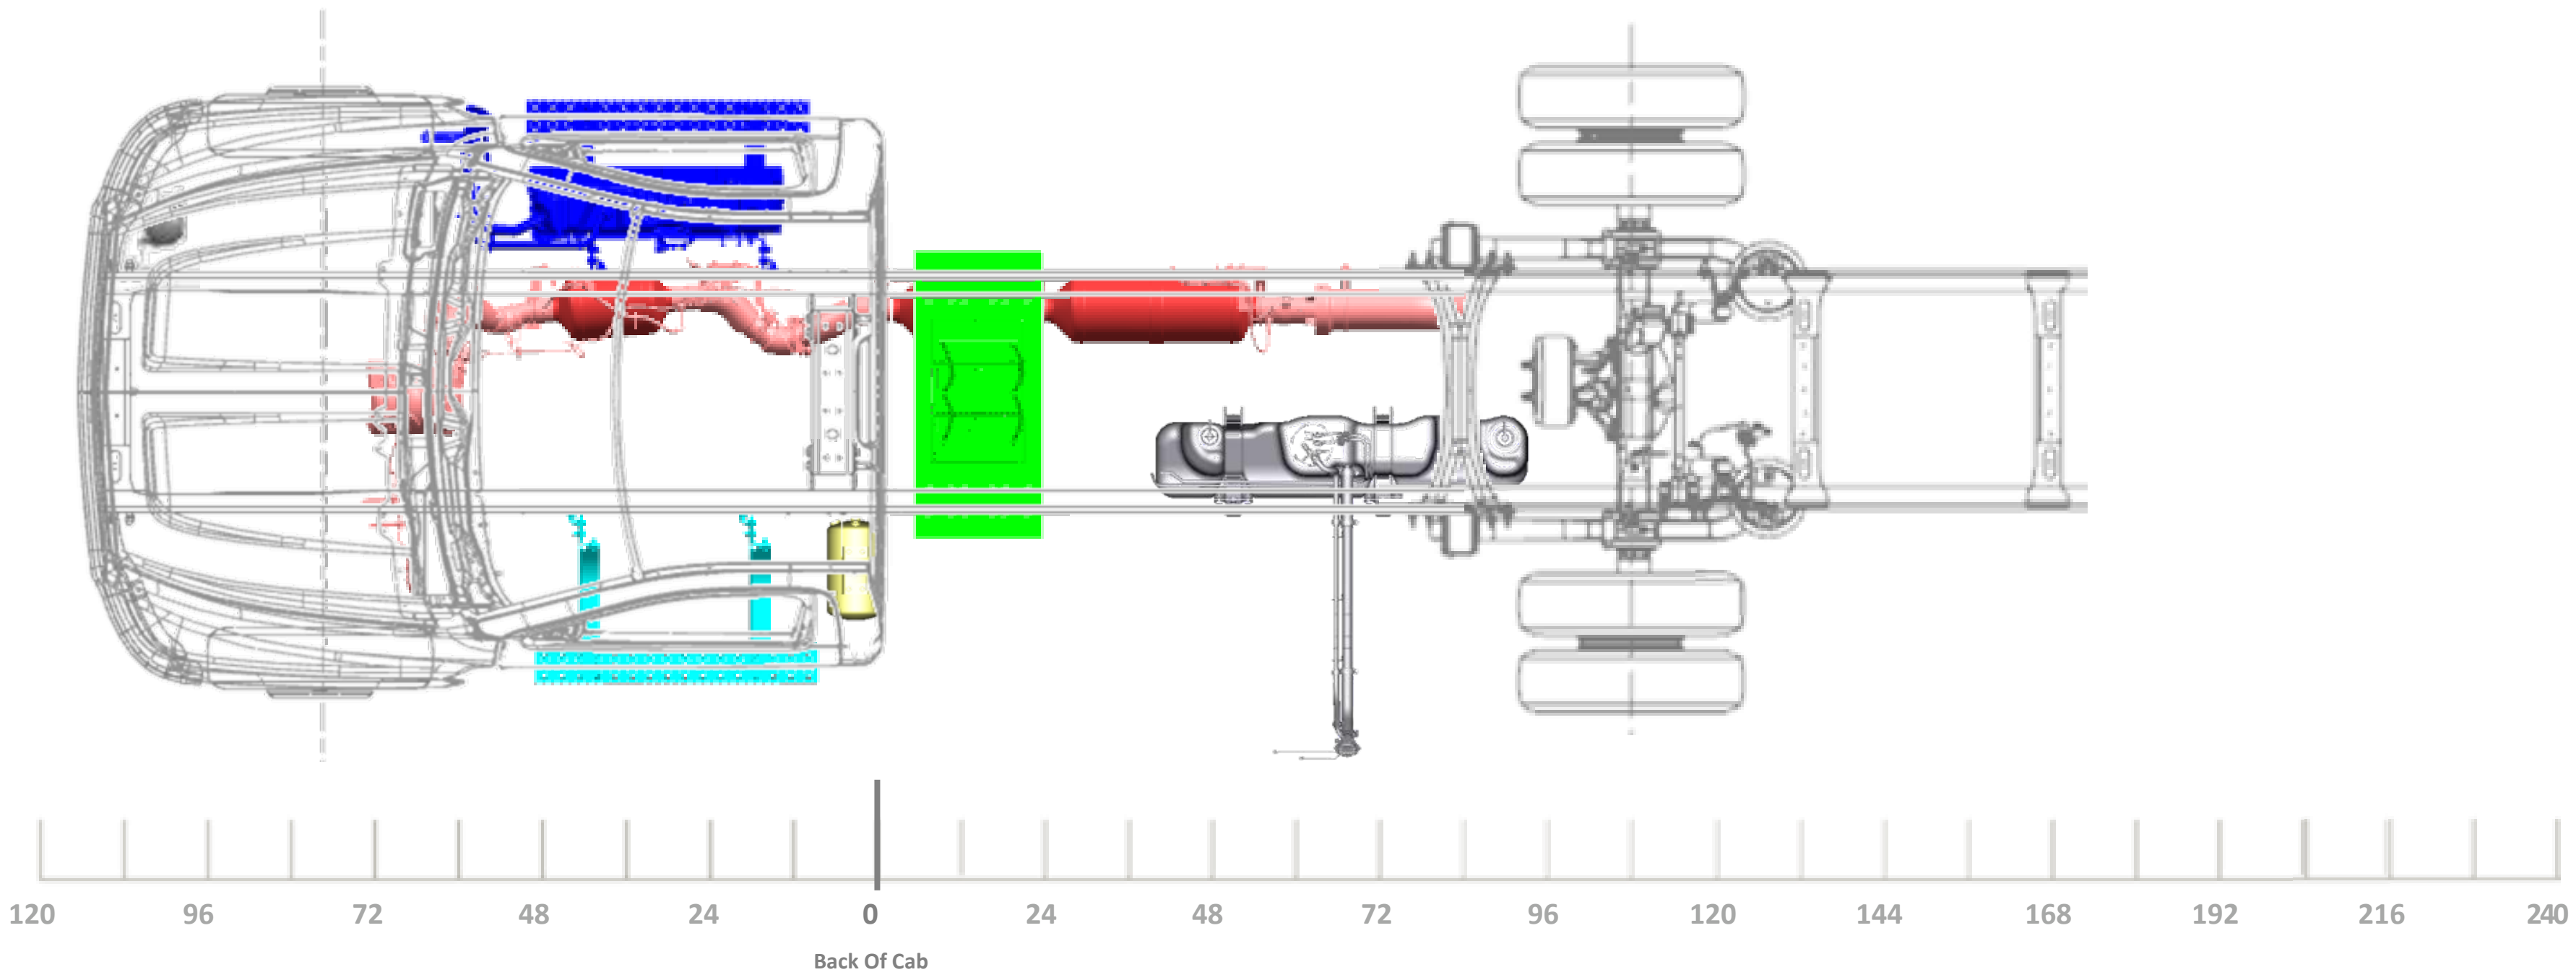

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

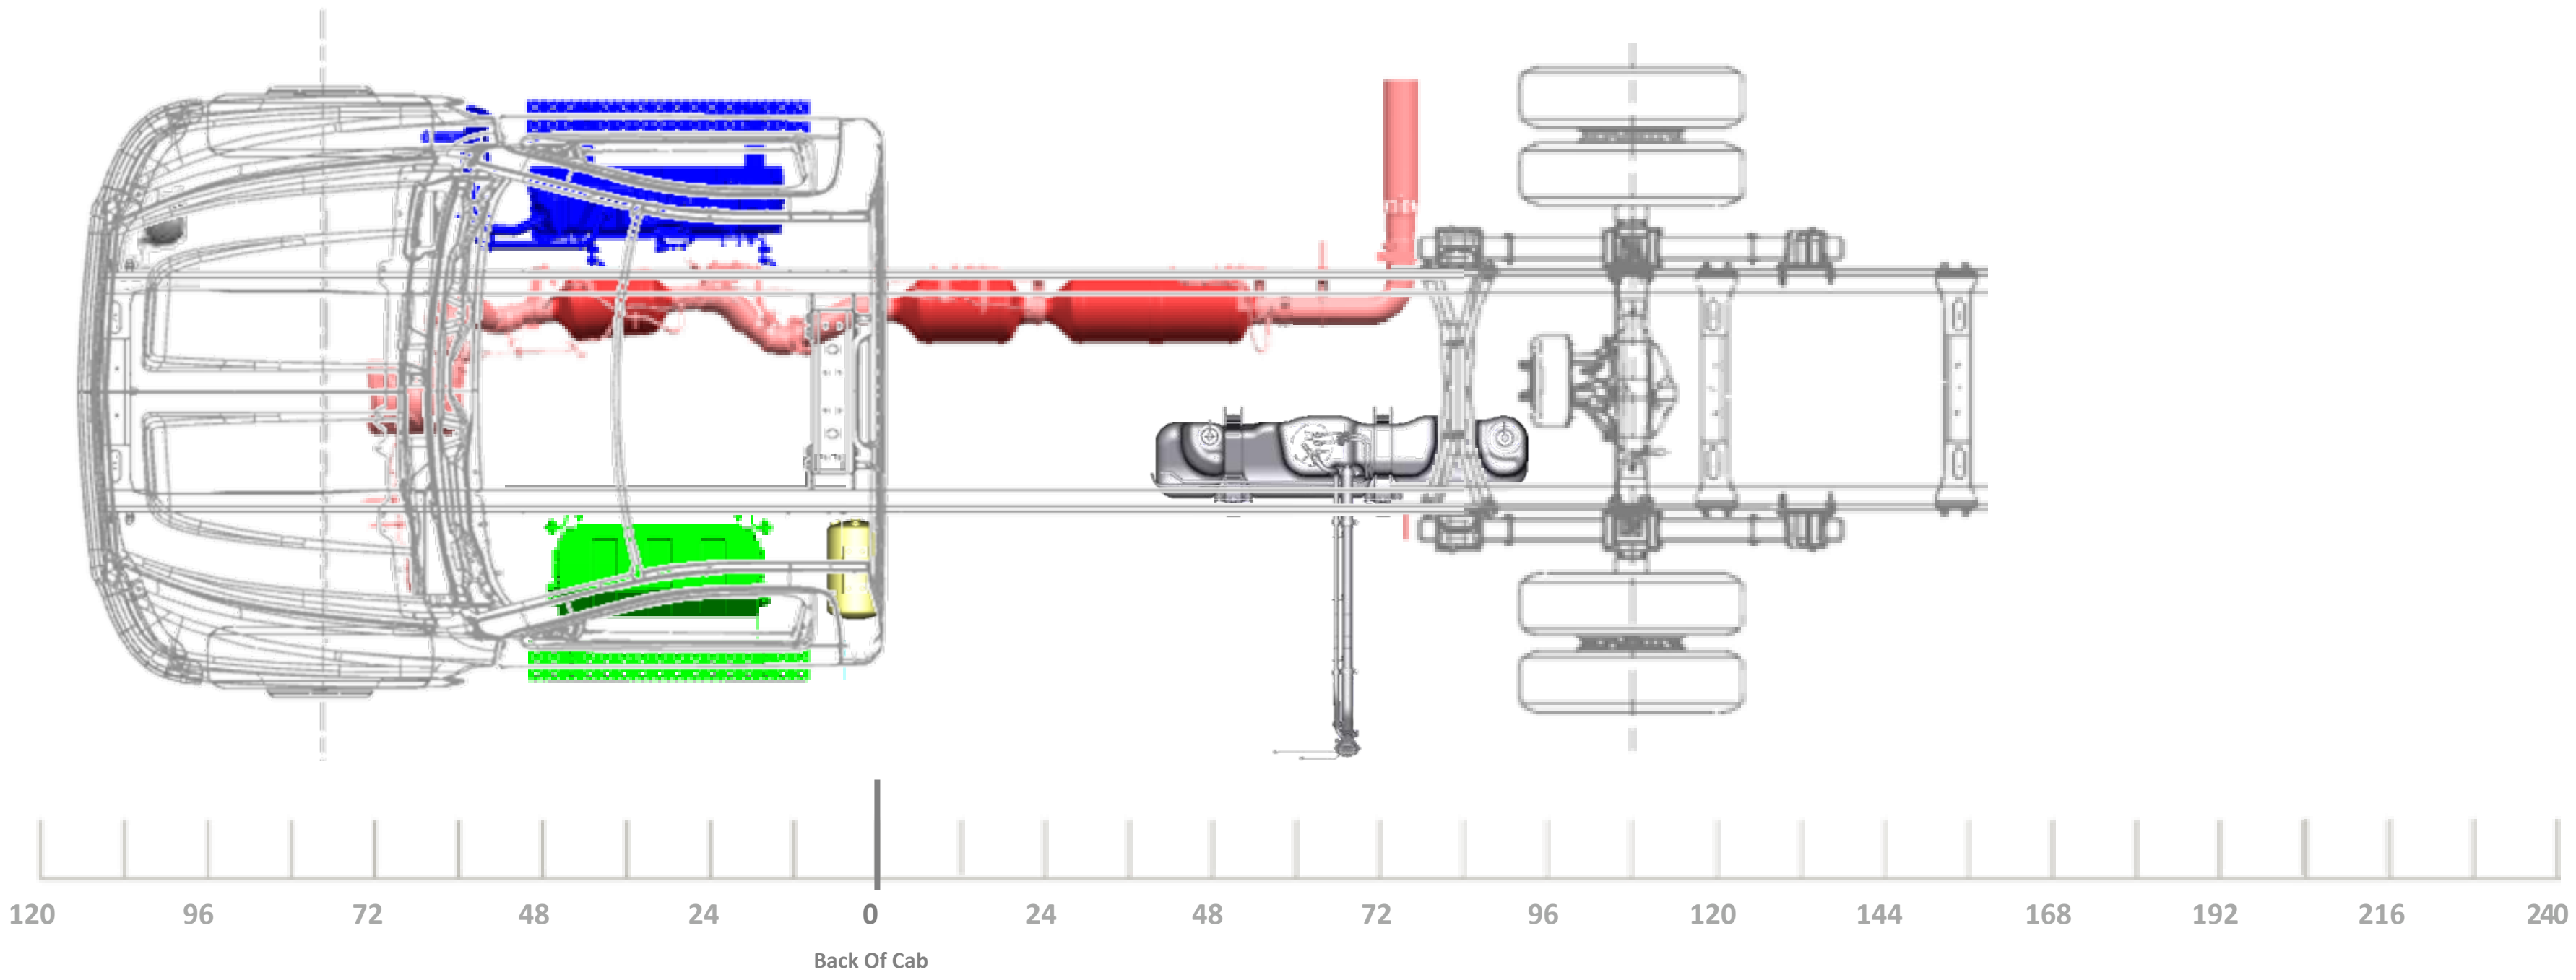
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

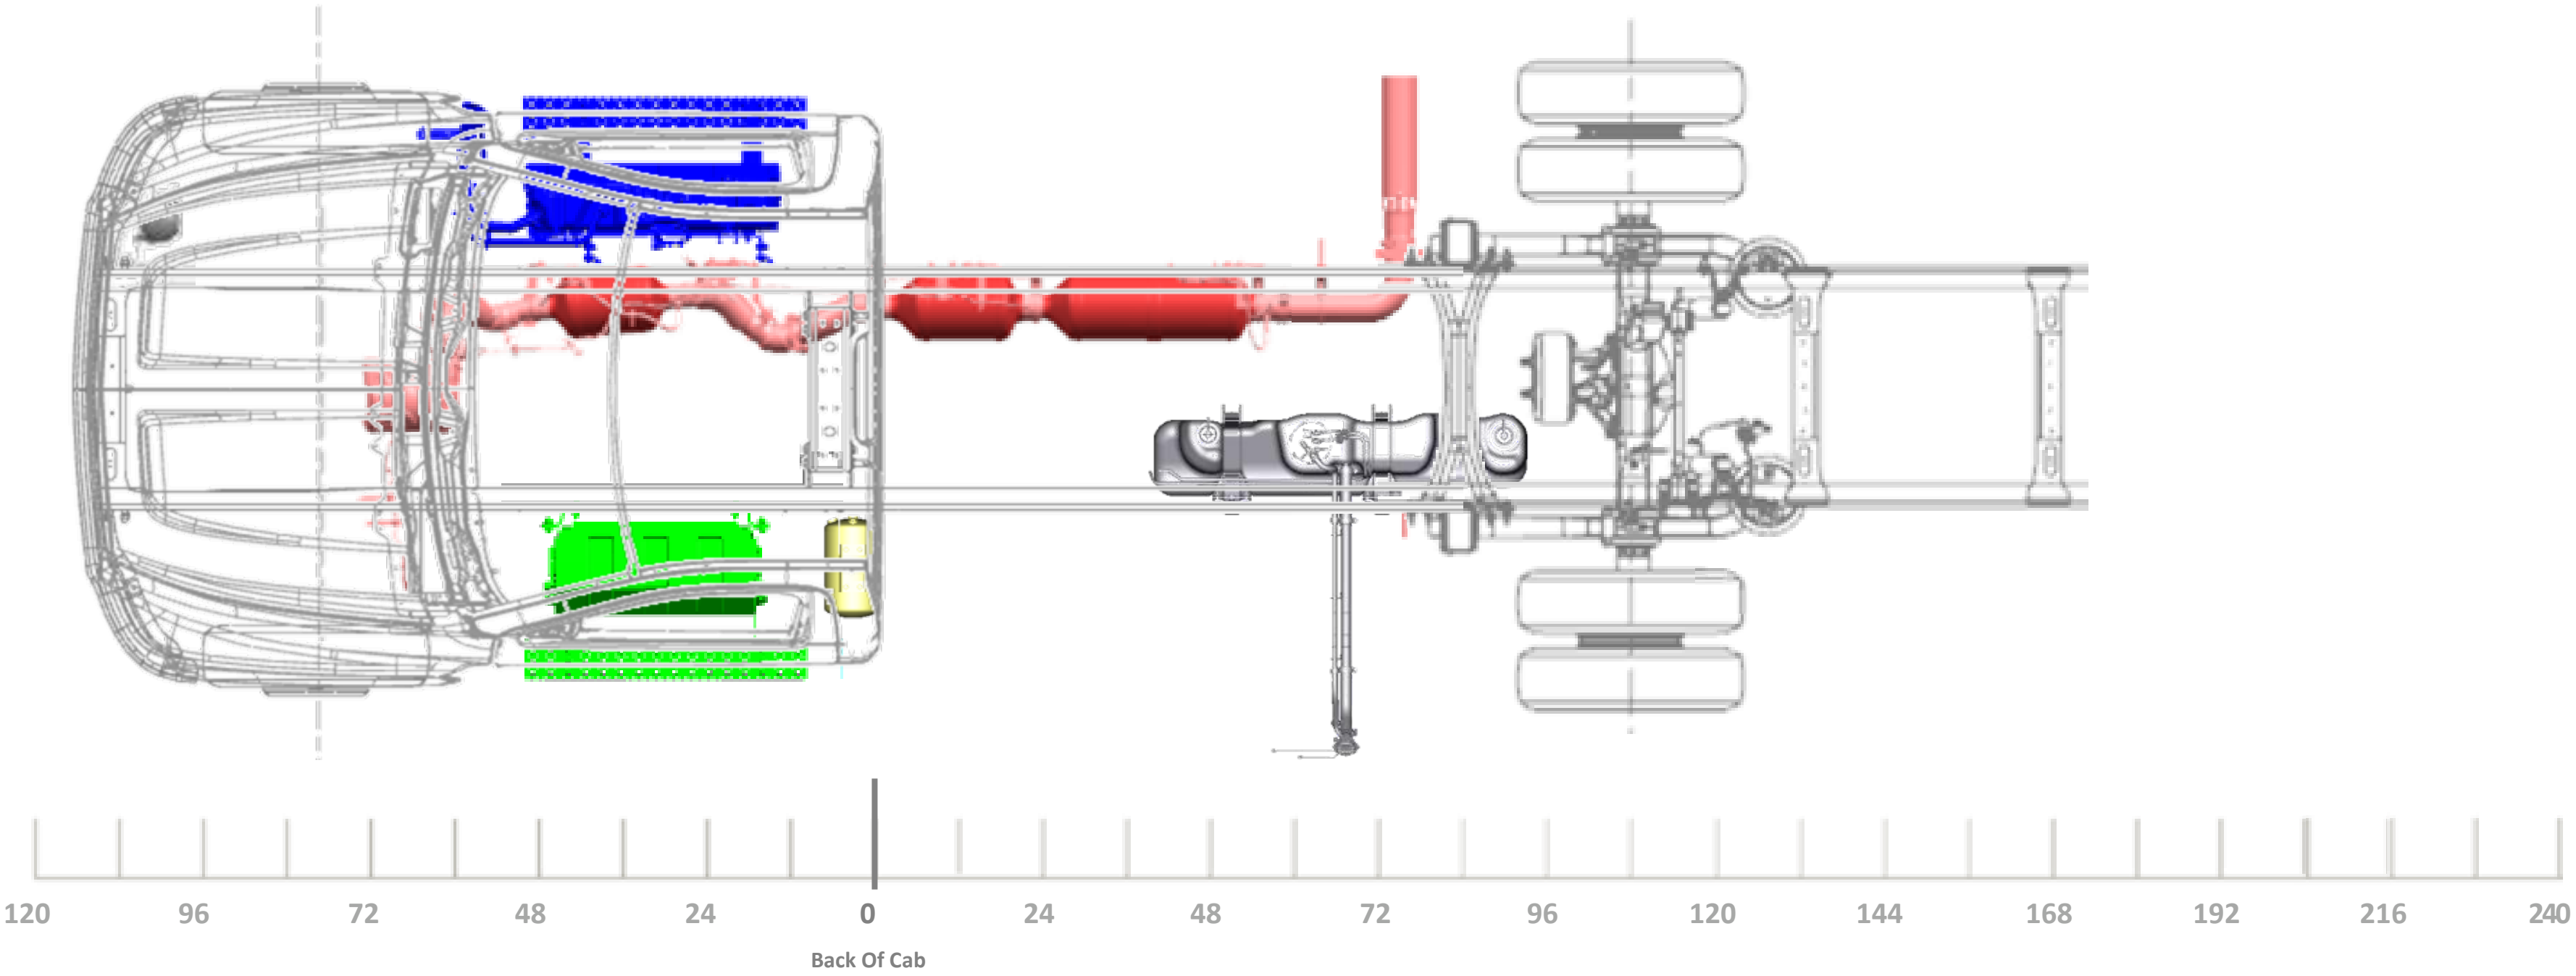
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

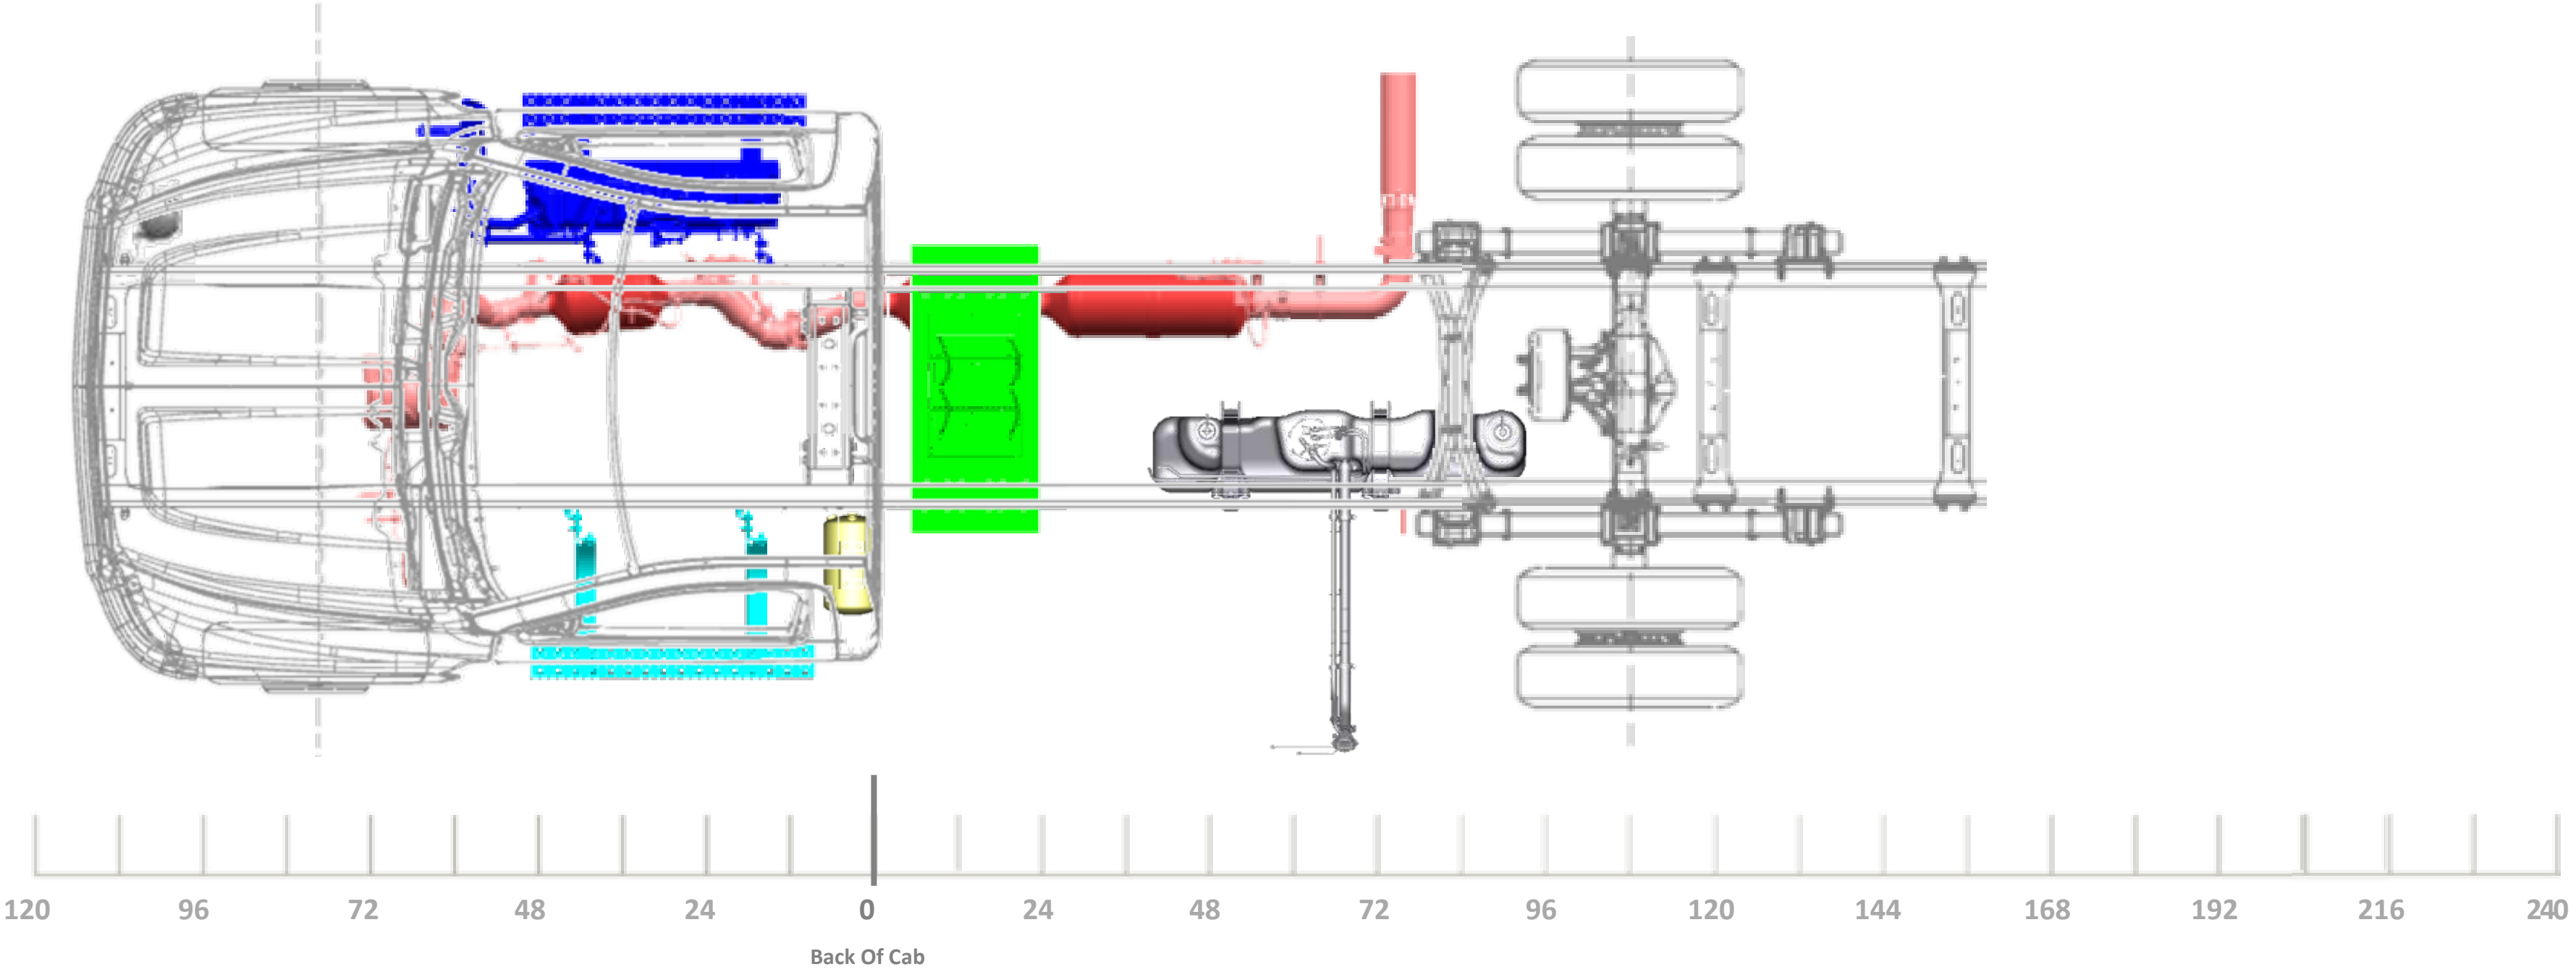
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

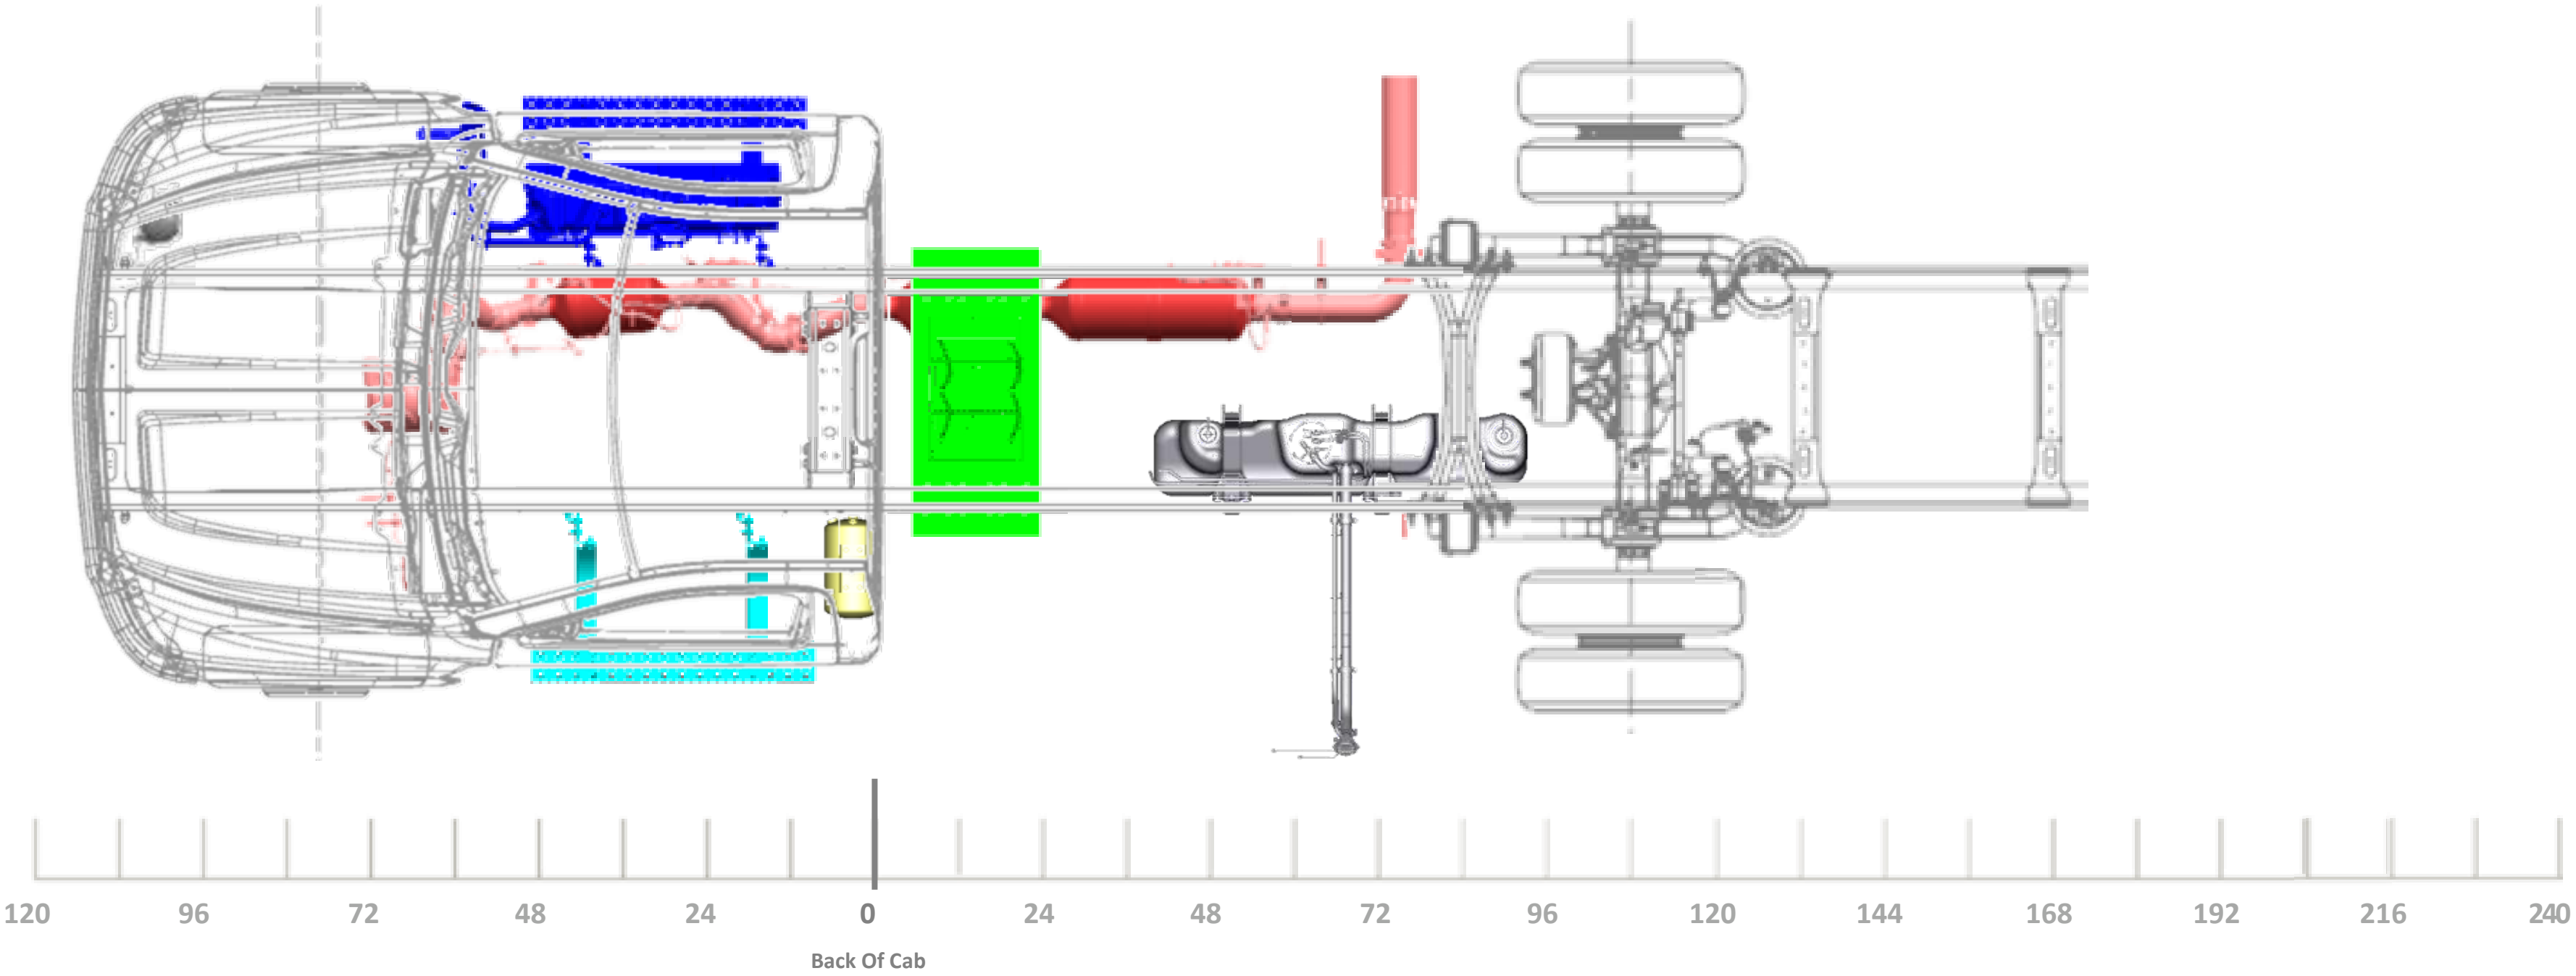

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

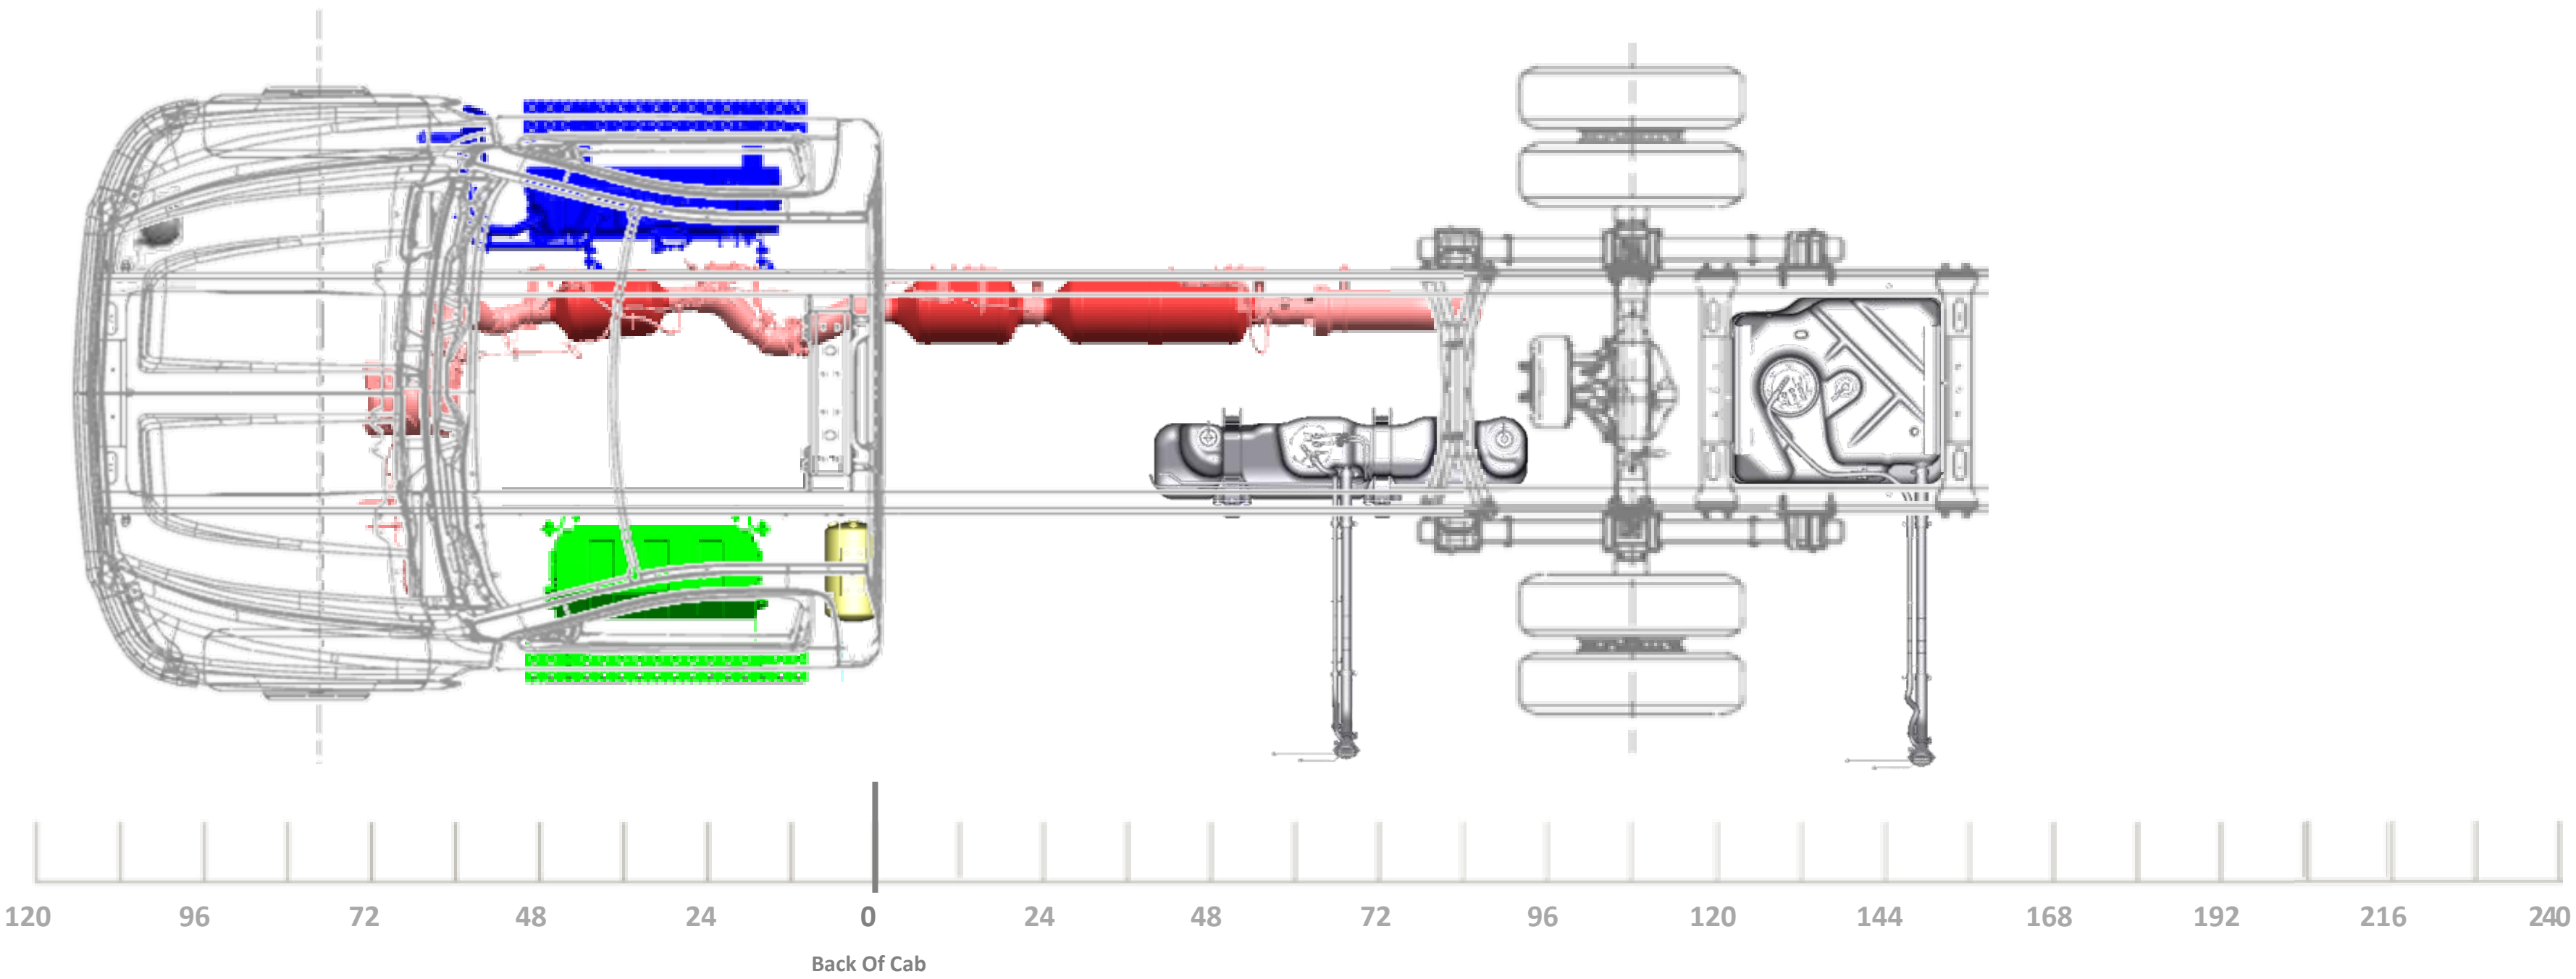
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

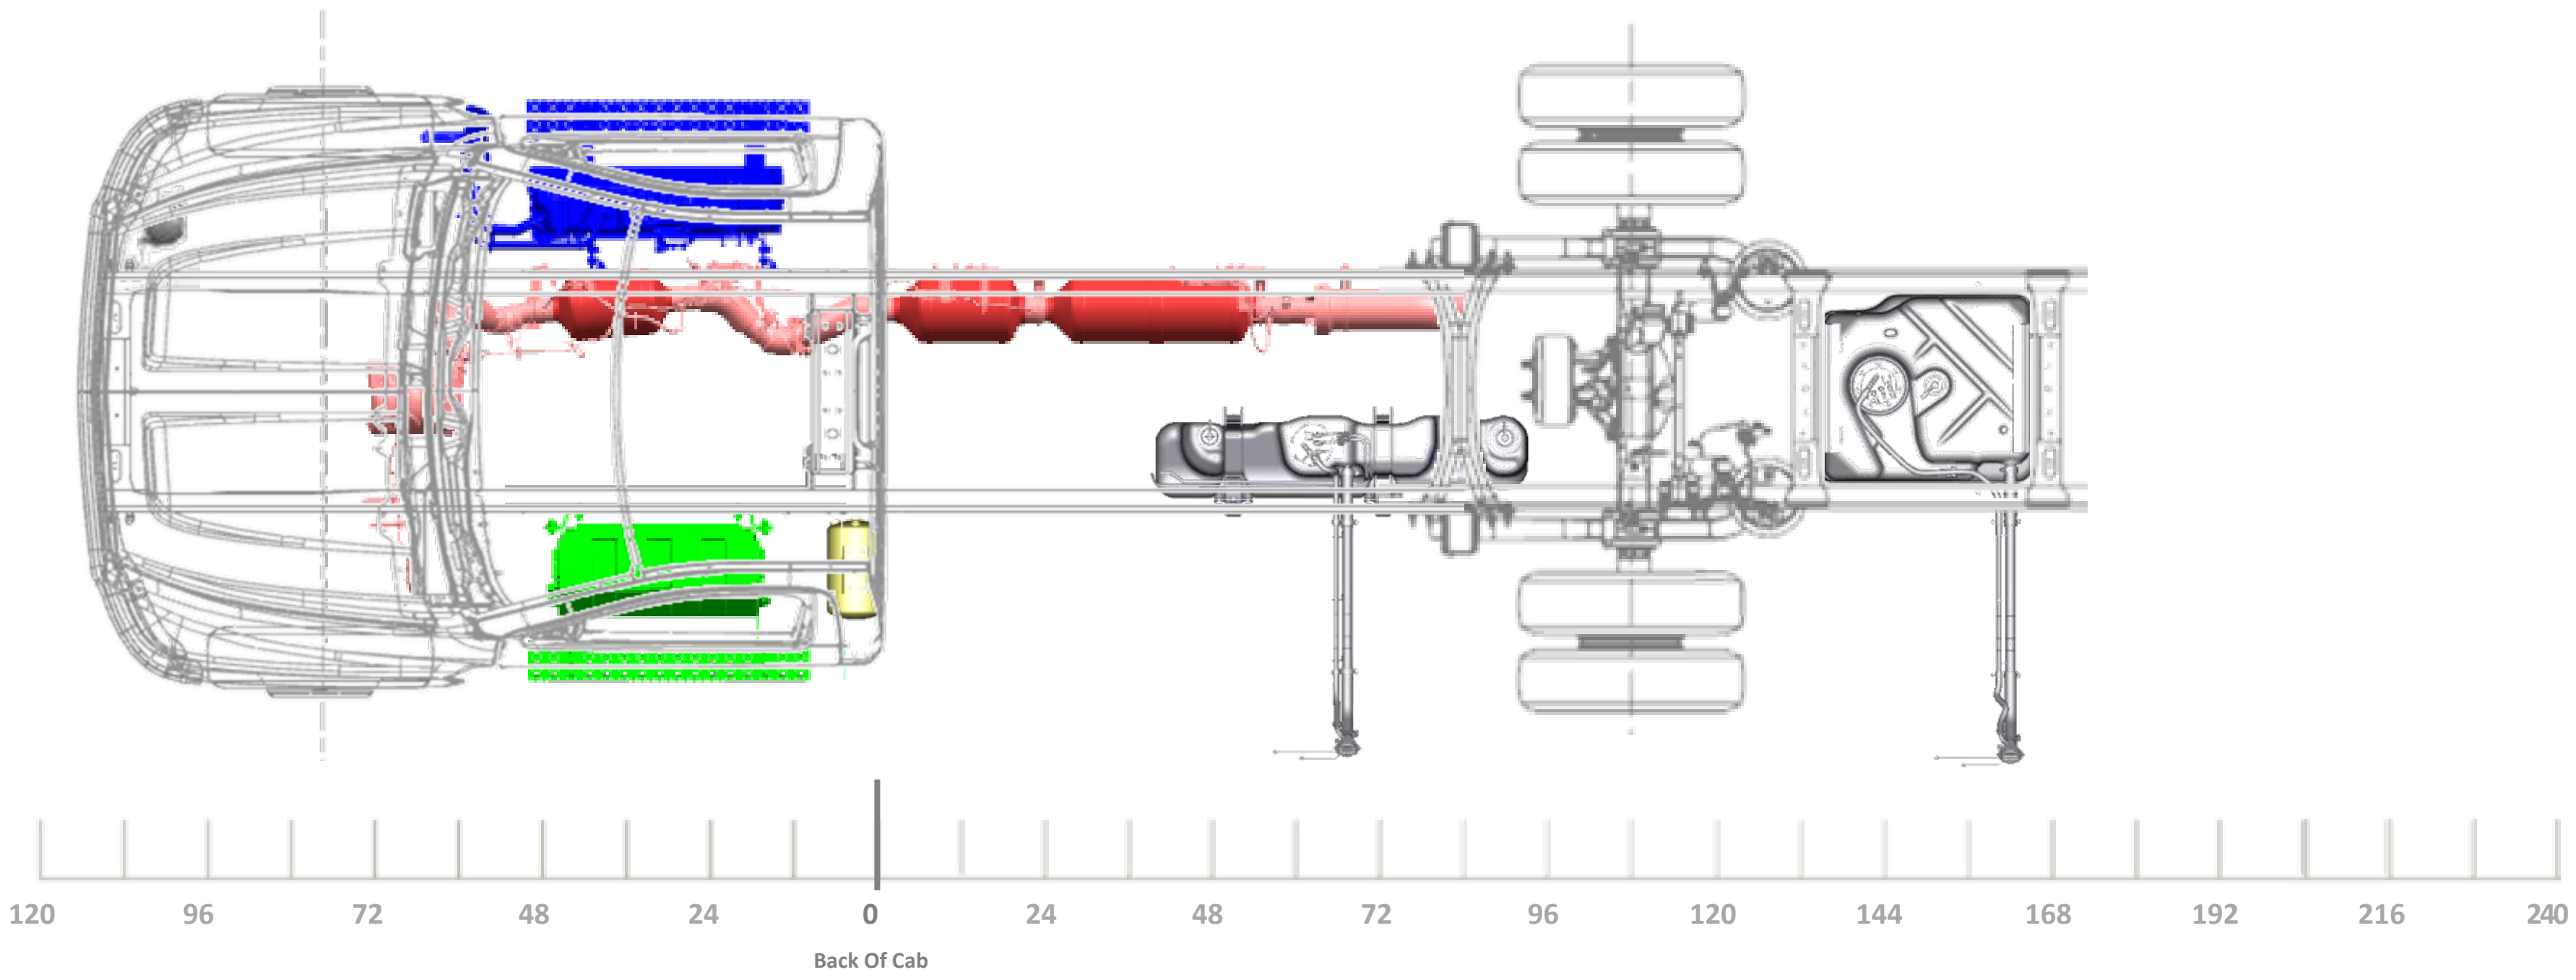
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

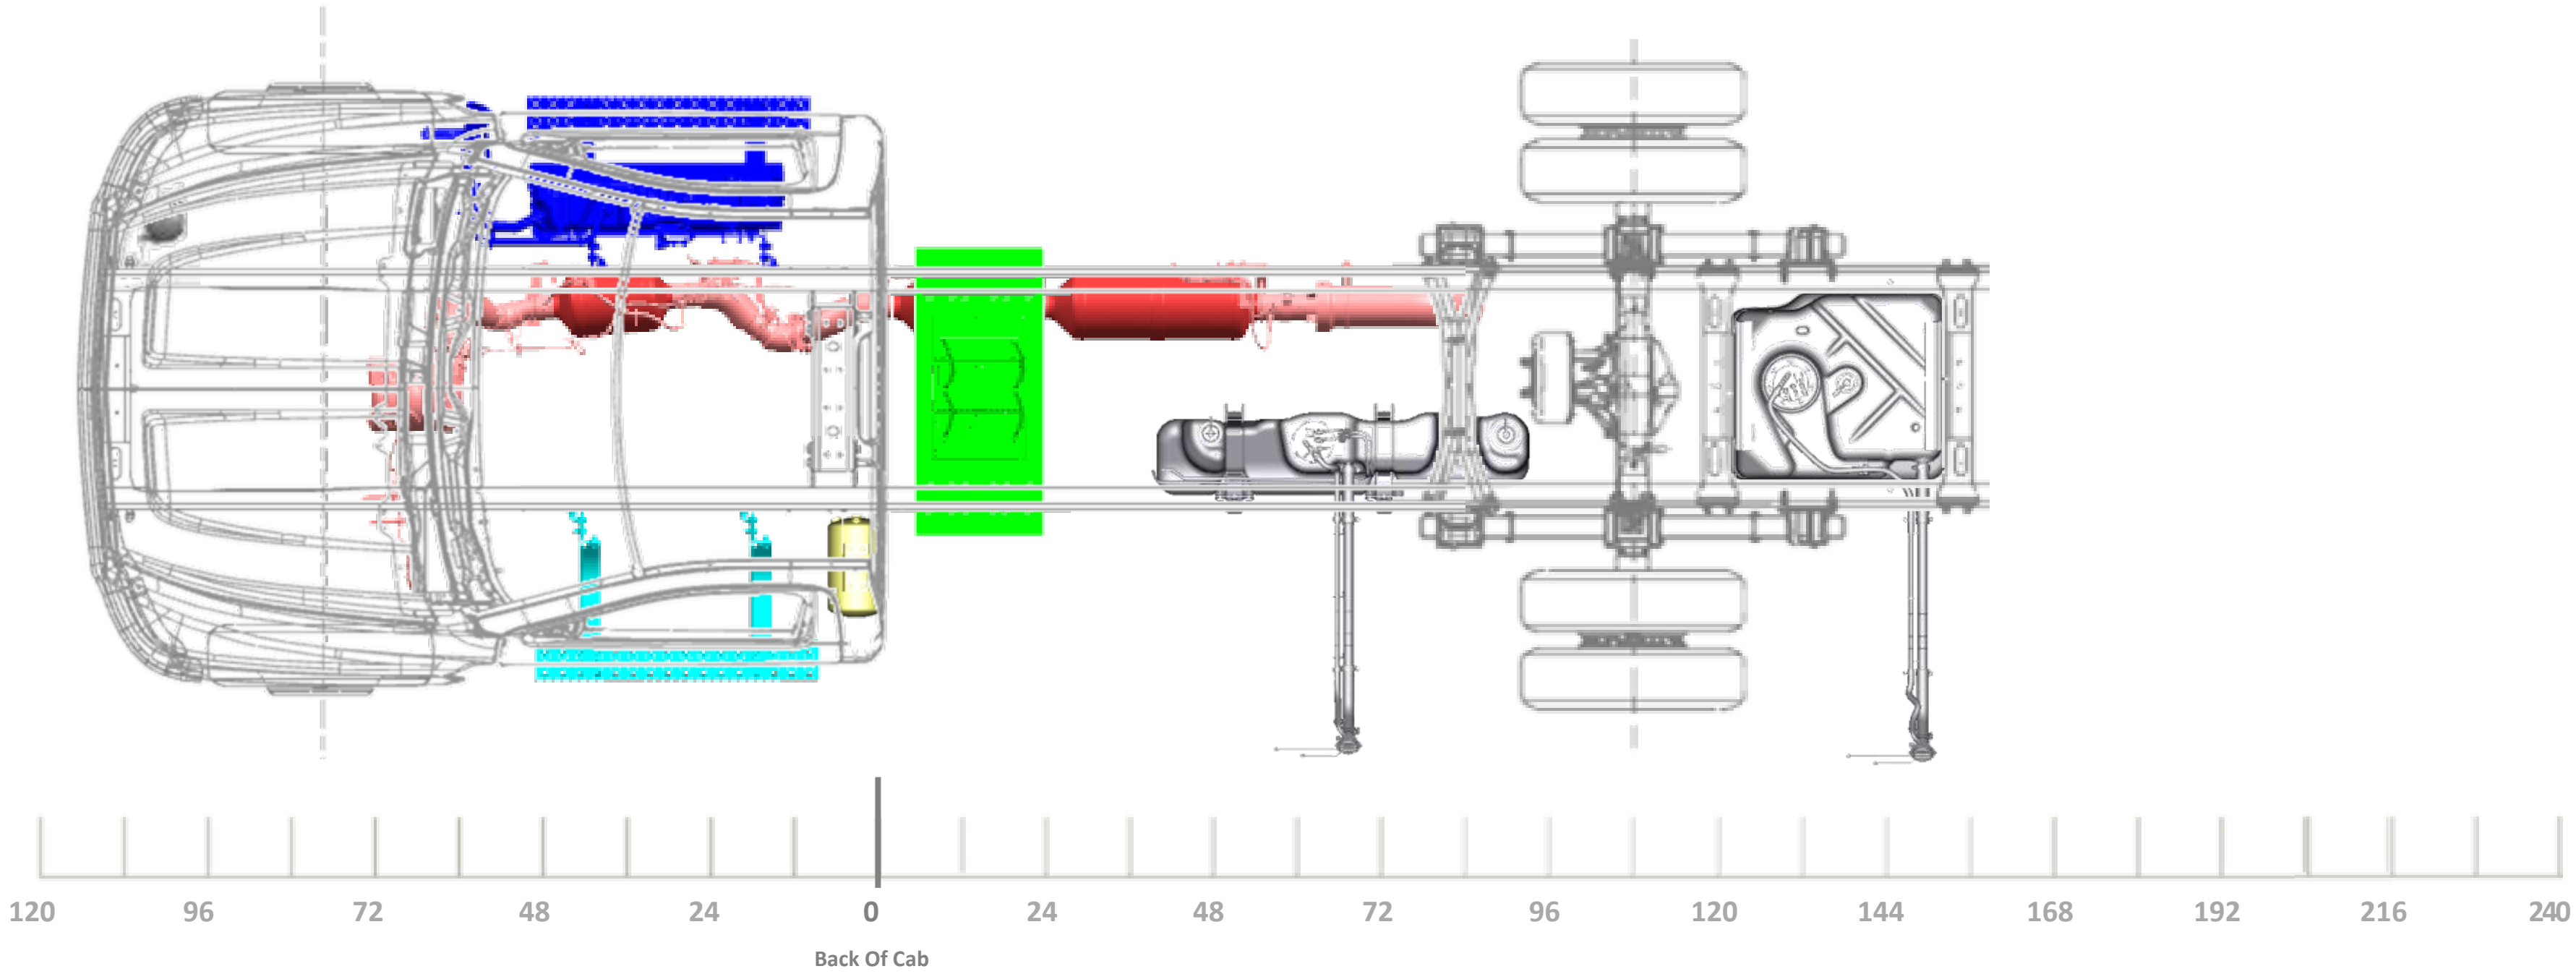
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

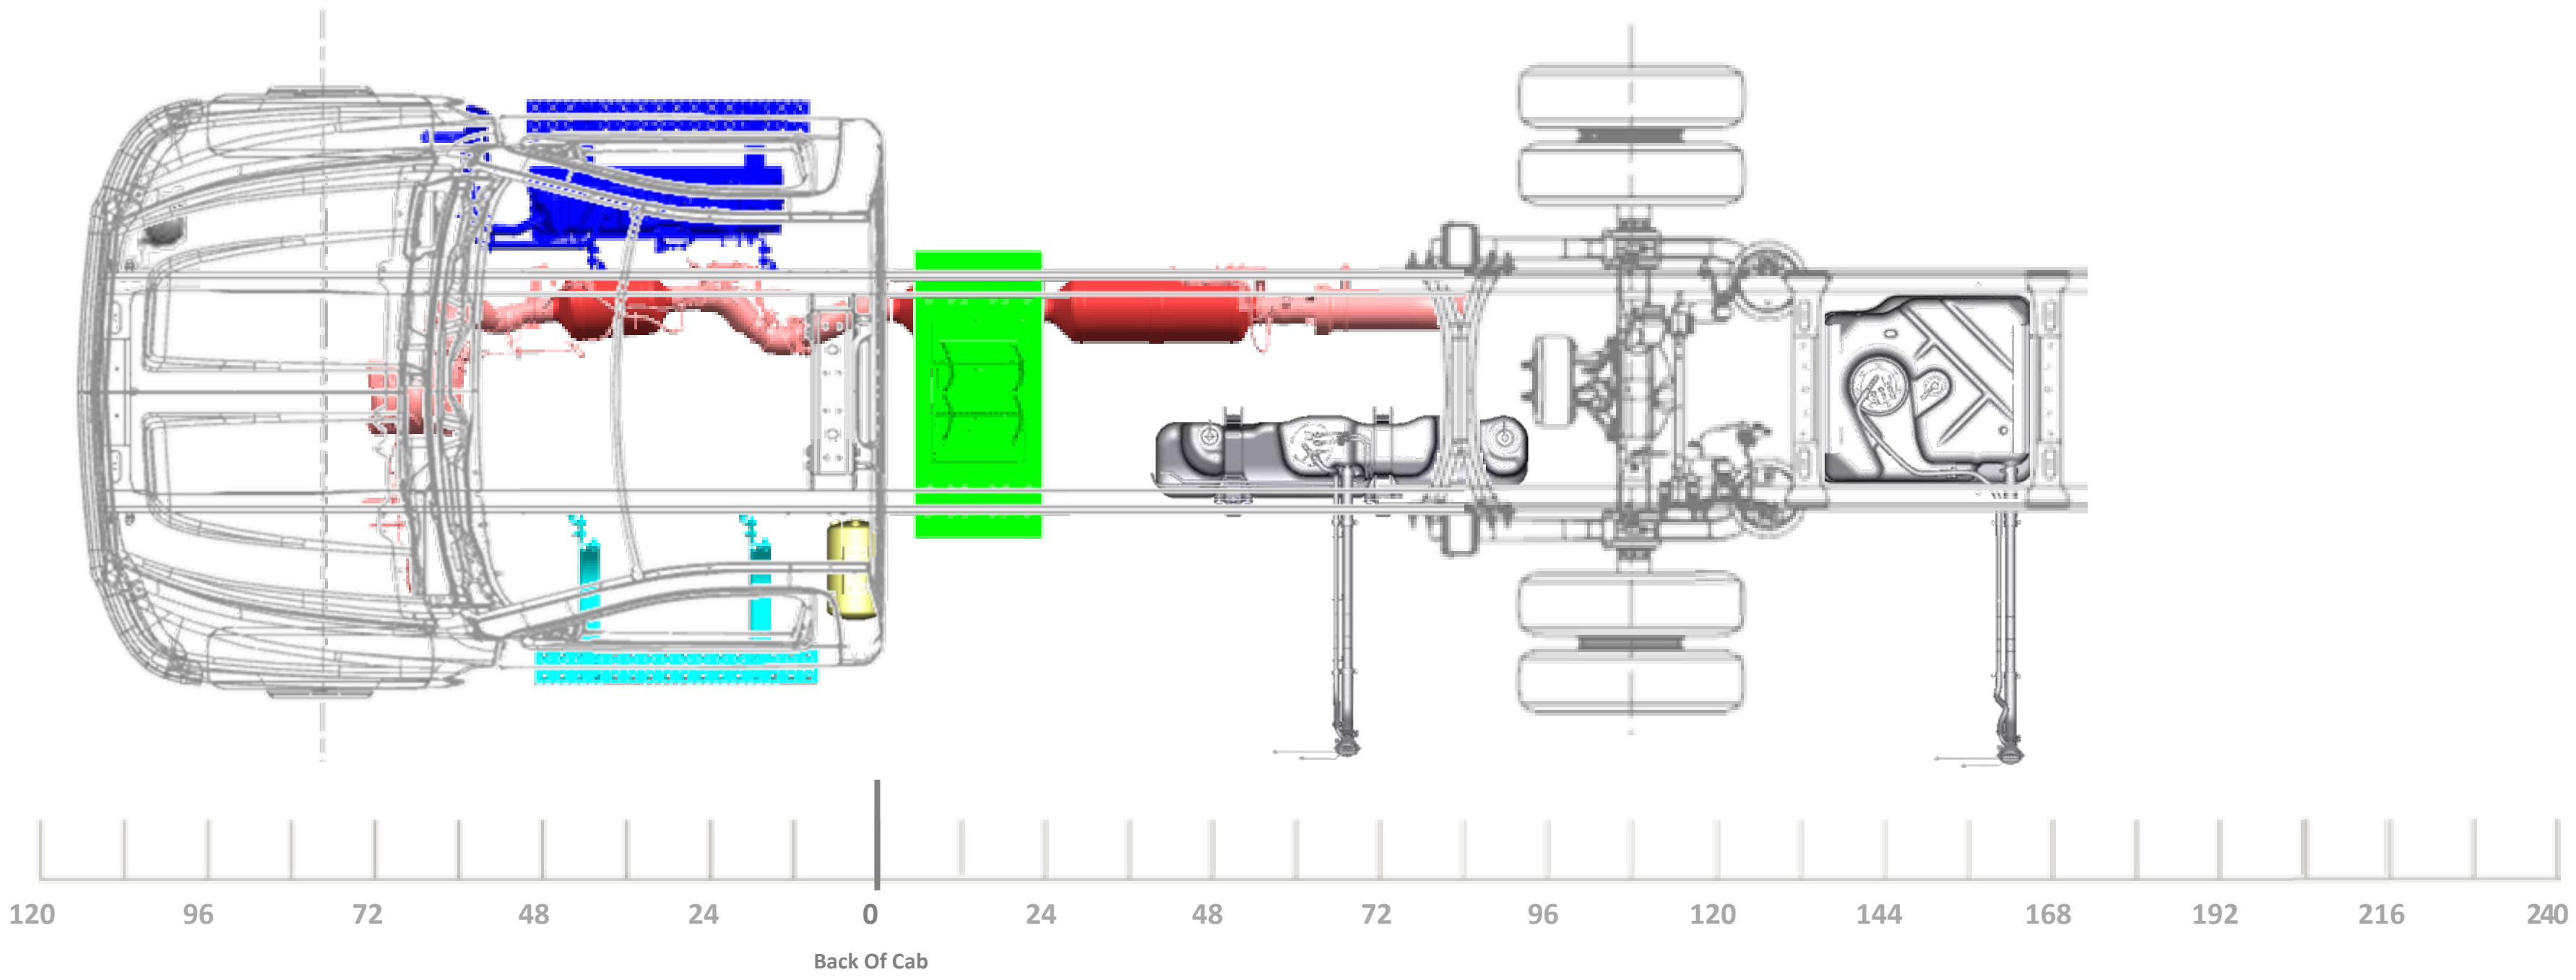
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

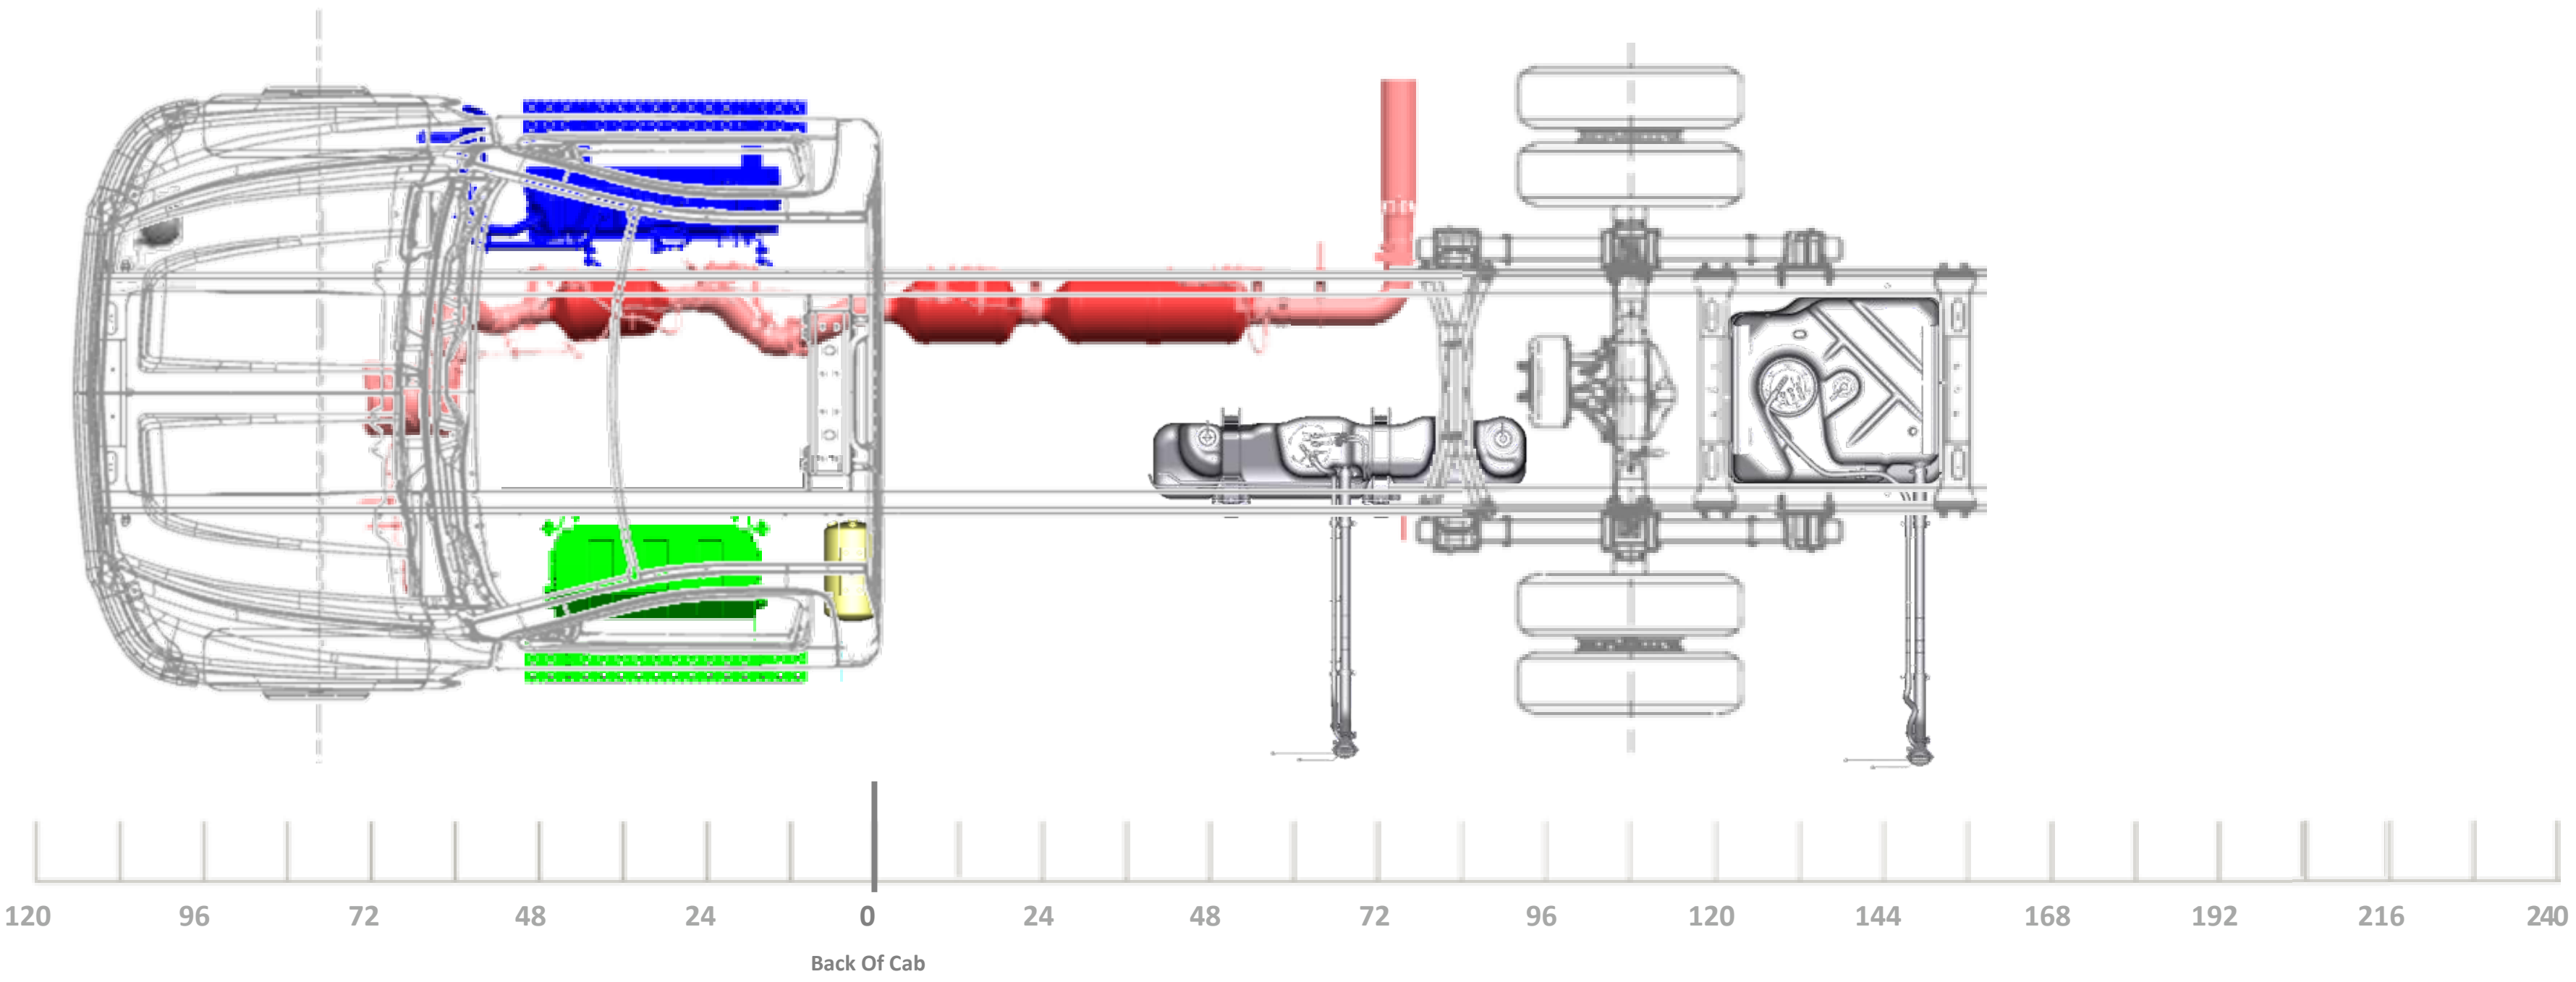
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

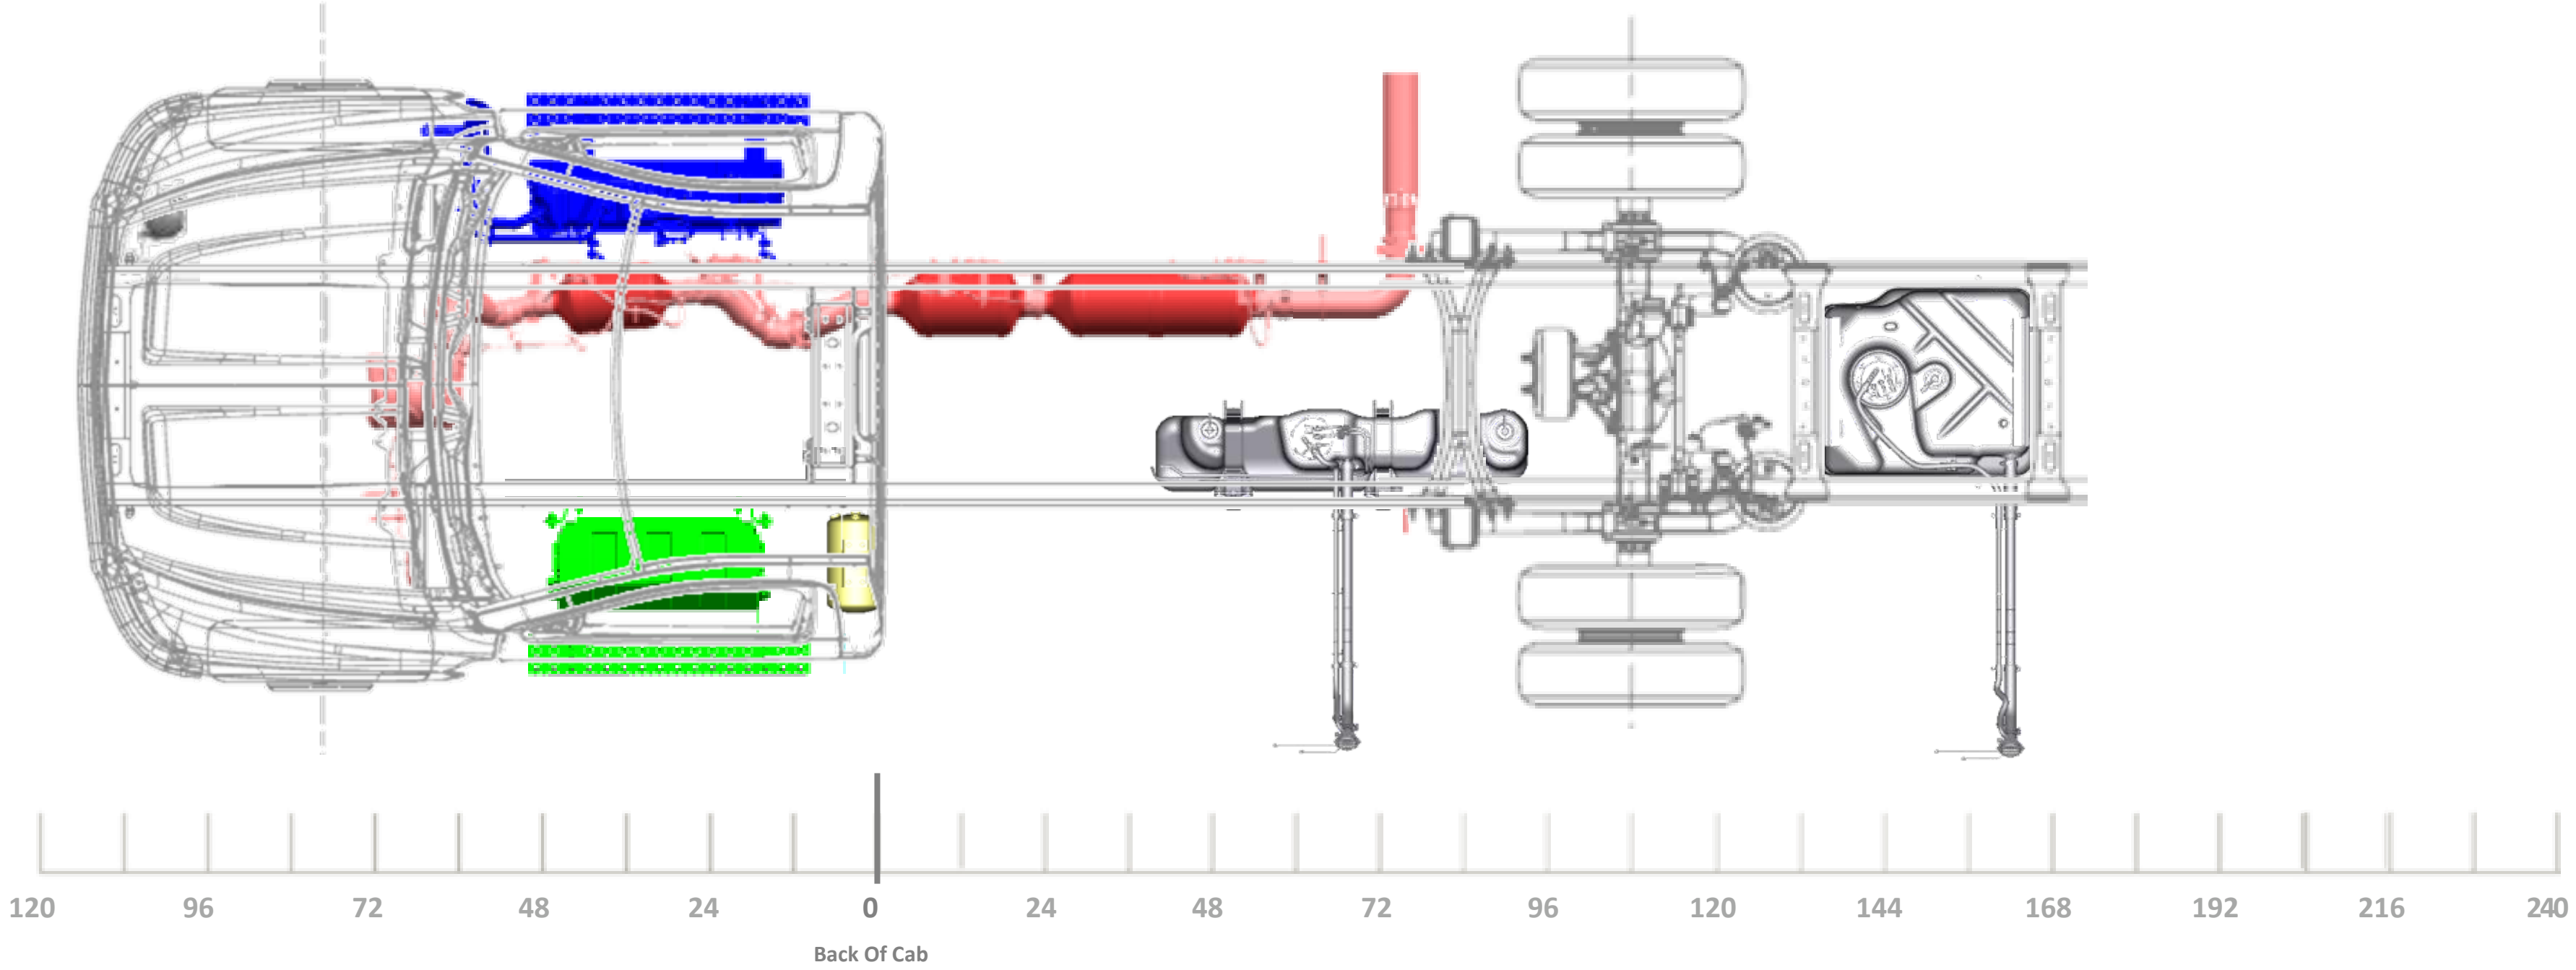
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
49”, 63”, OR 75” AF

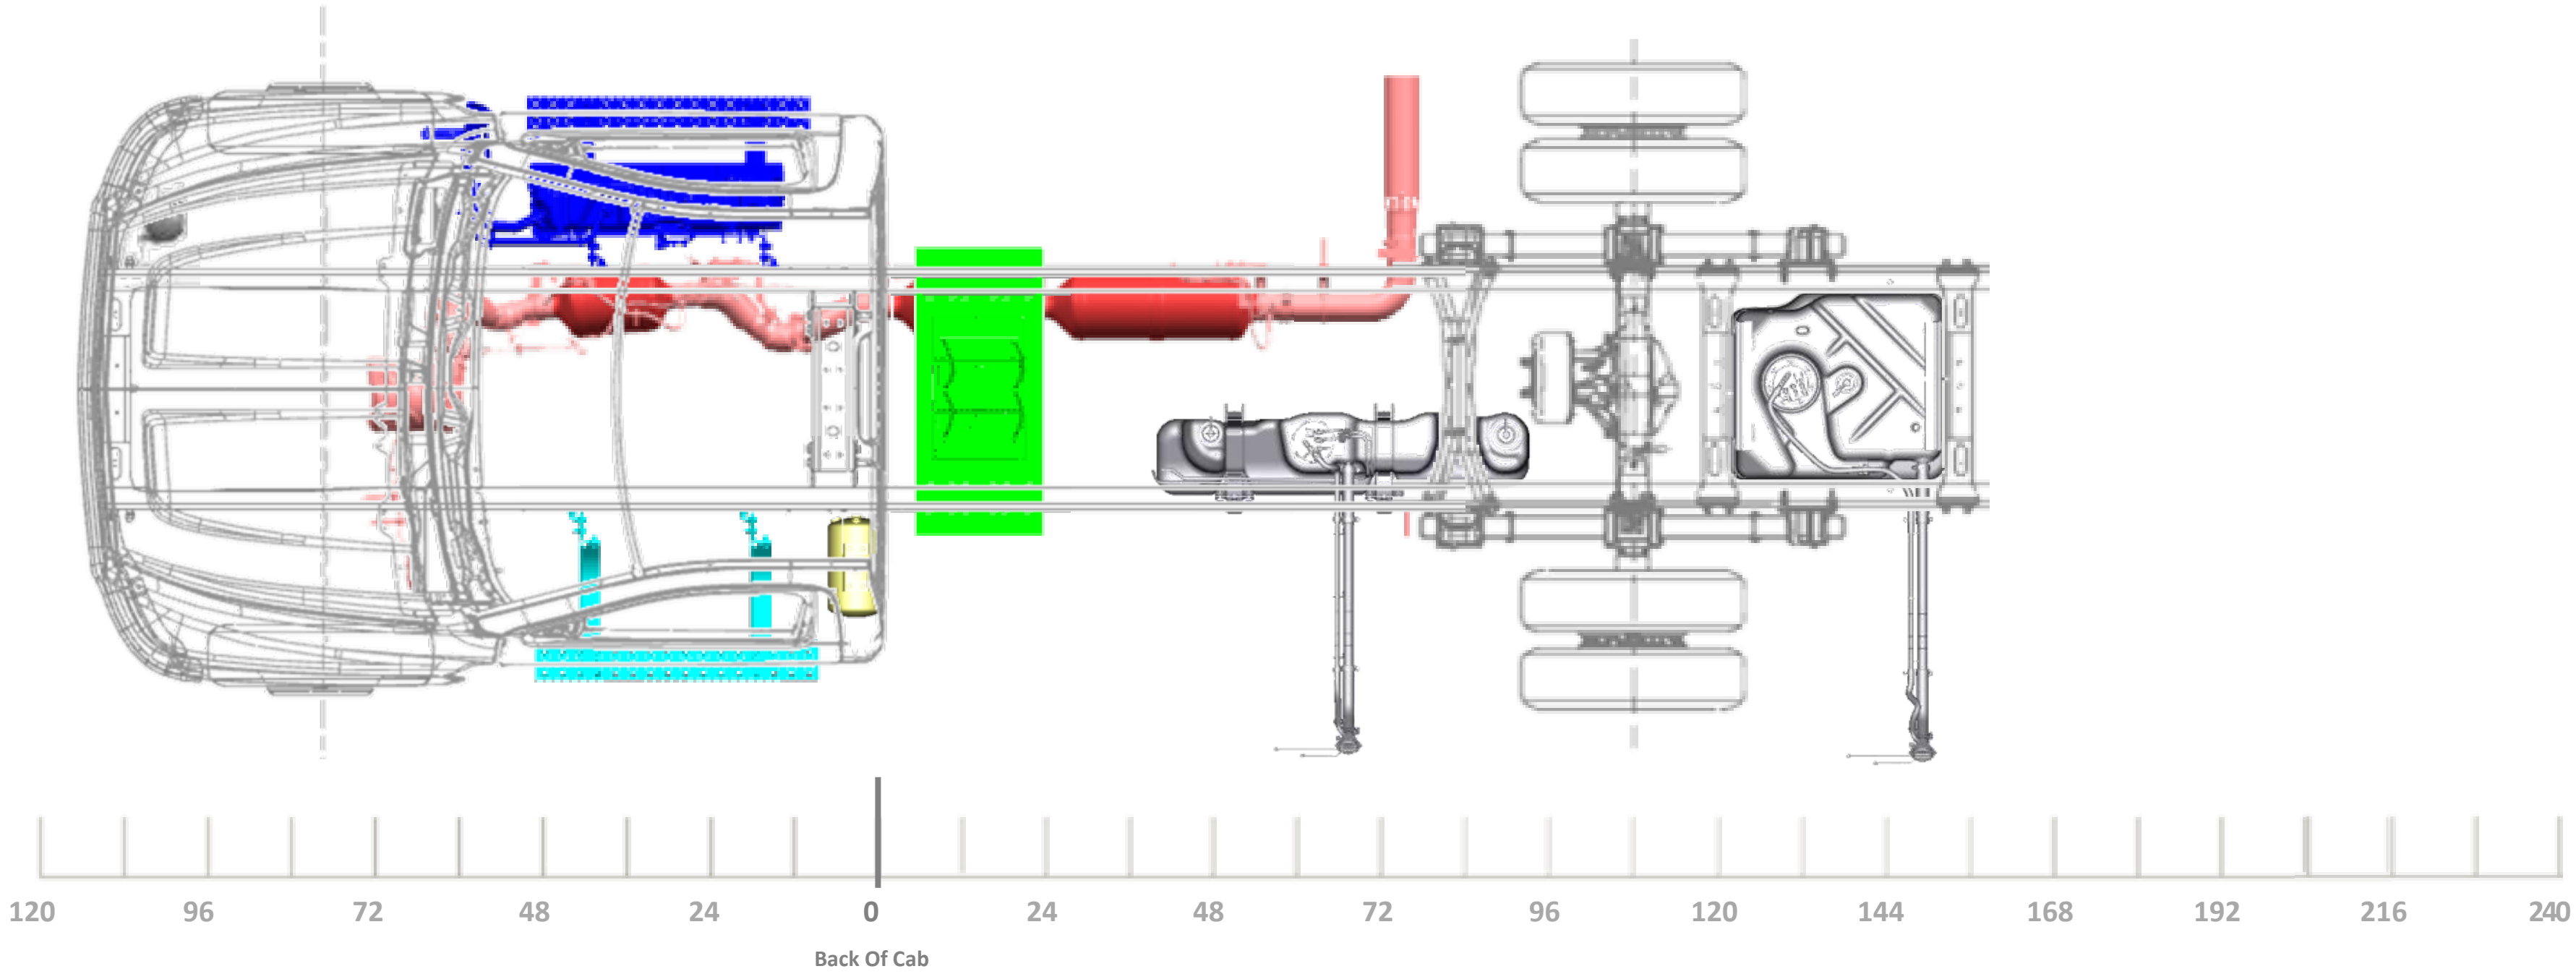
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

189” WB (108” CA)
63” OR 75” AF

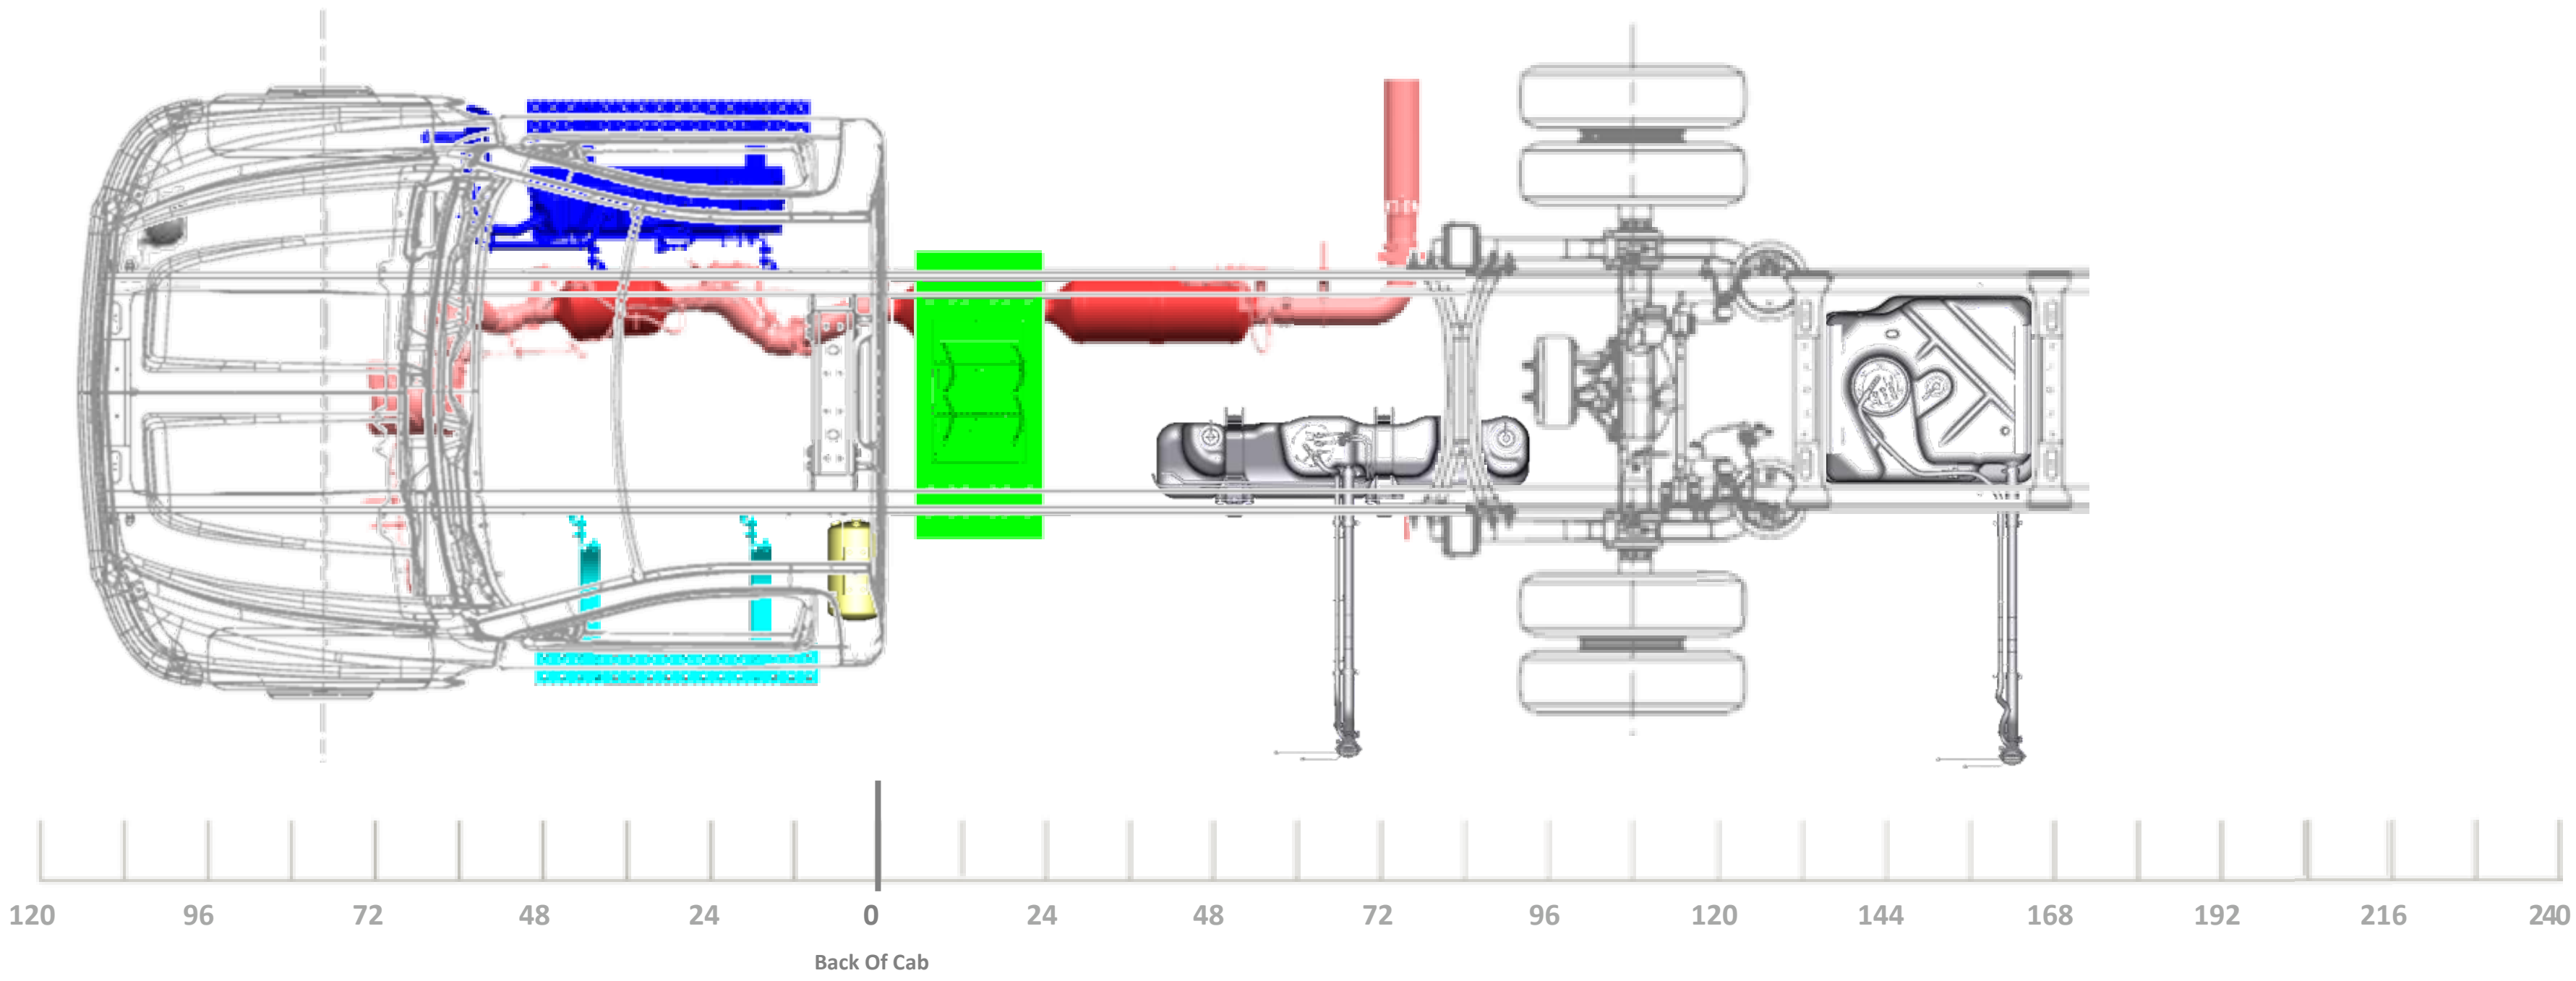
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

REGULAR
CAB 201”
WB

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

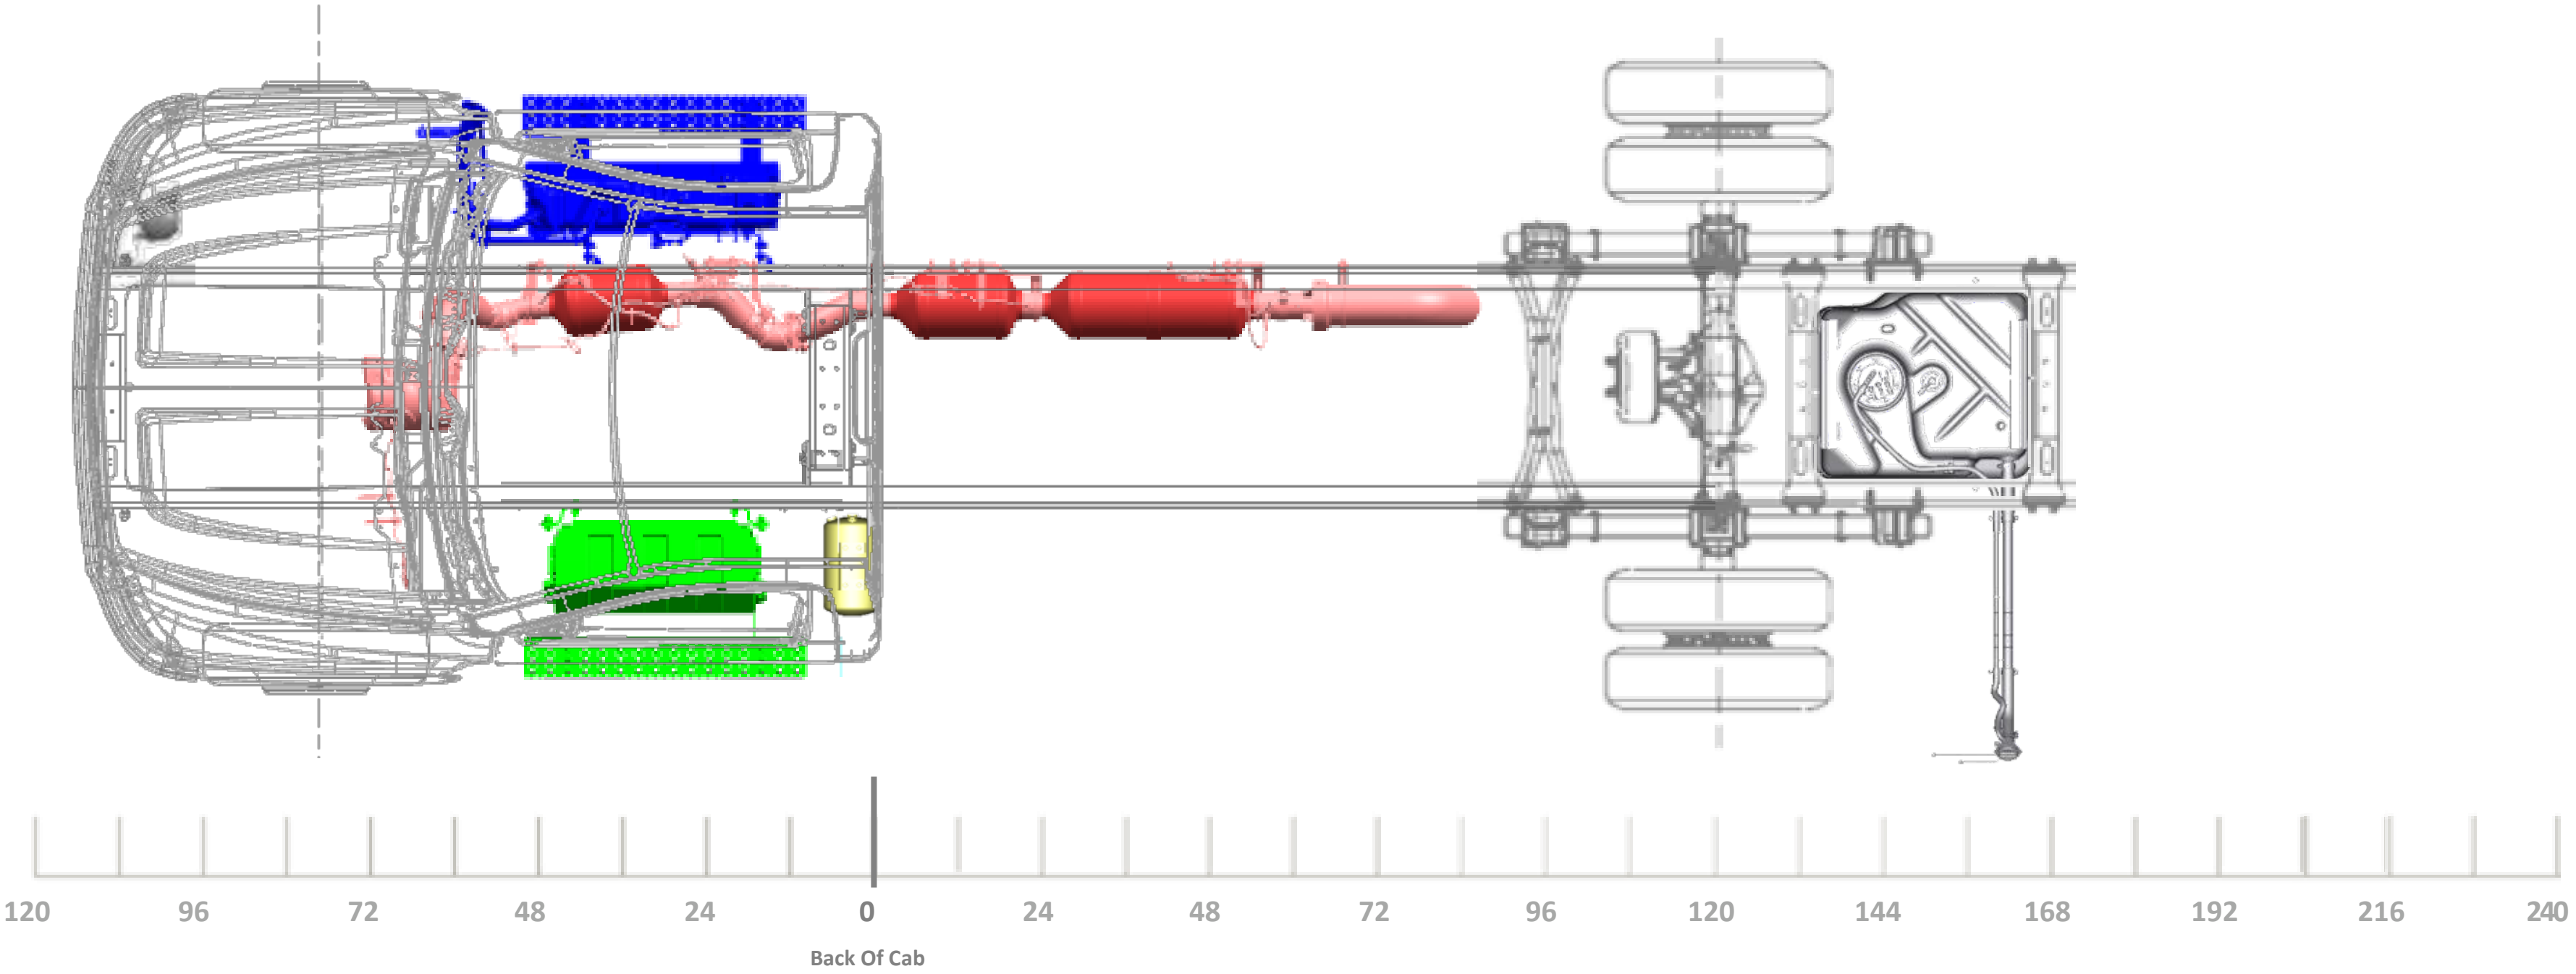
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

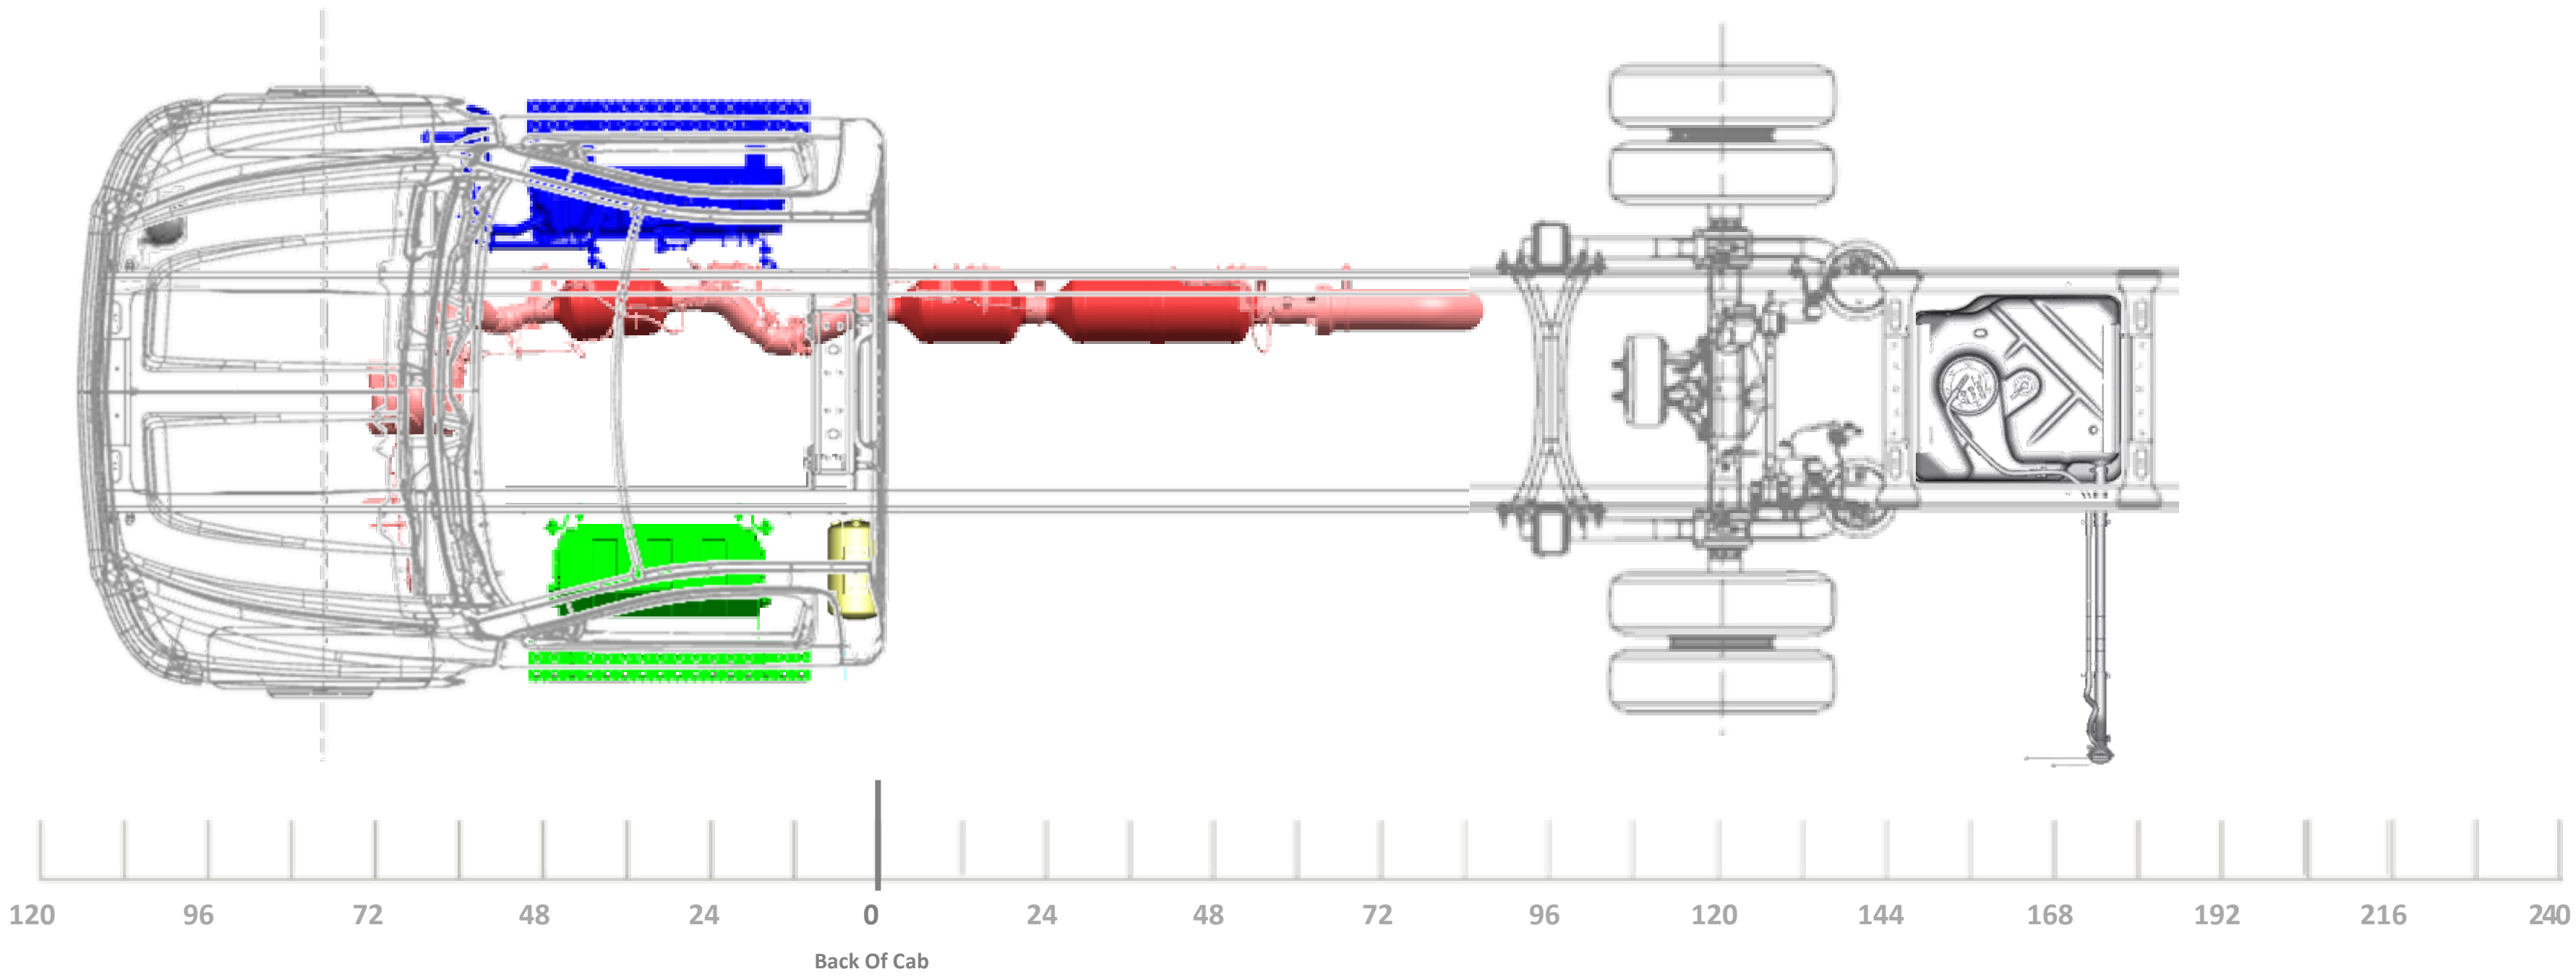
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

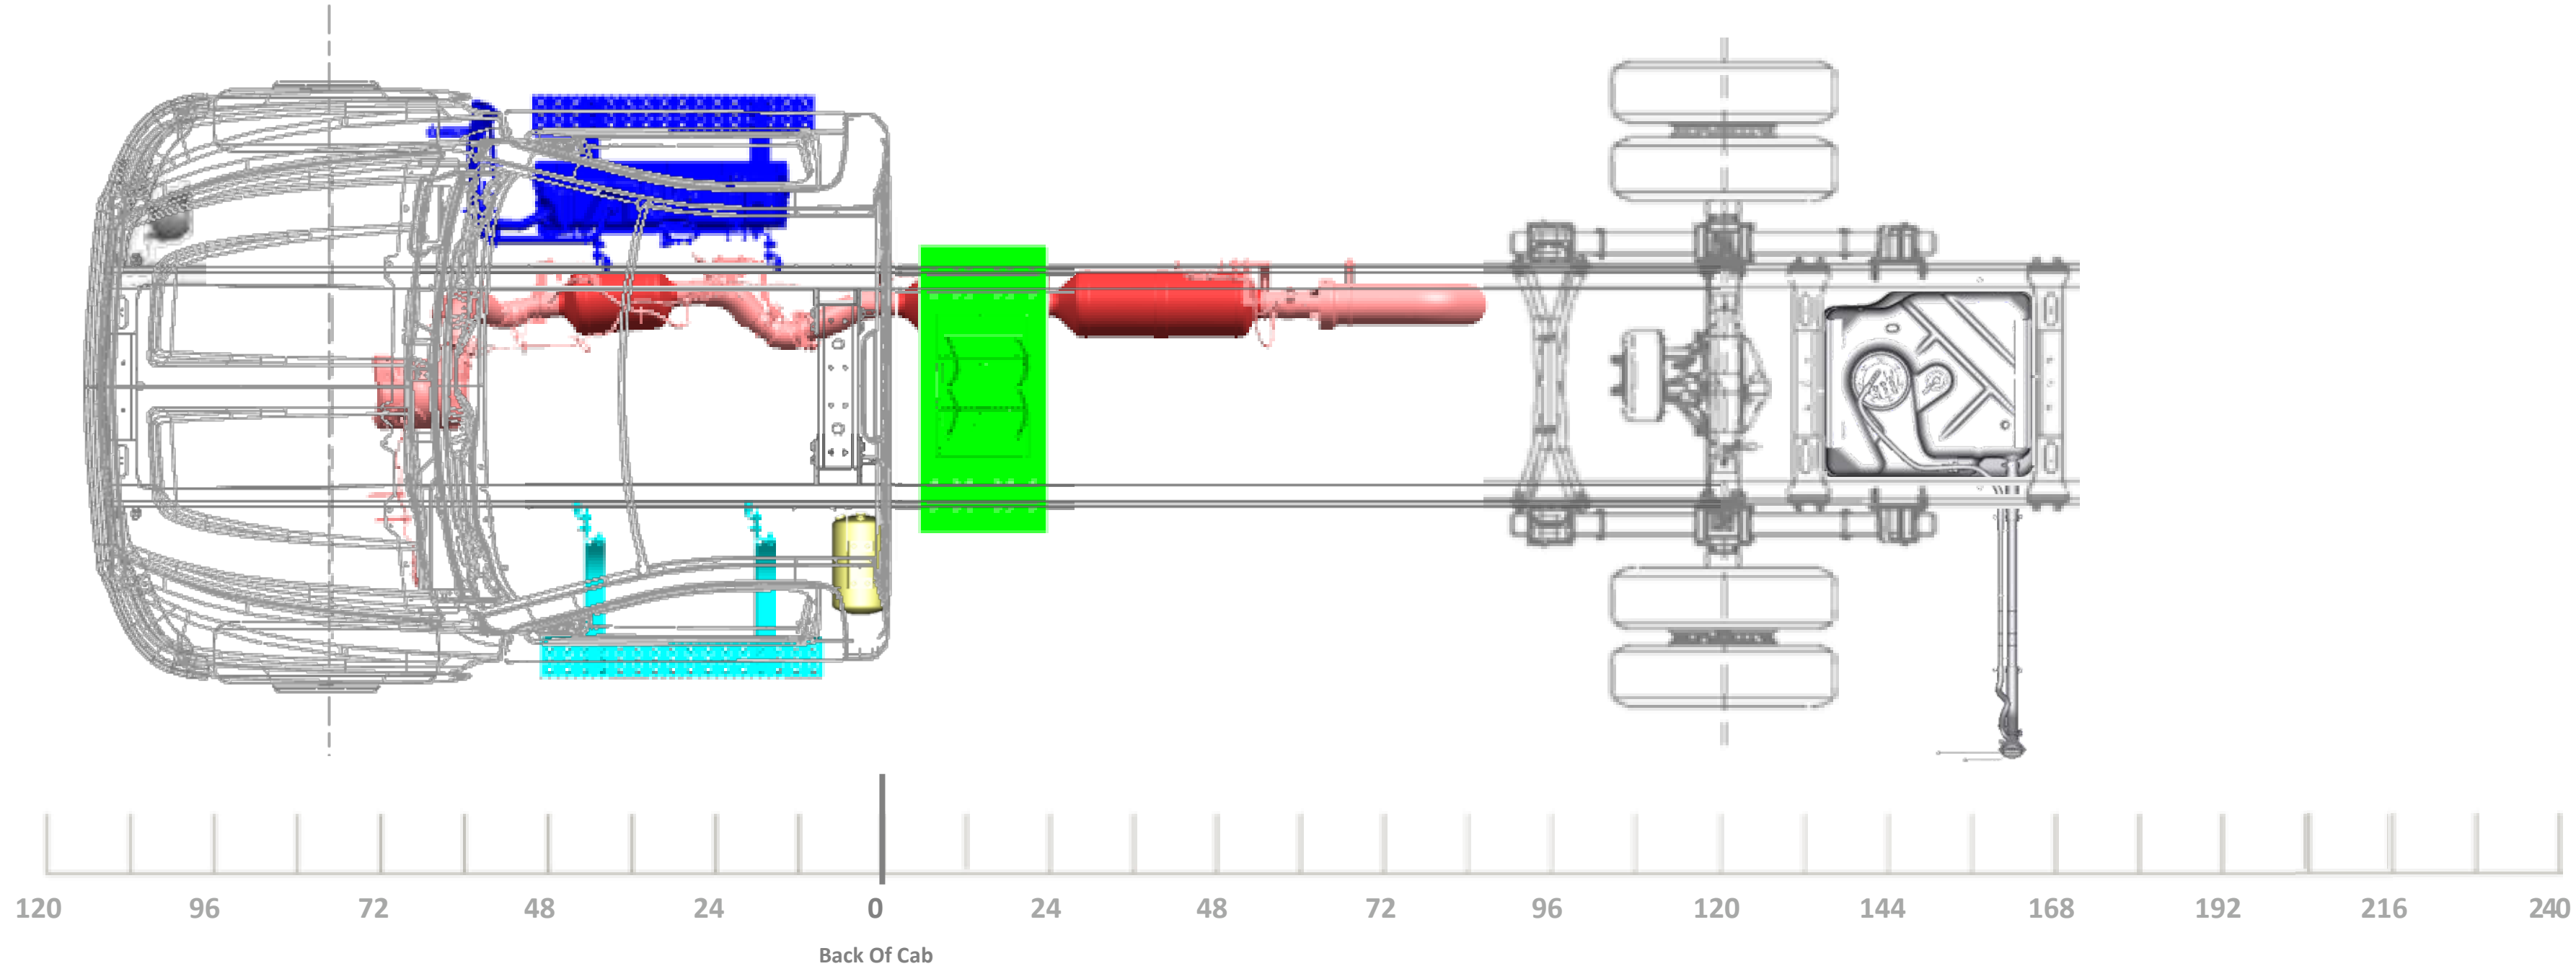
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

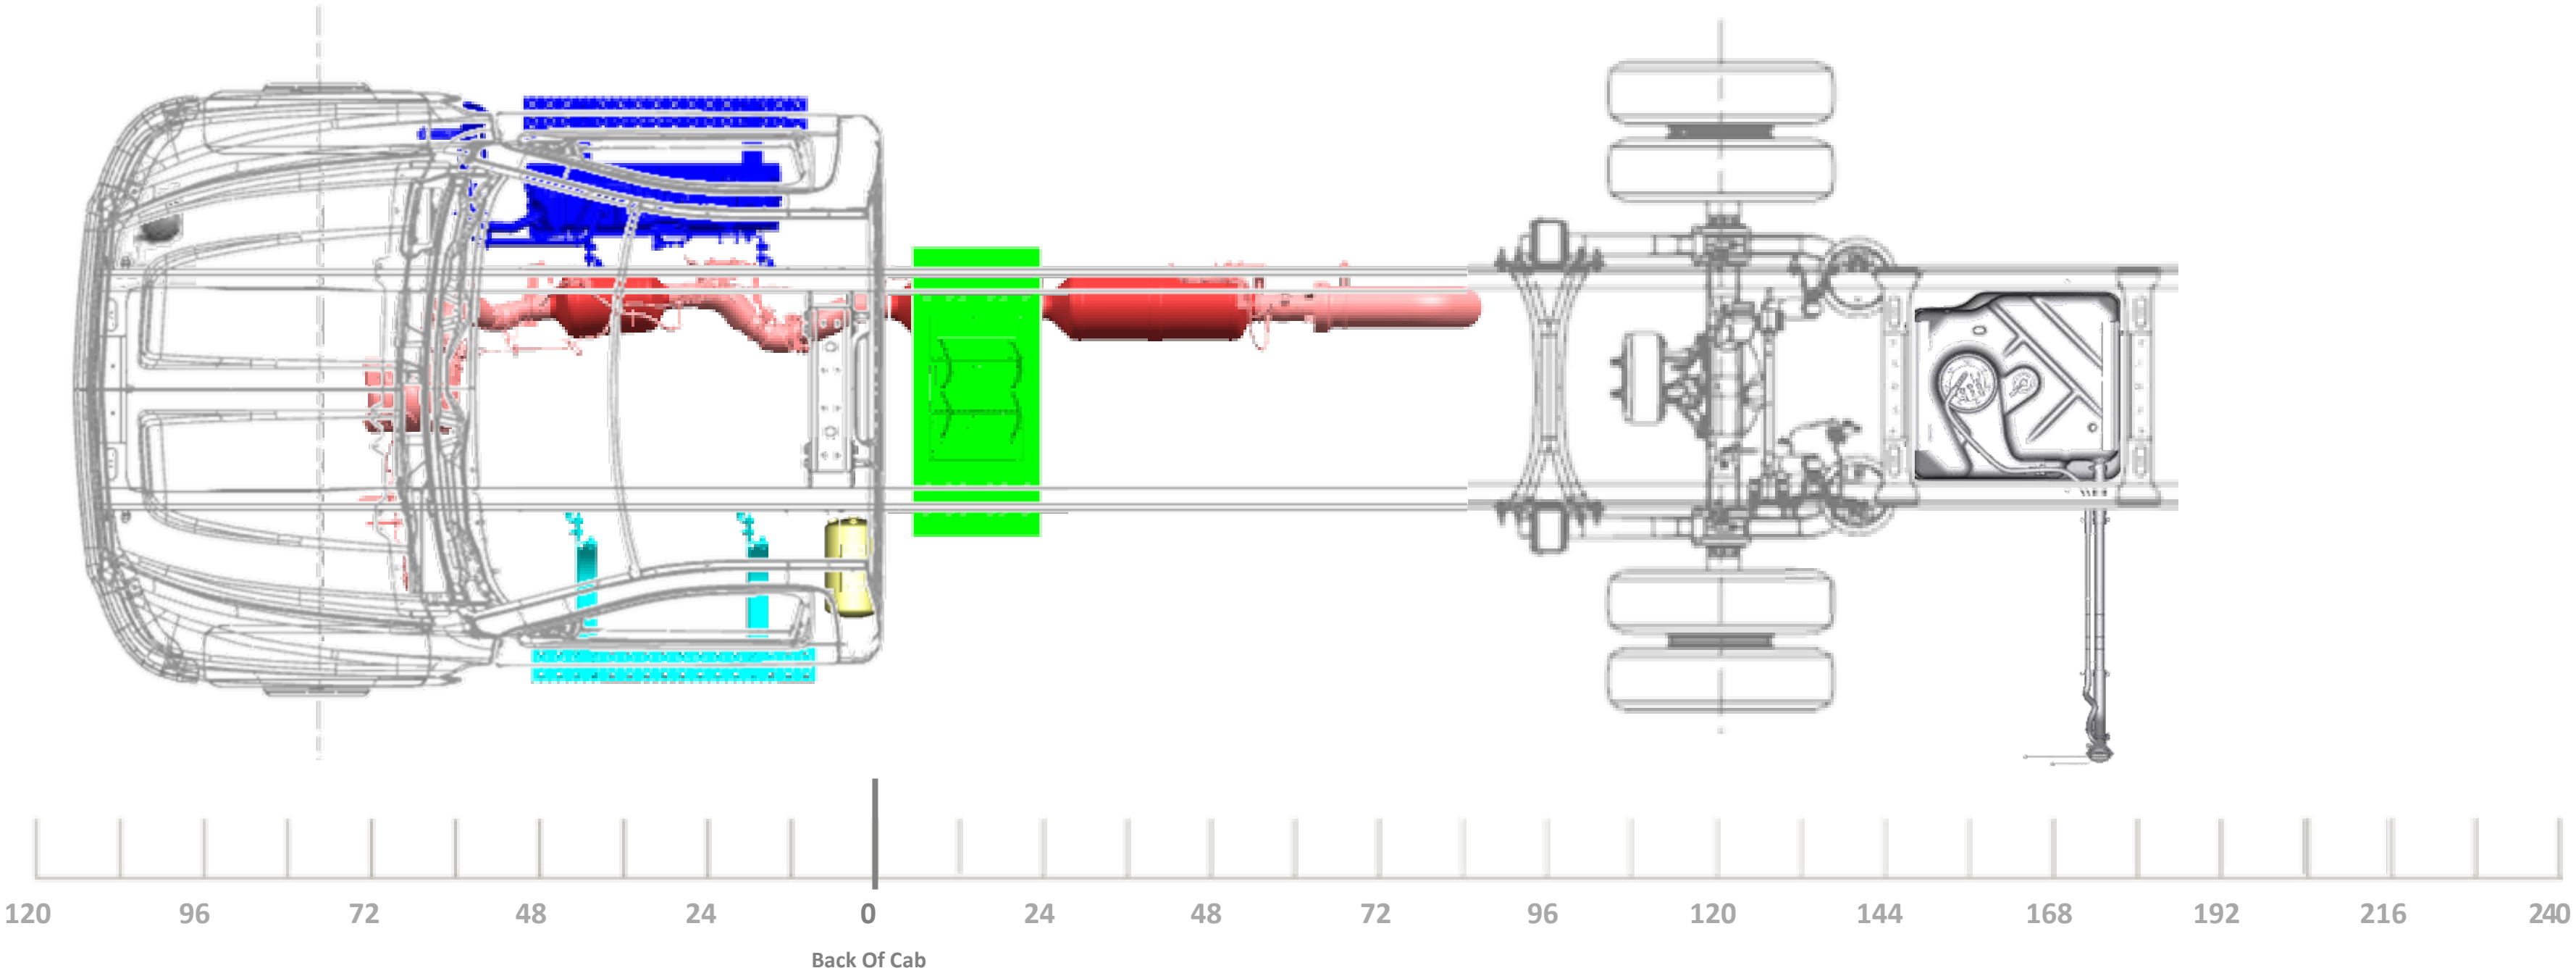
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

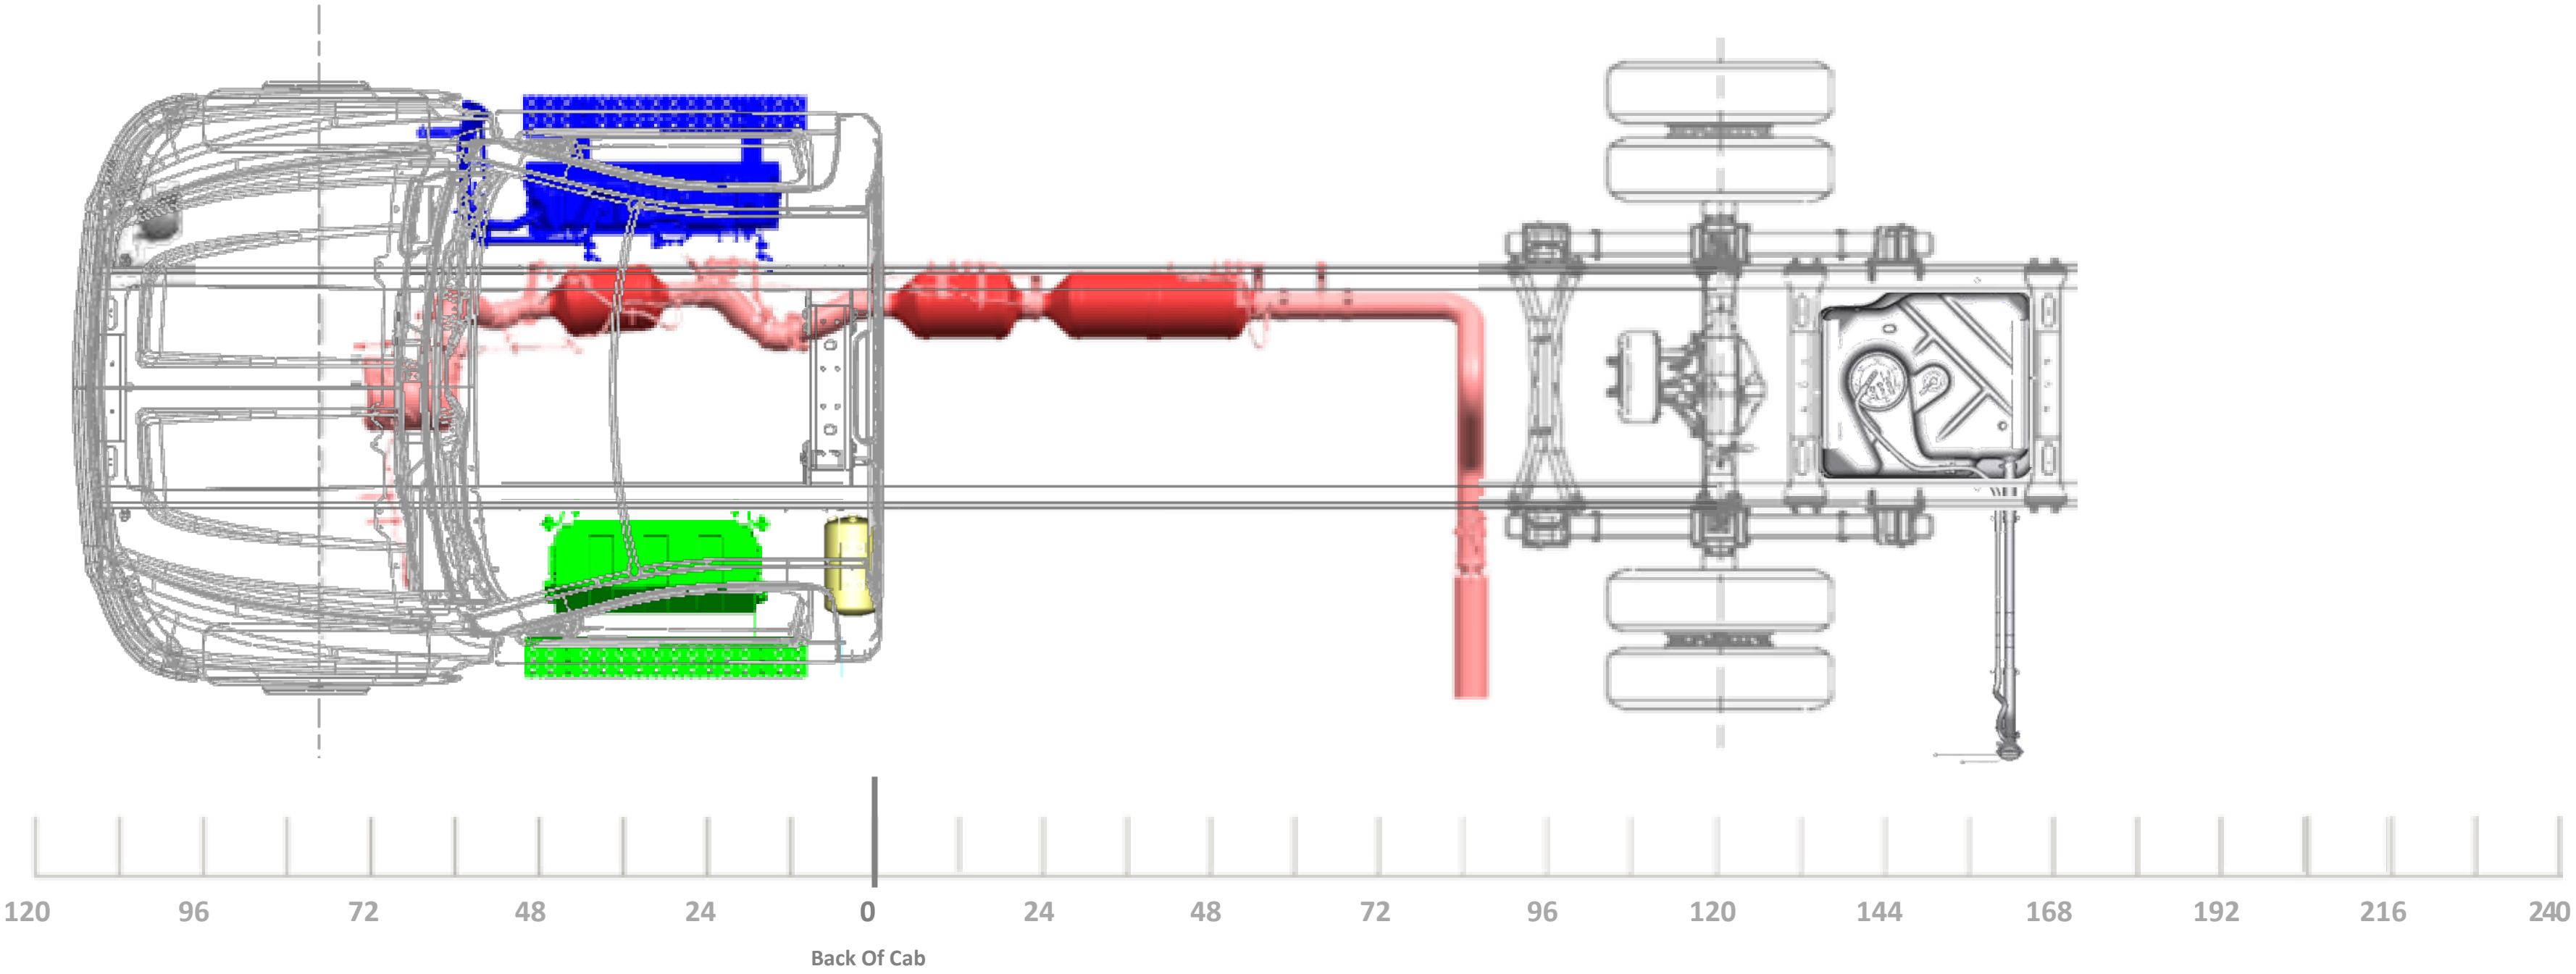
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

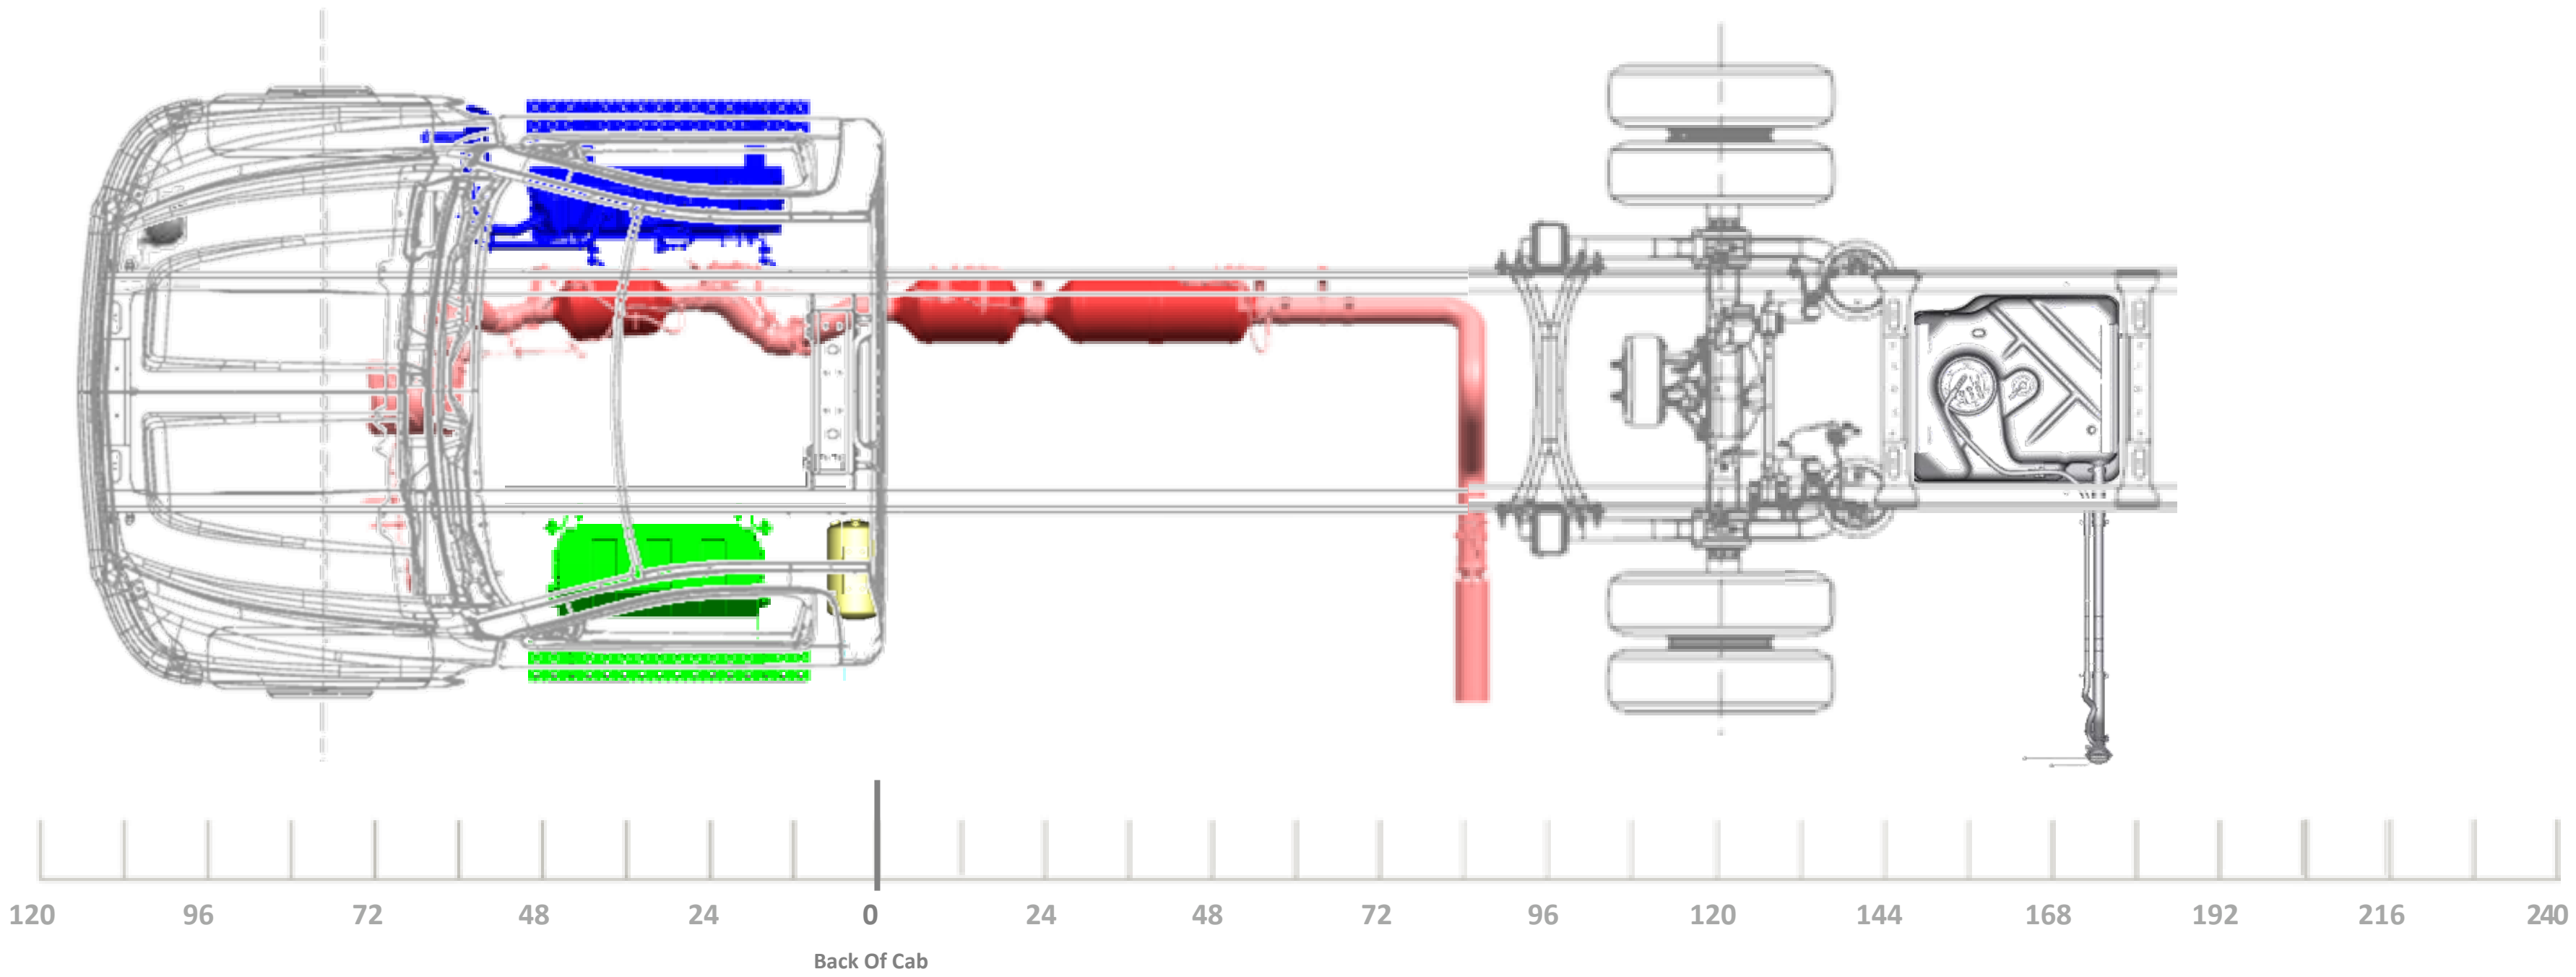
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

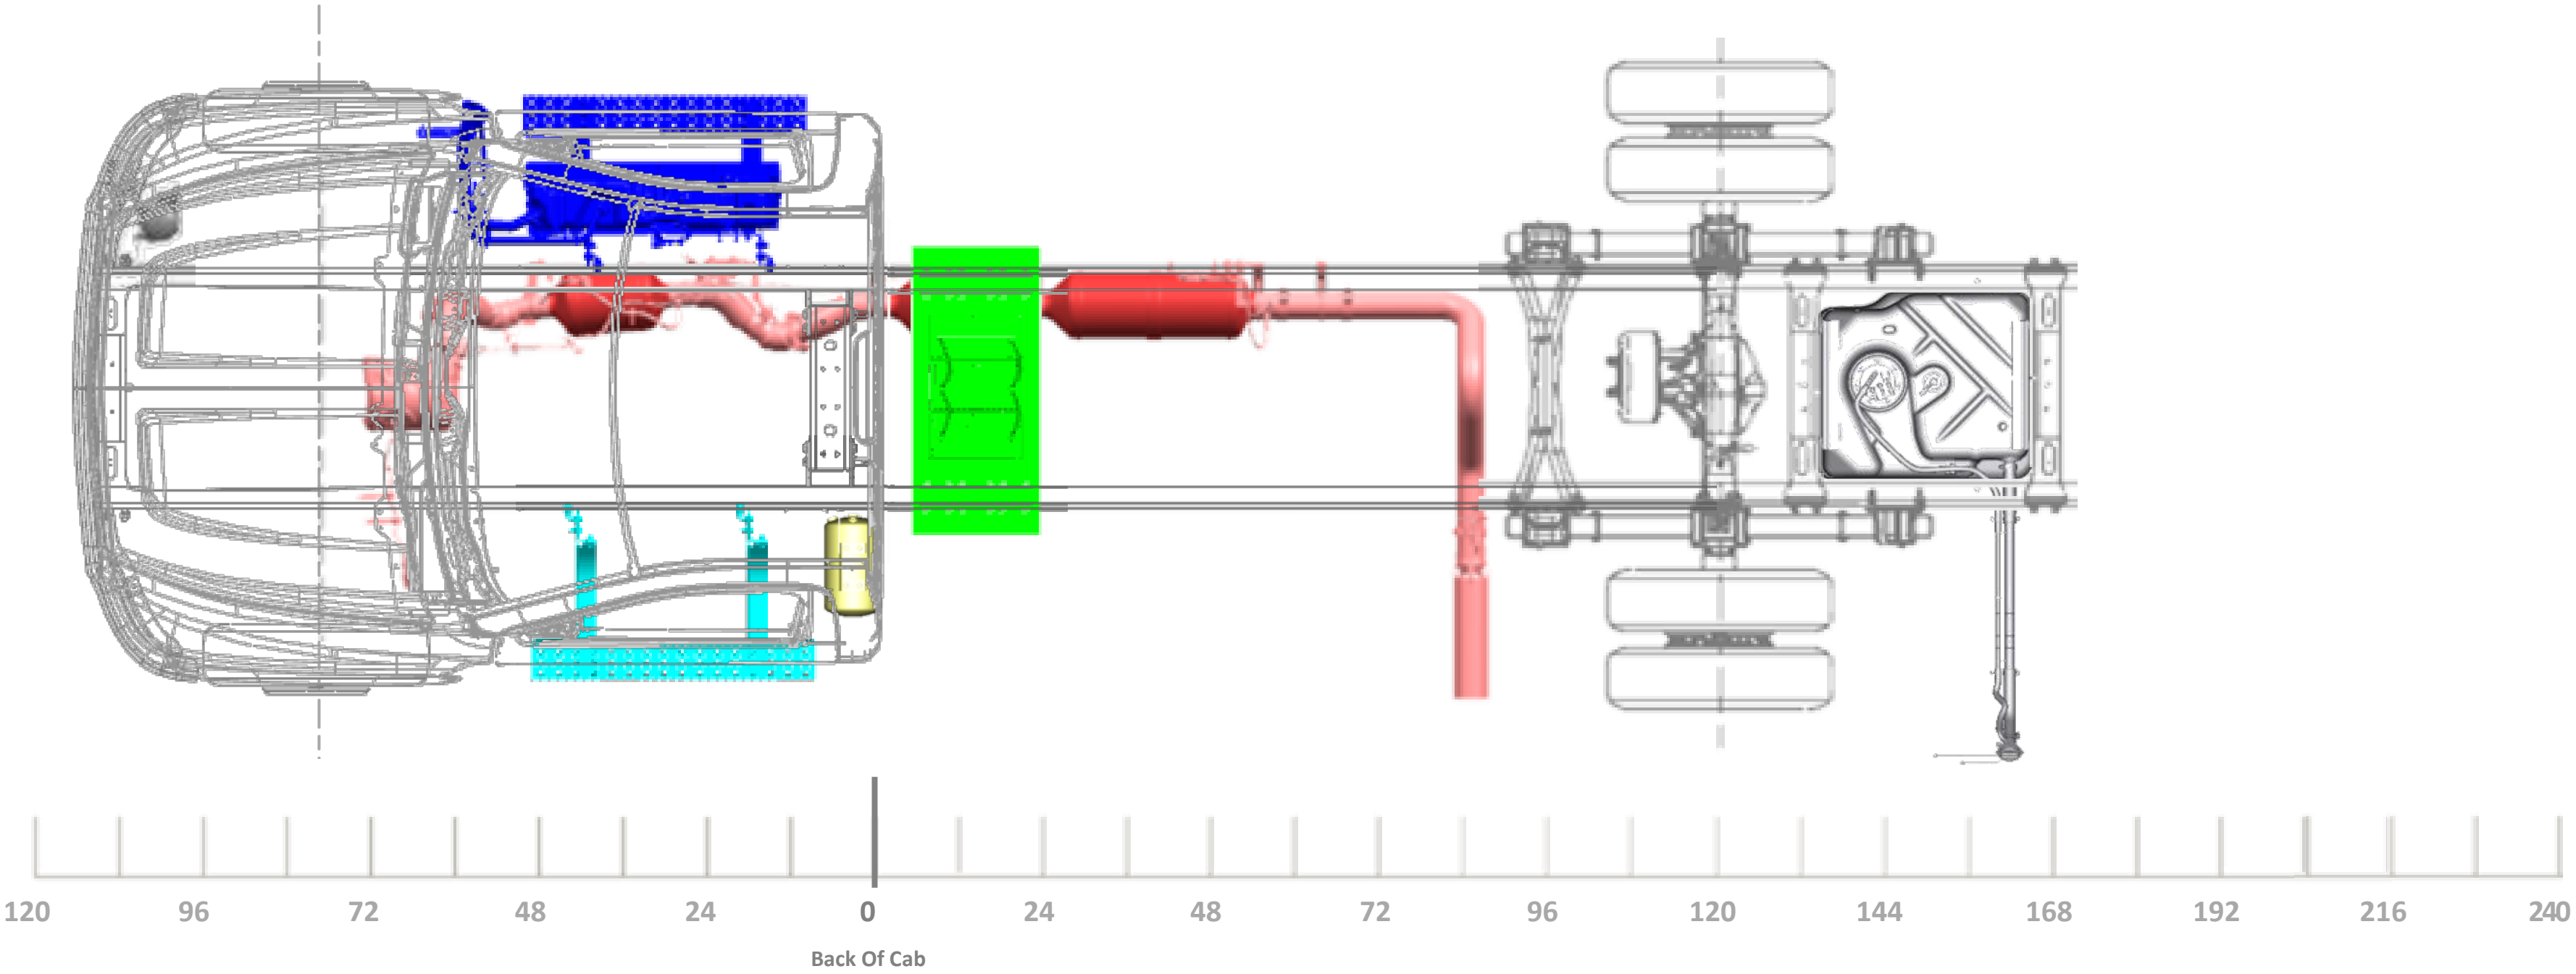
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

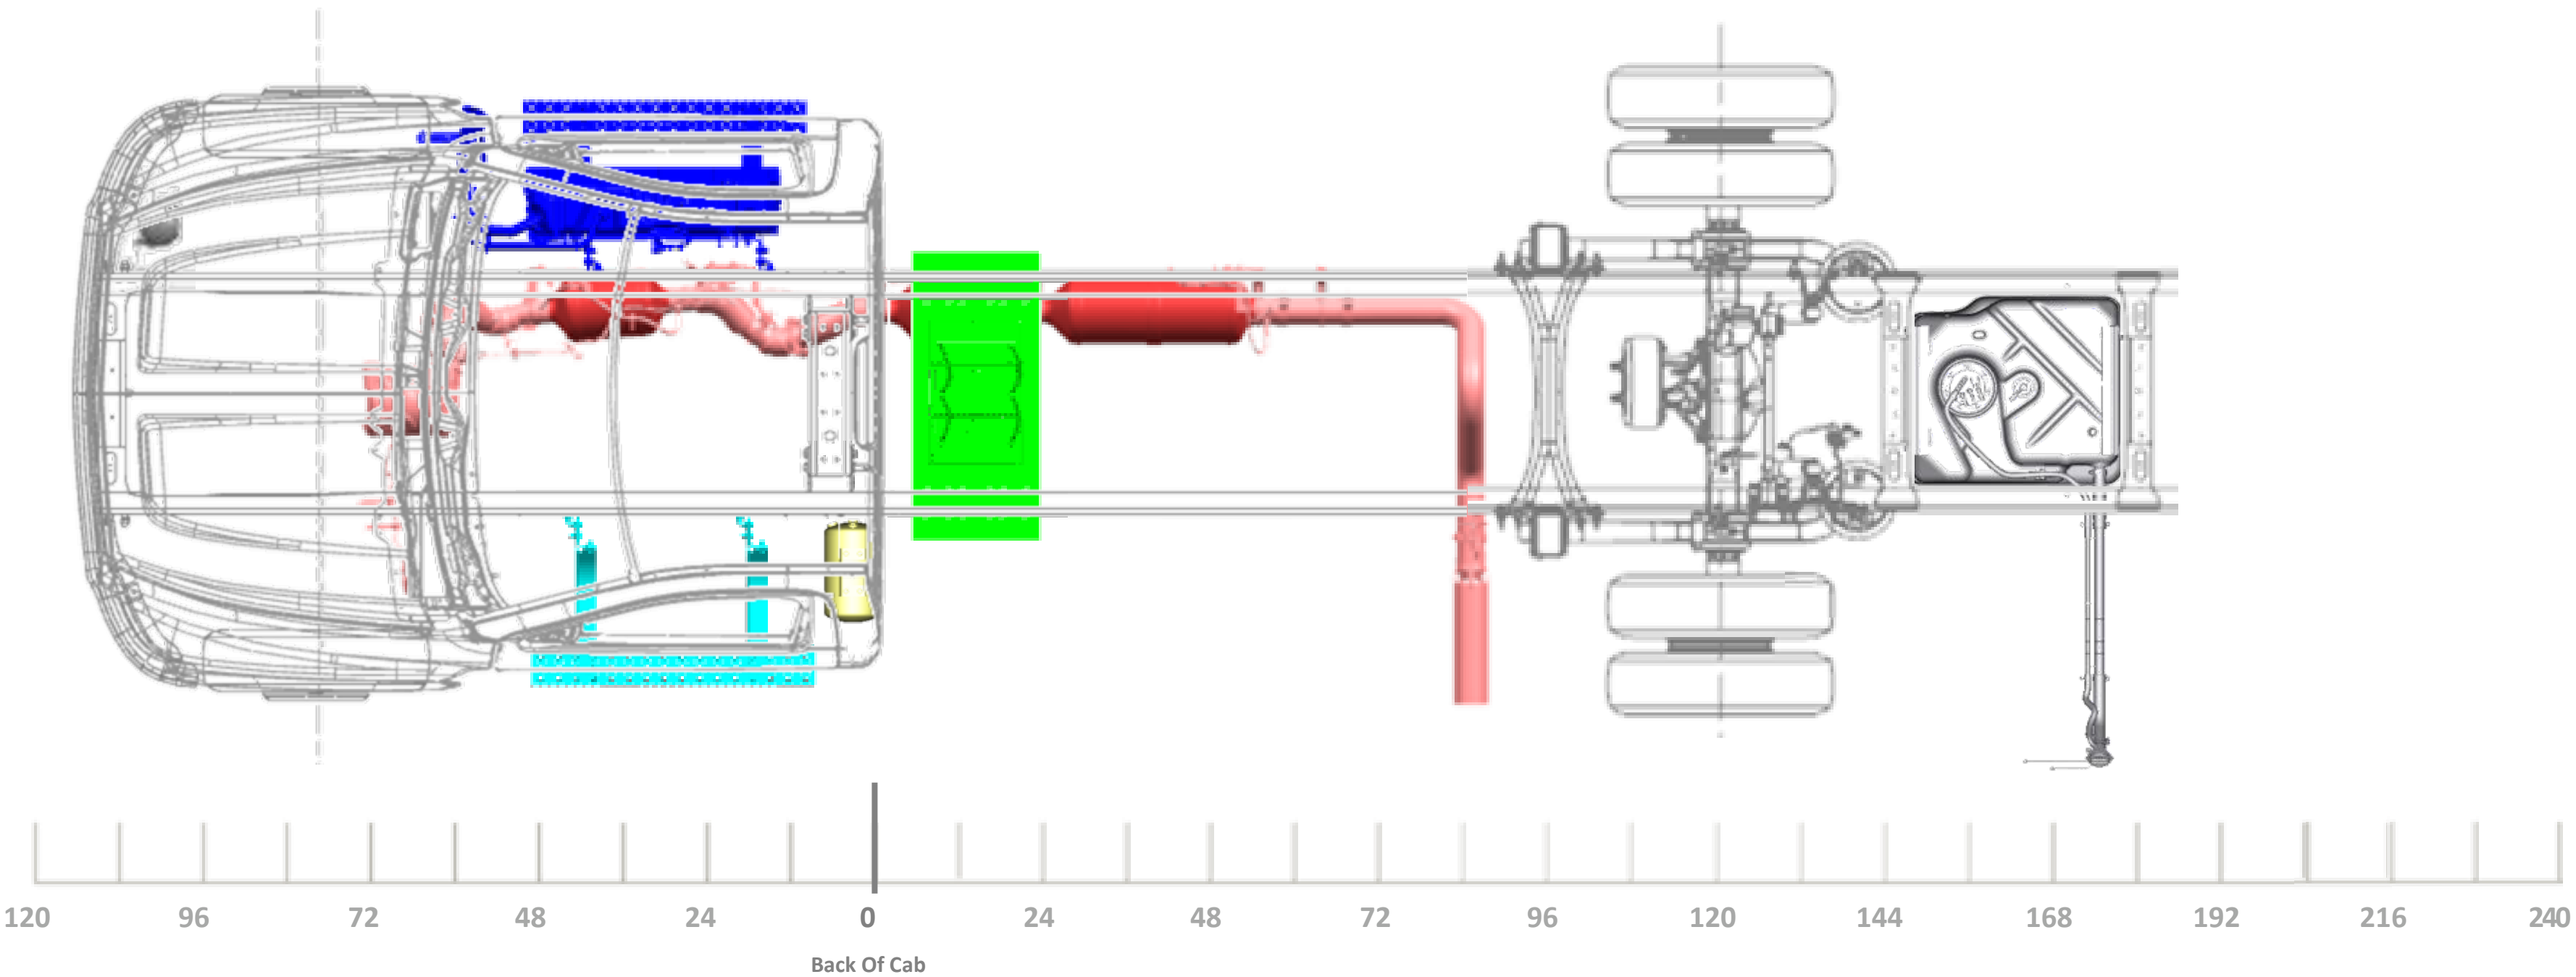
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

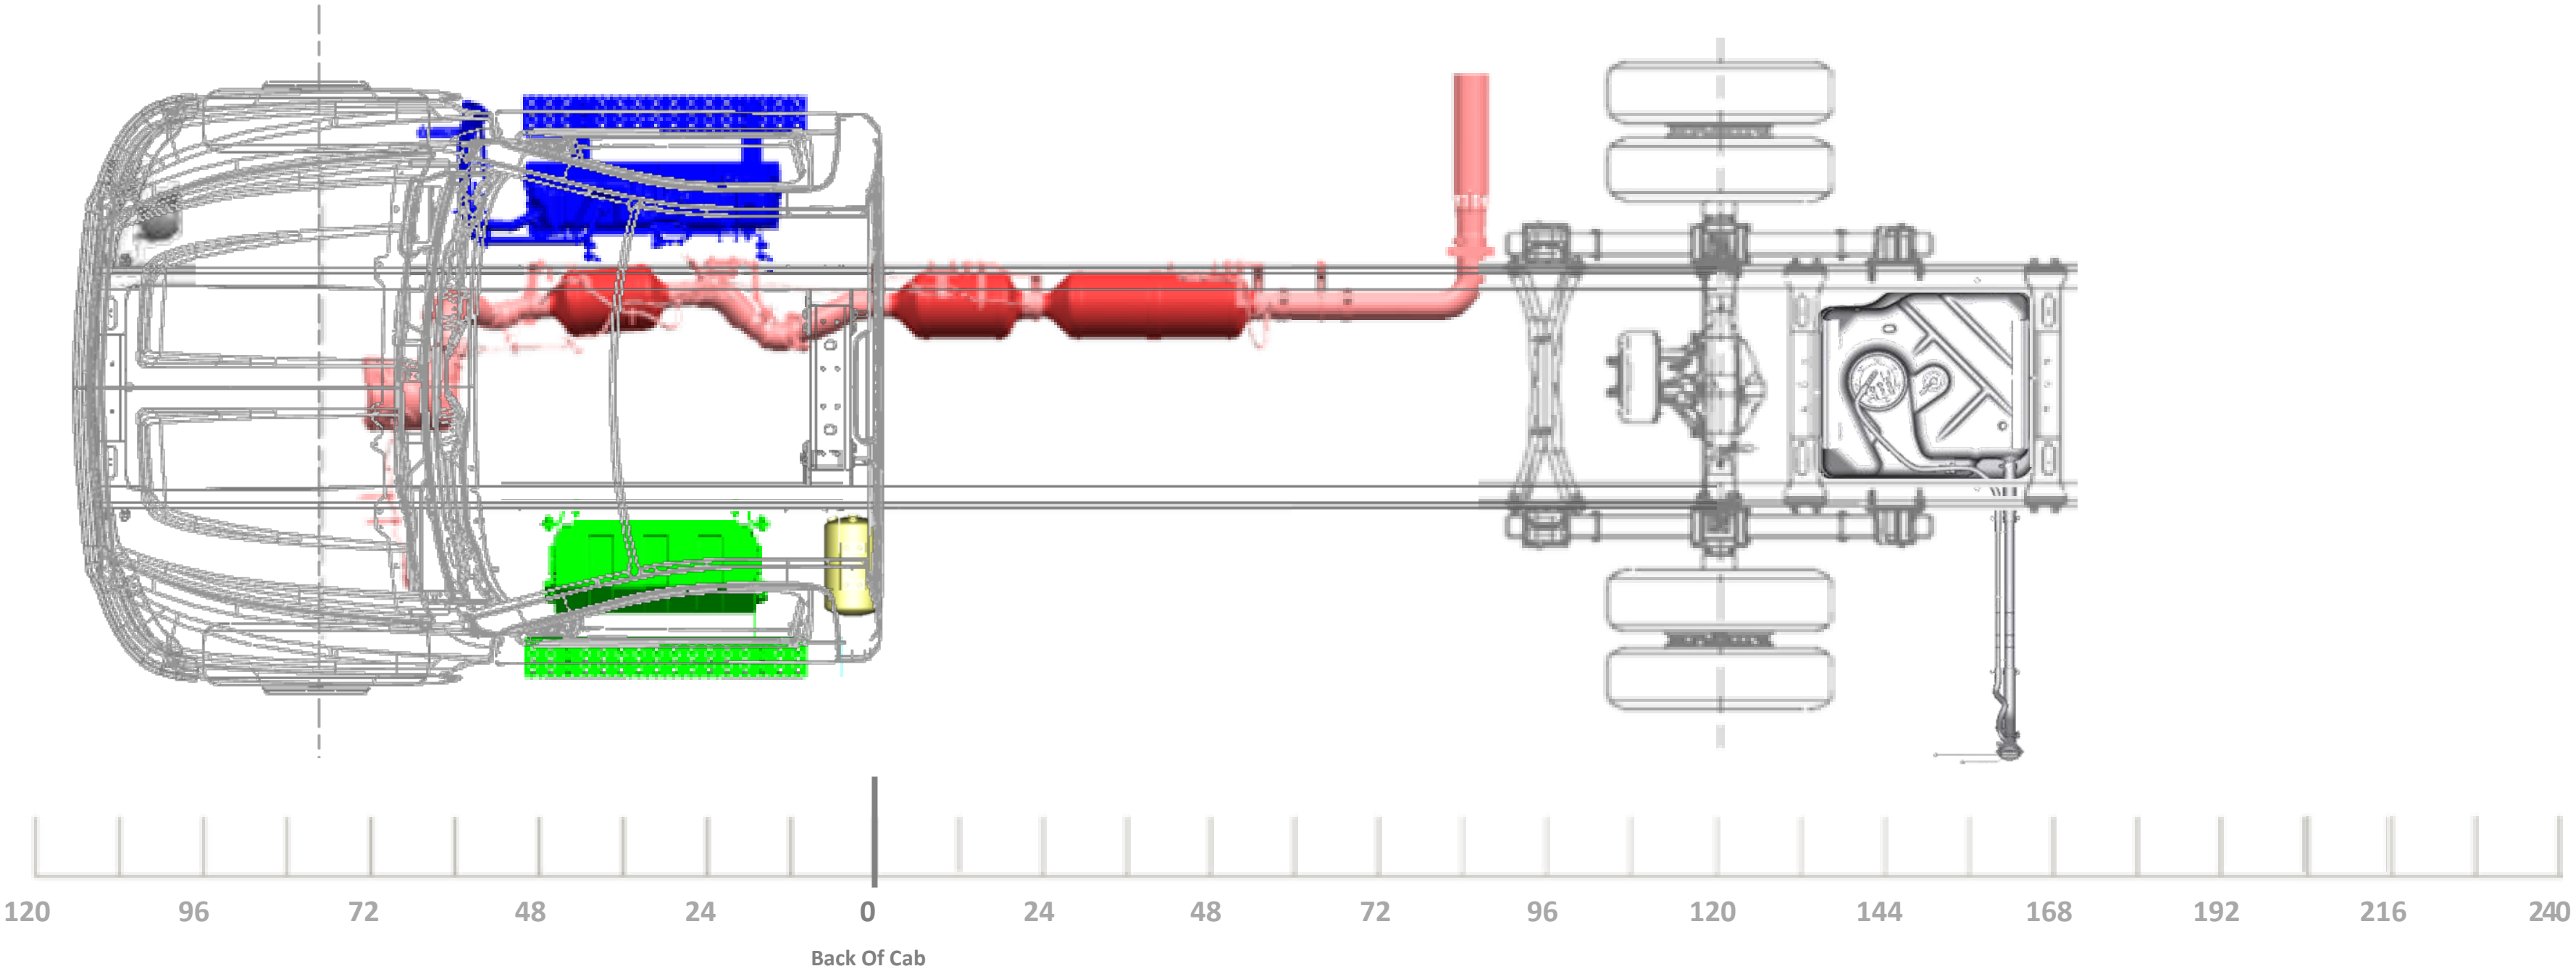
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

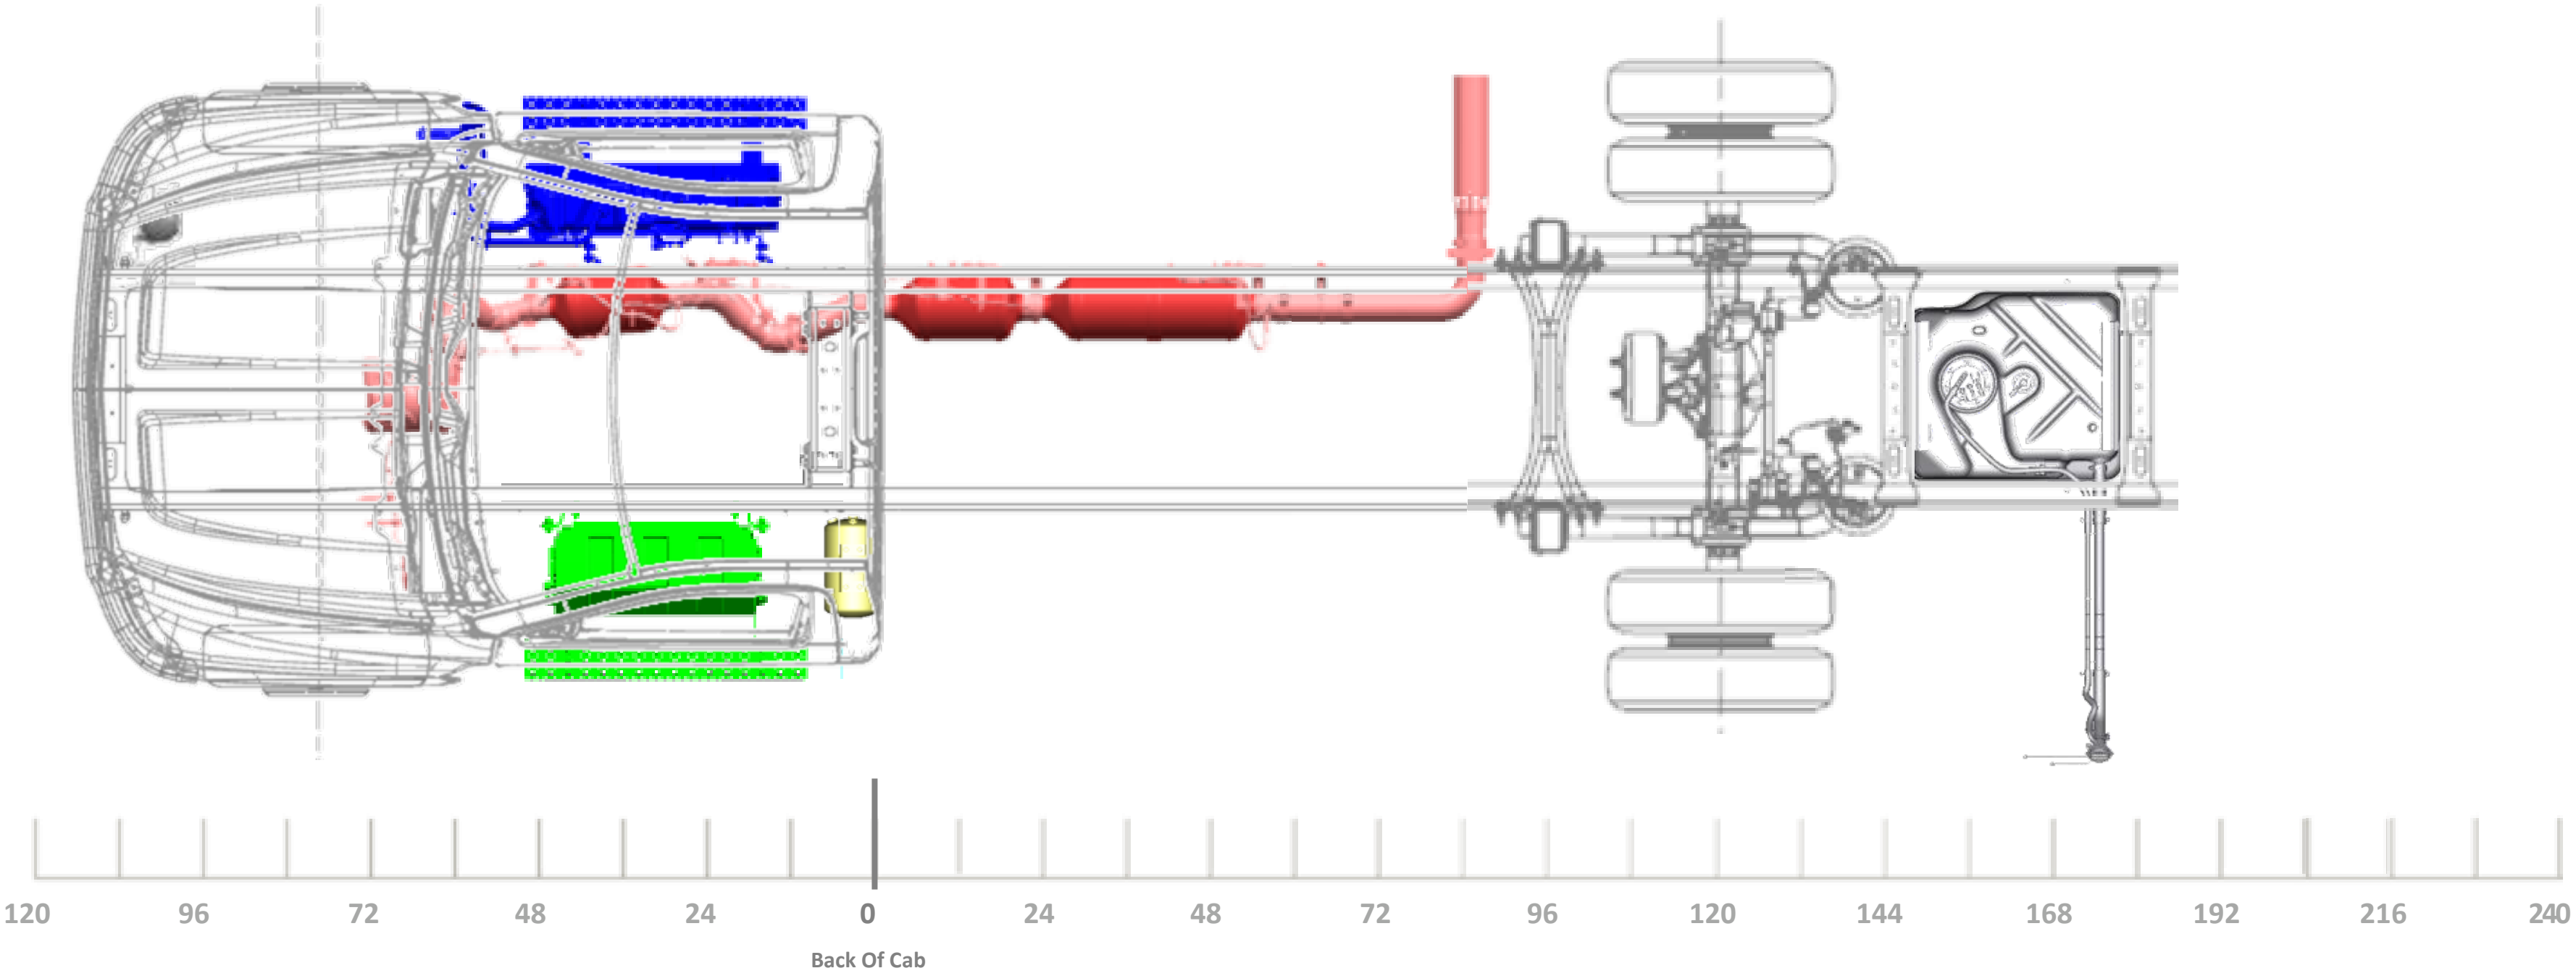
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

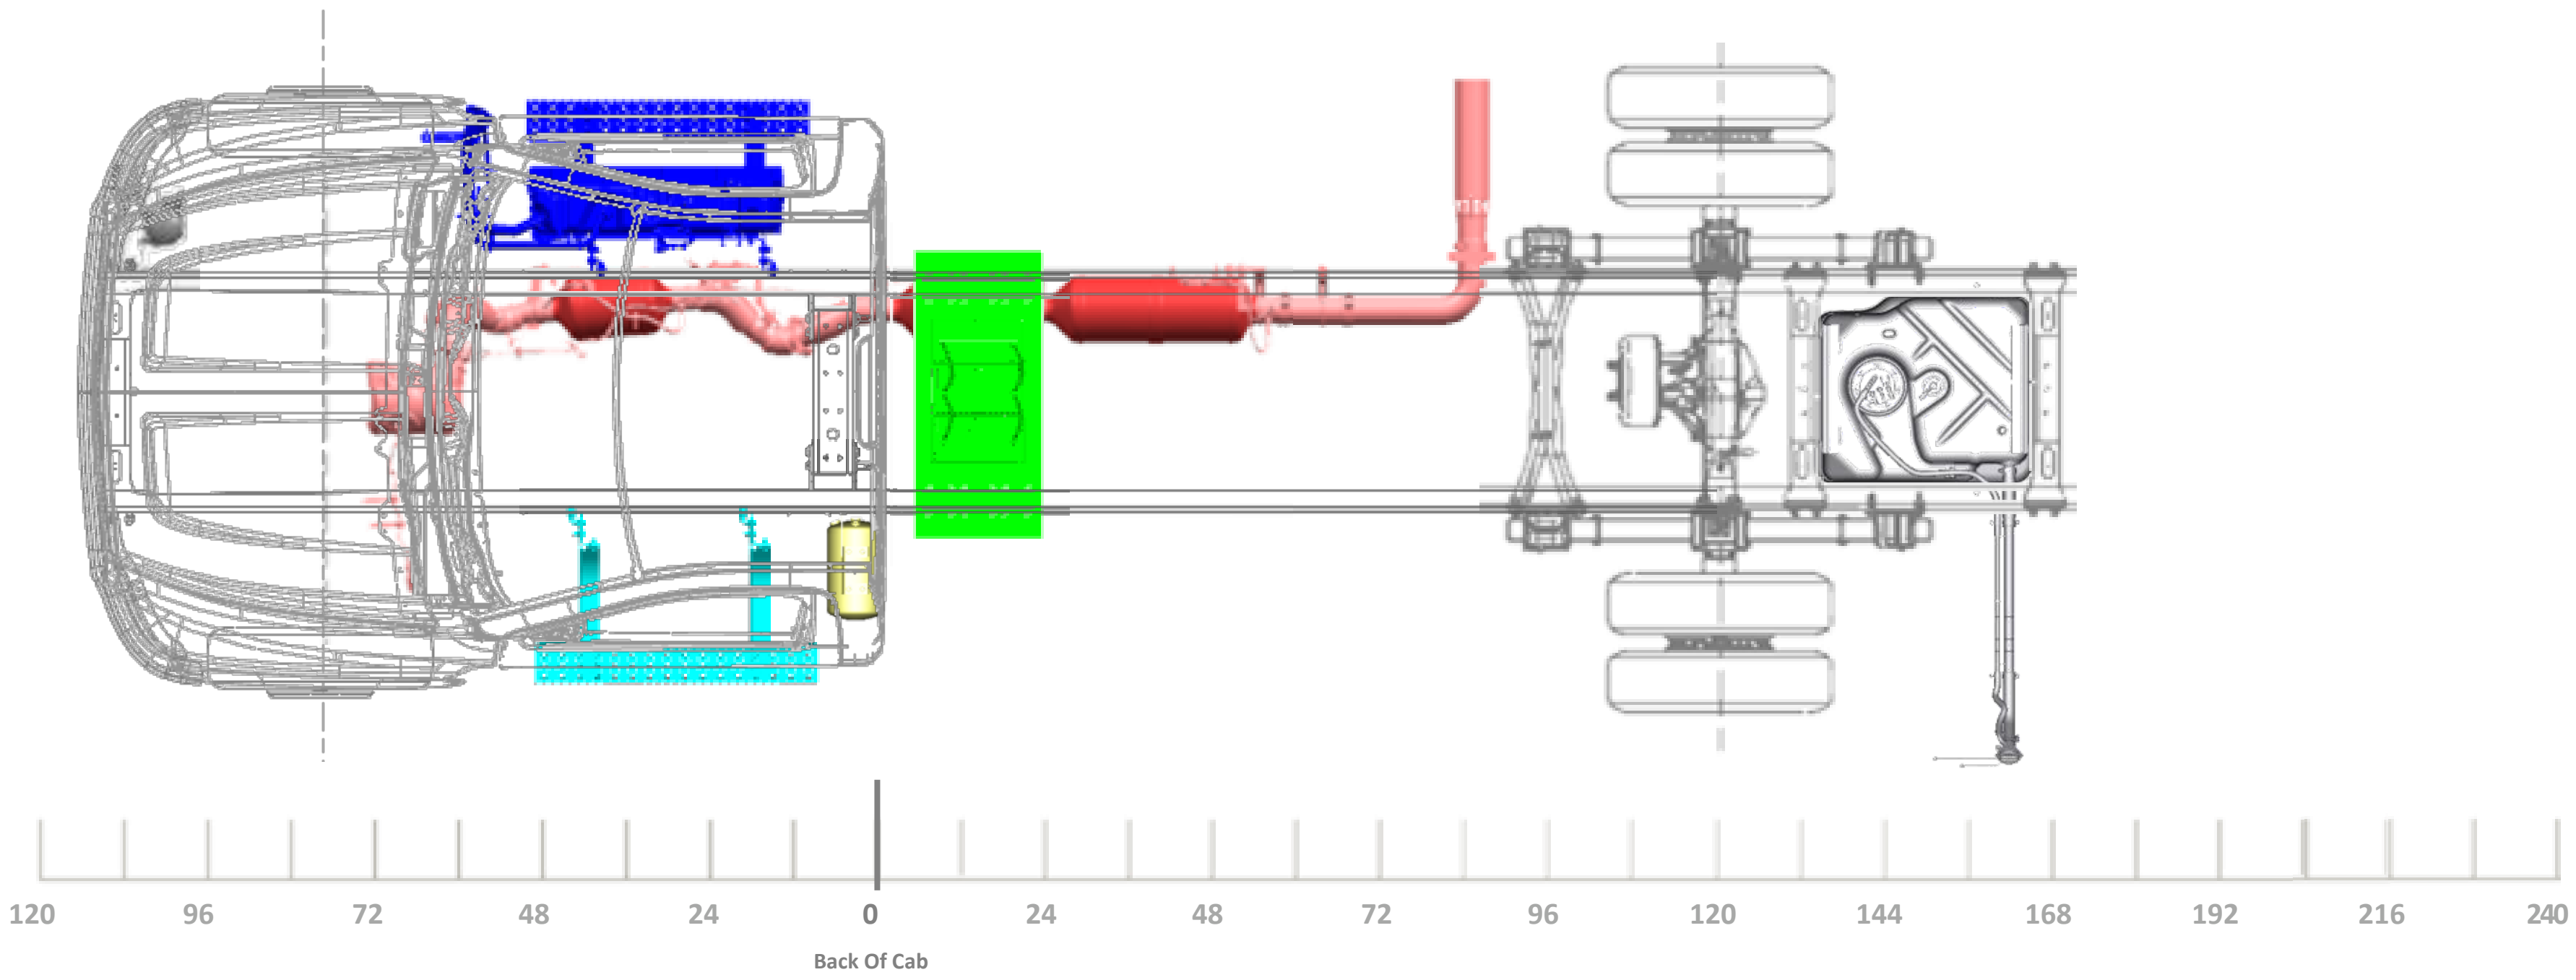
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

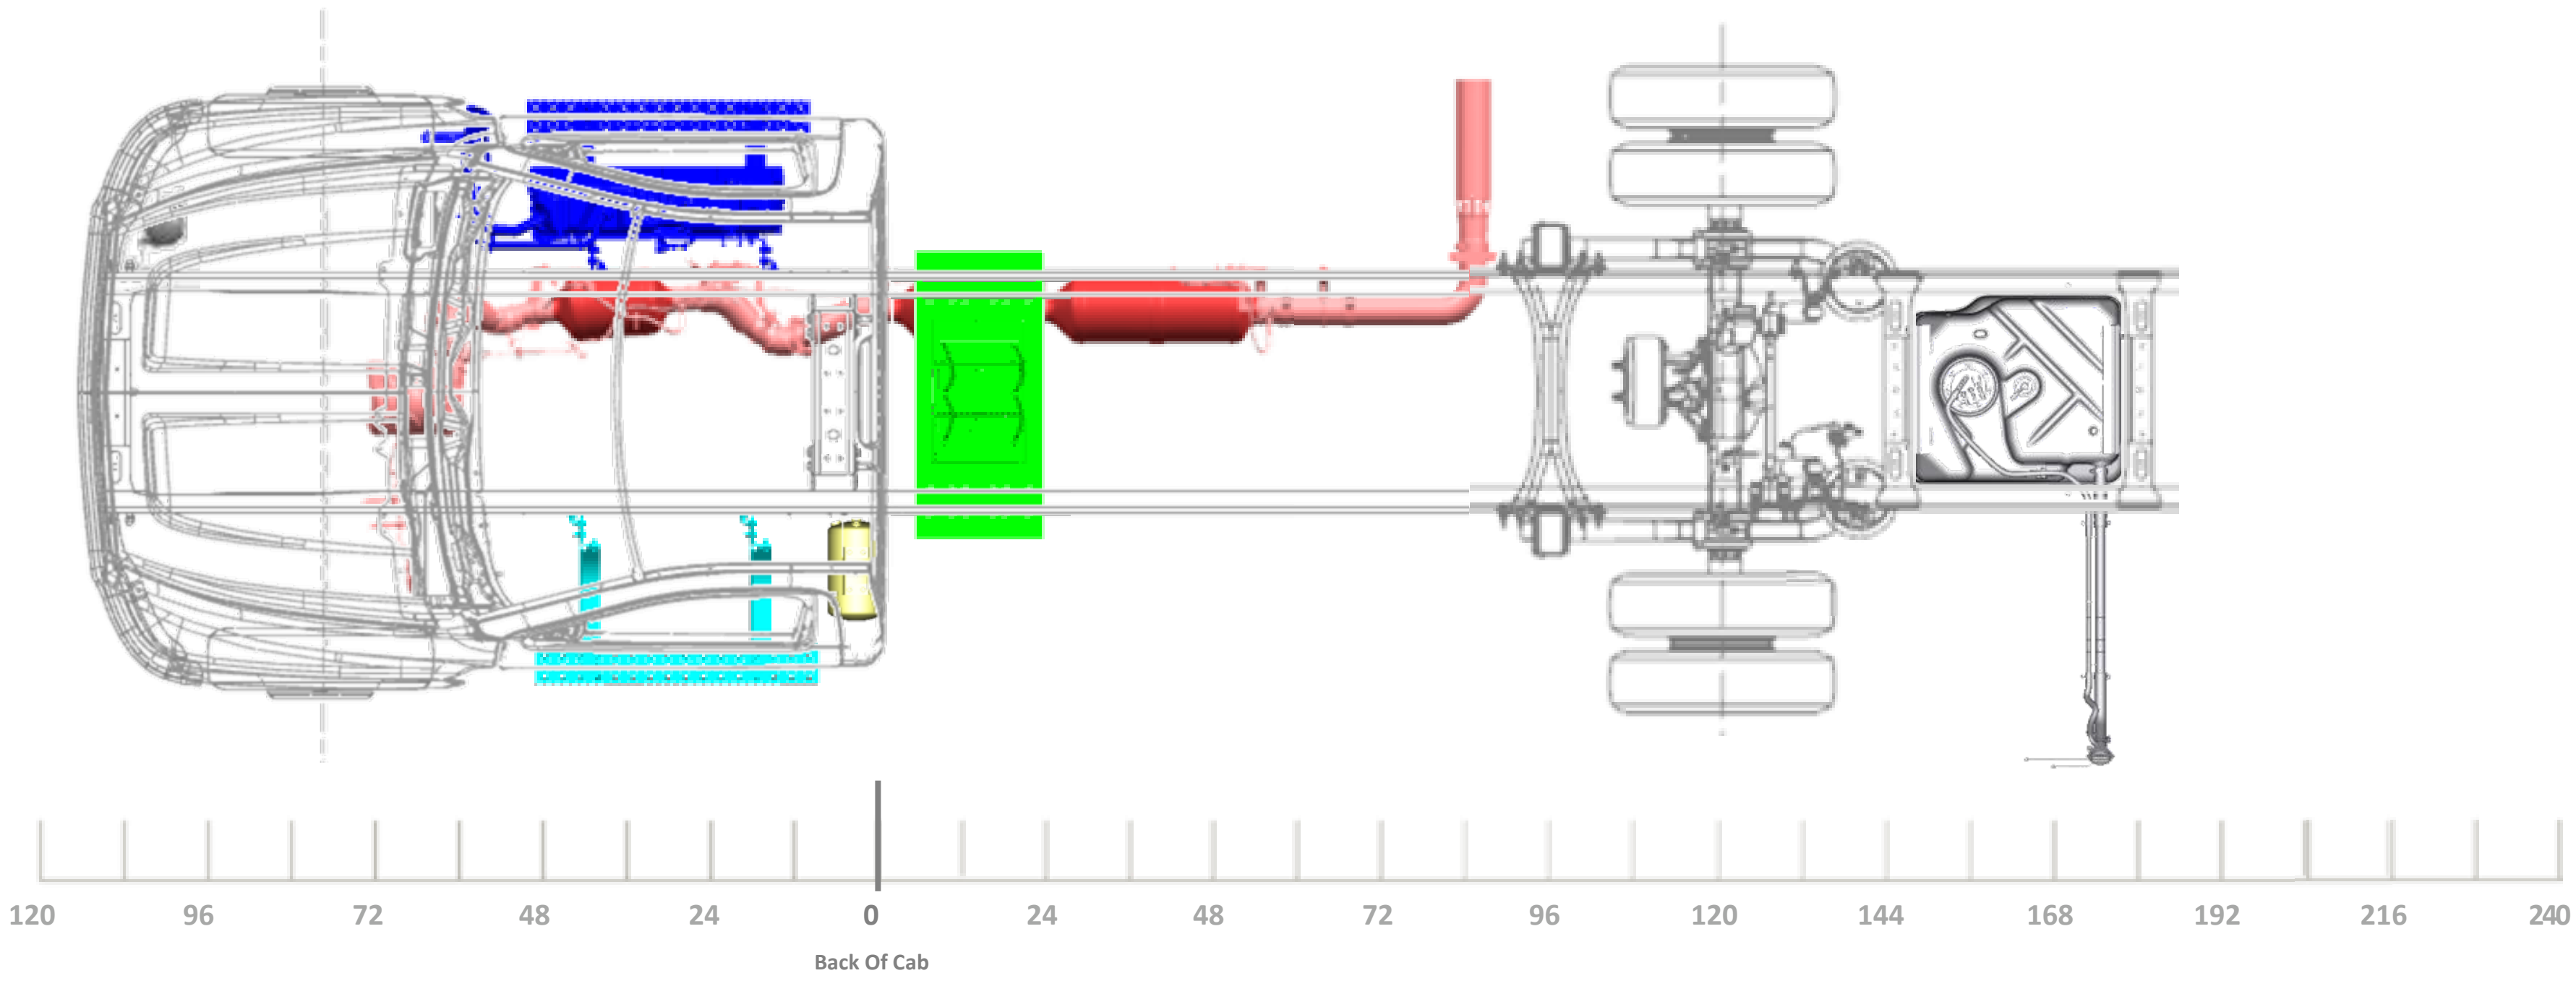
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION VARI-RATE REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

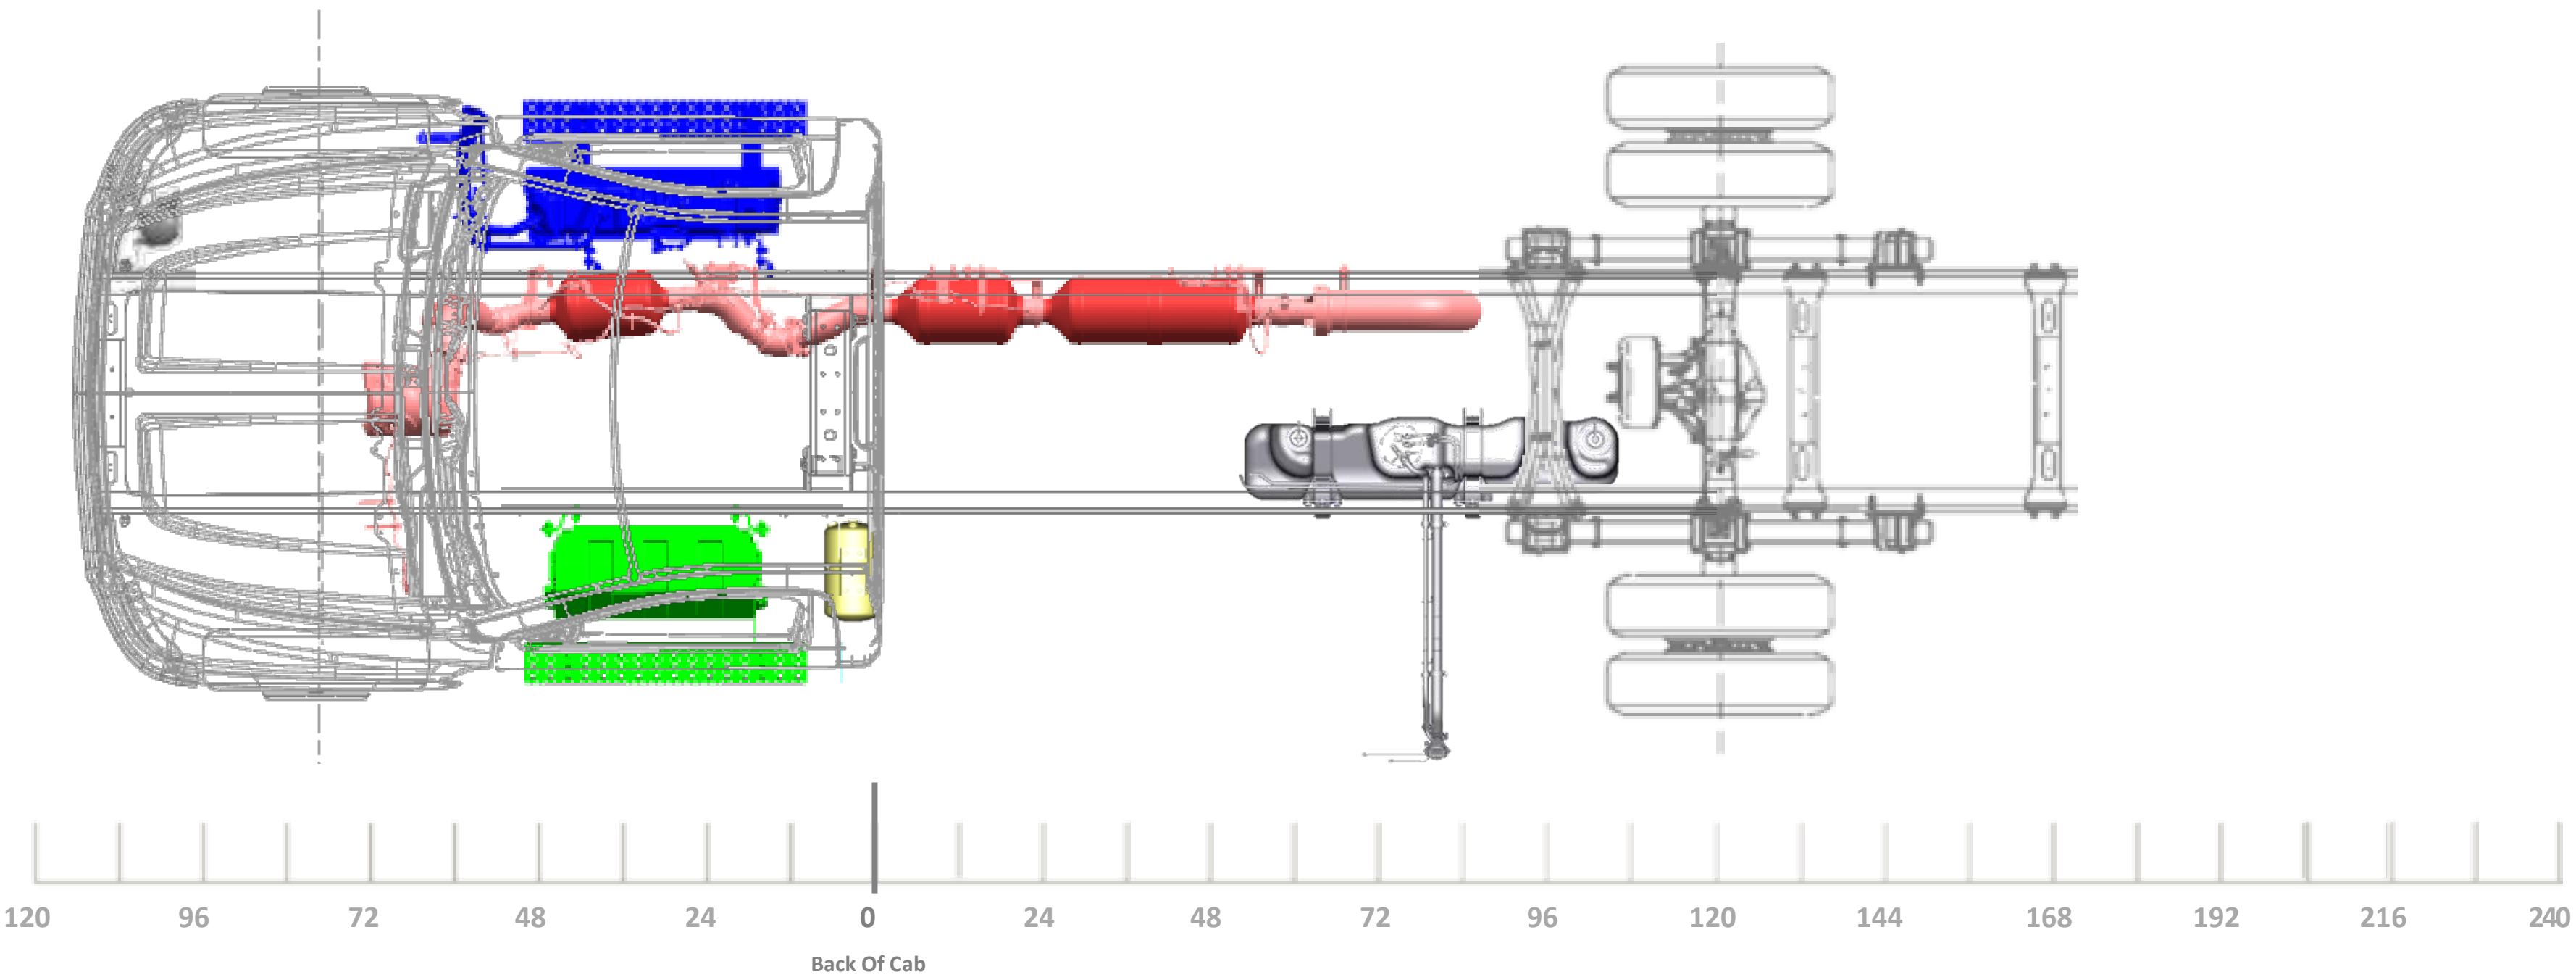
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

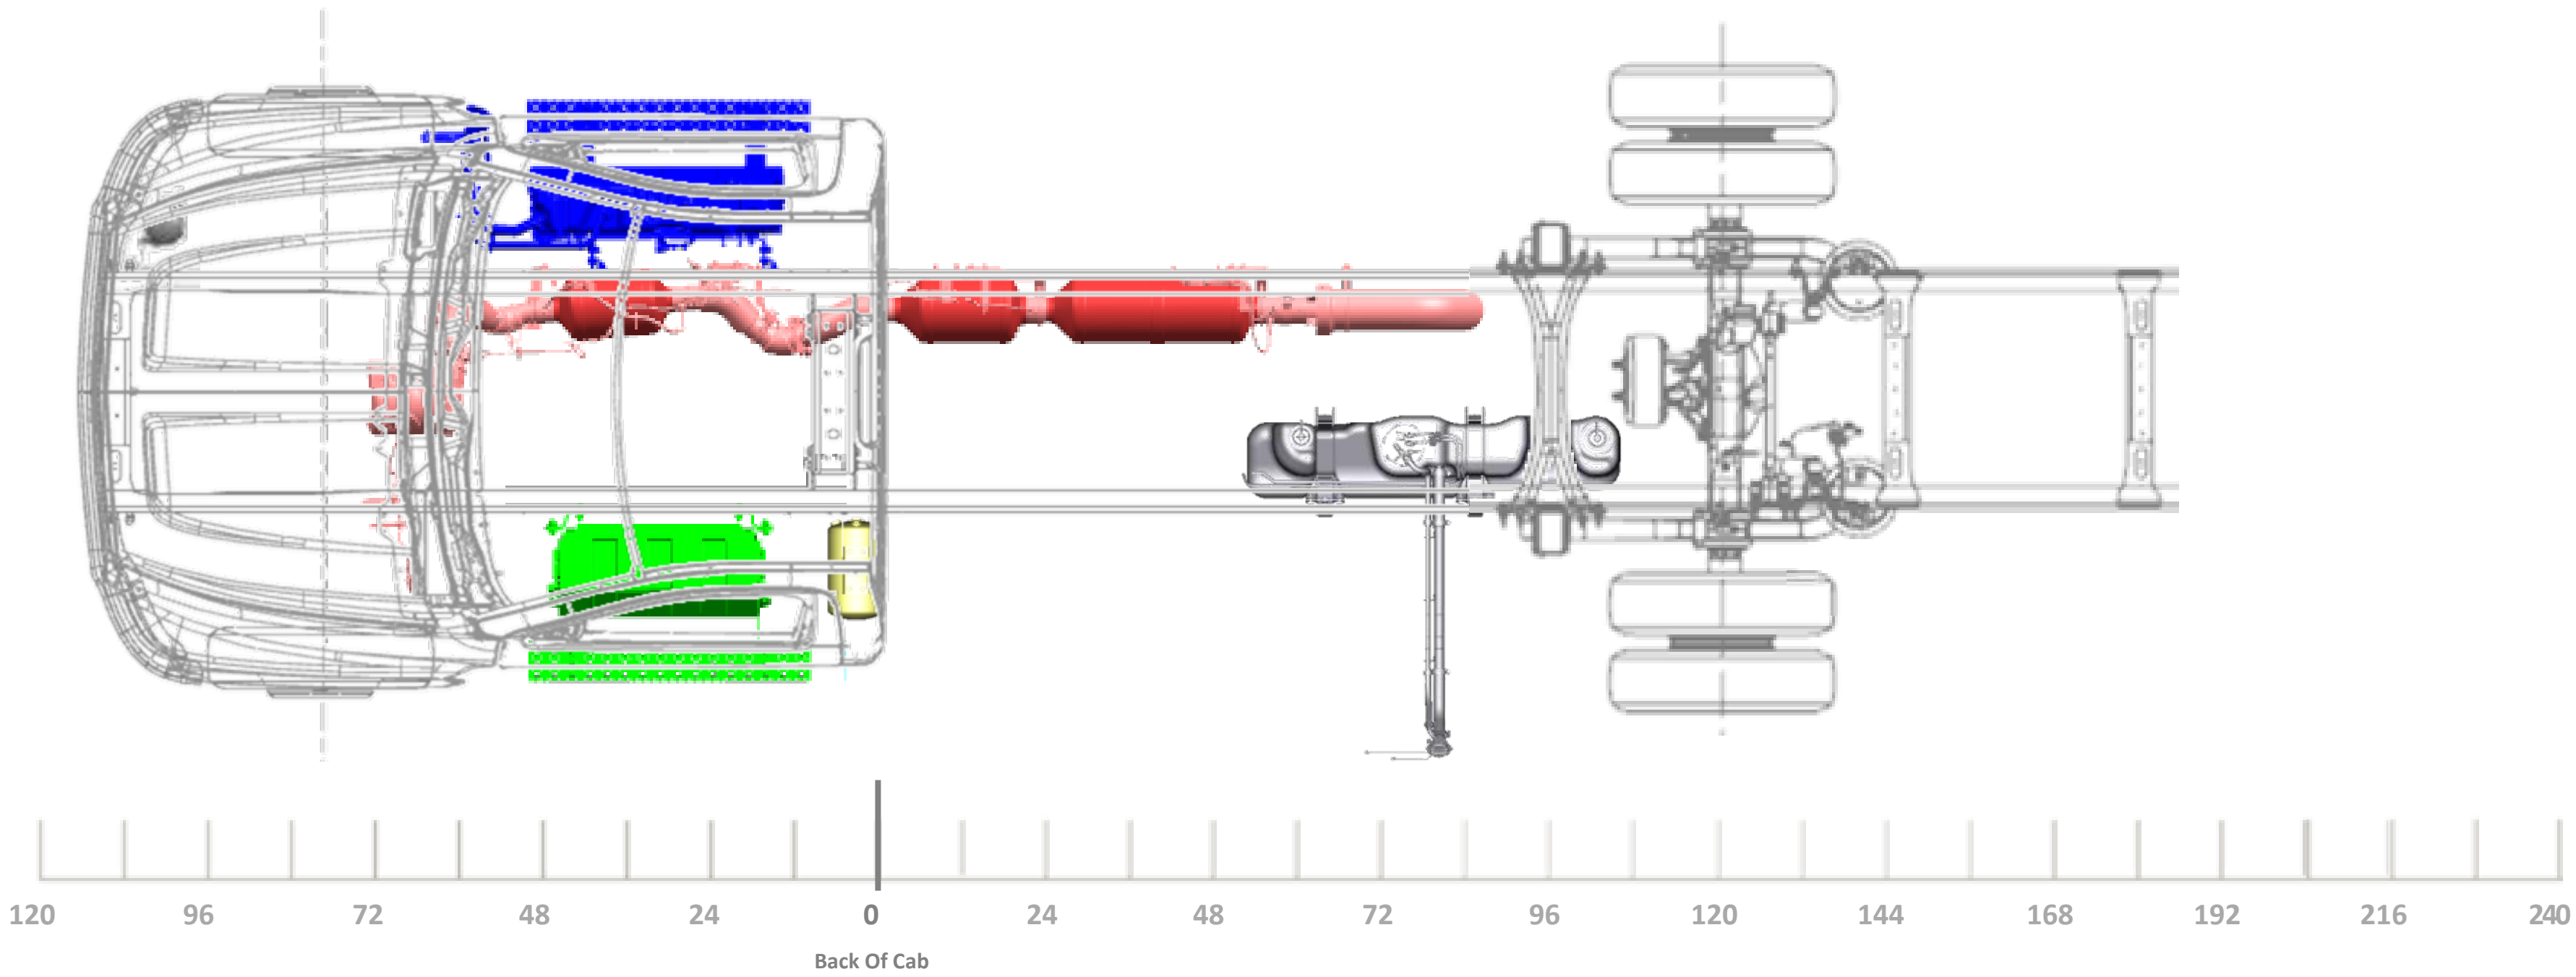
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

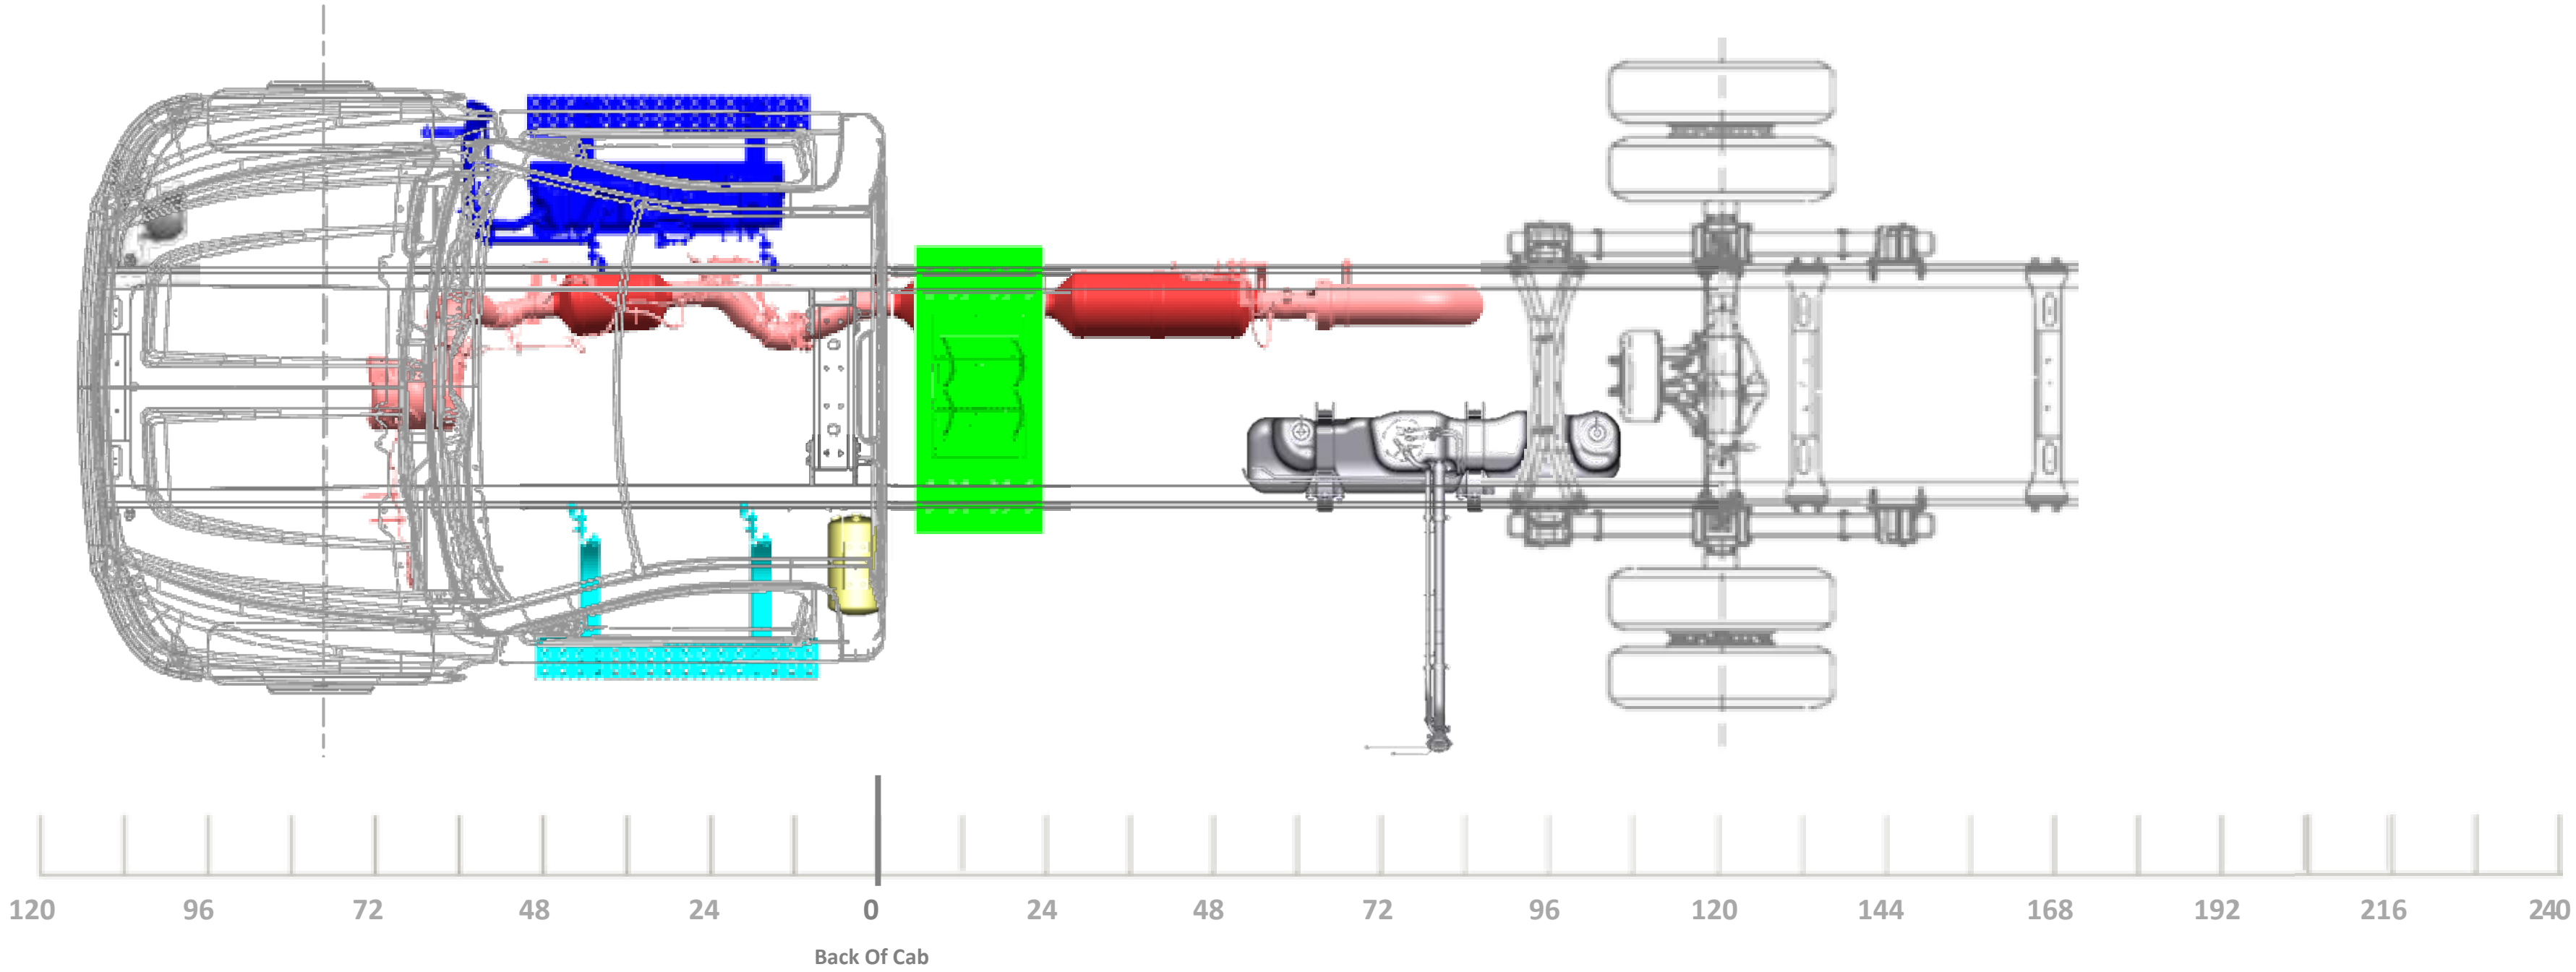
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

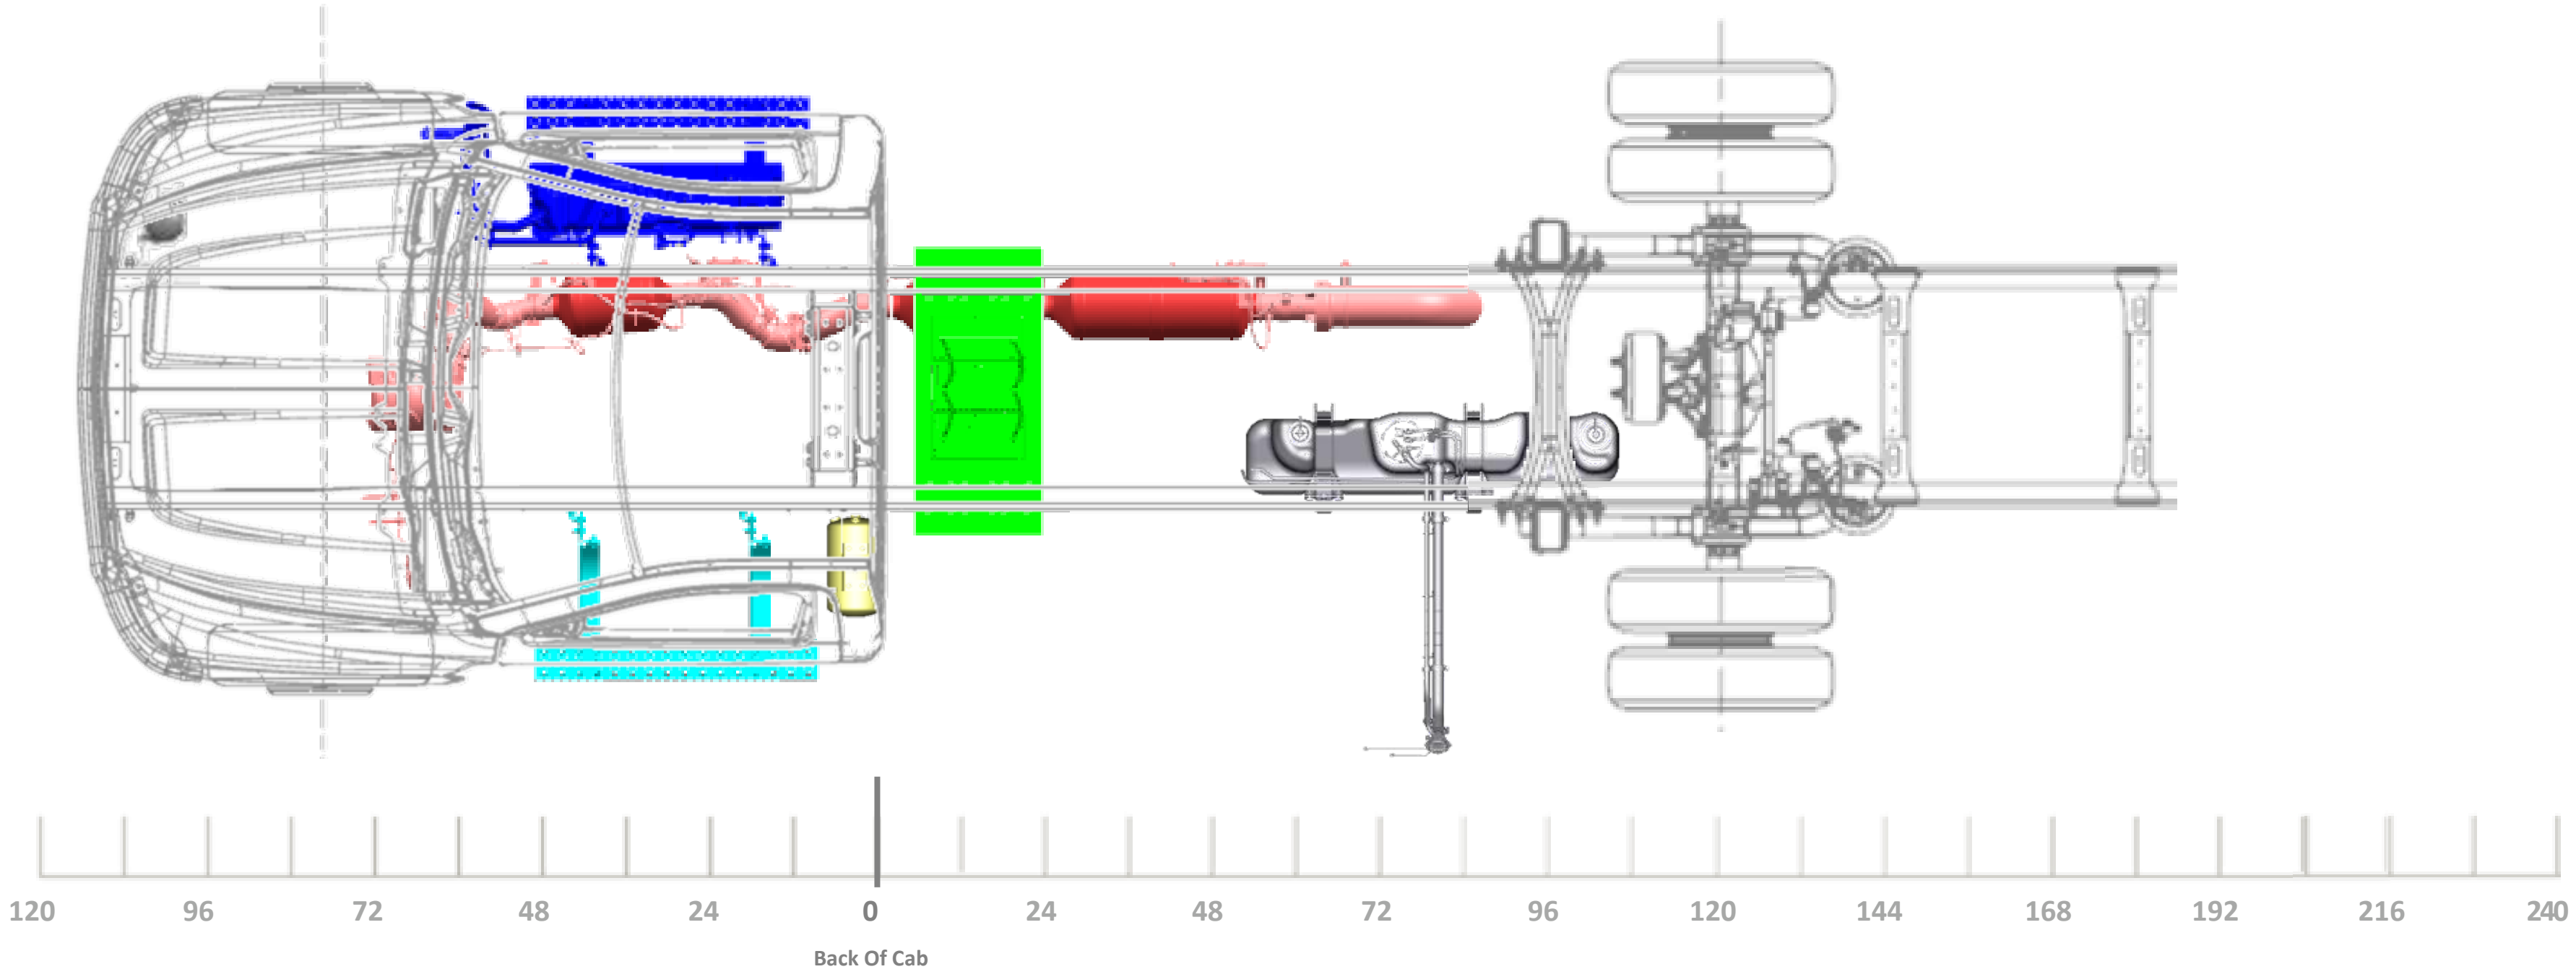
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

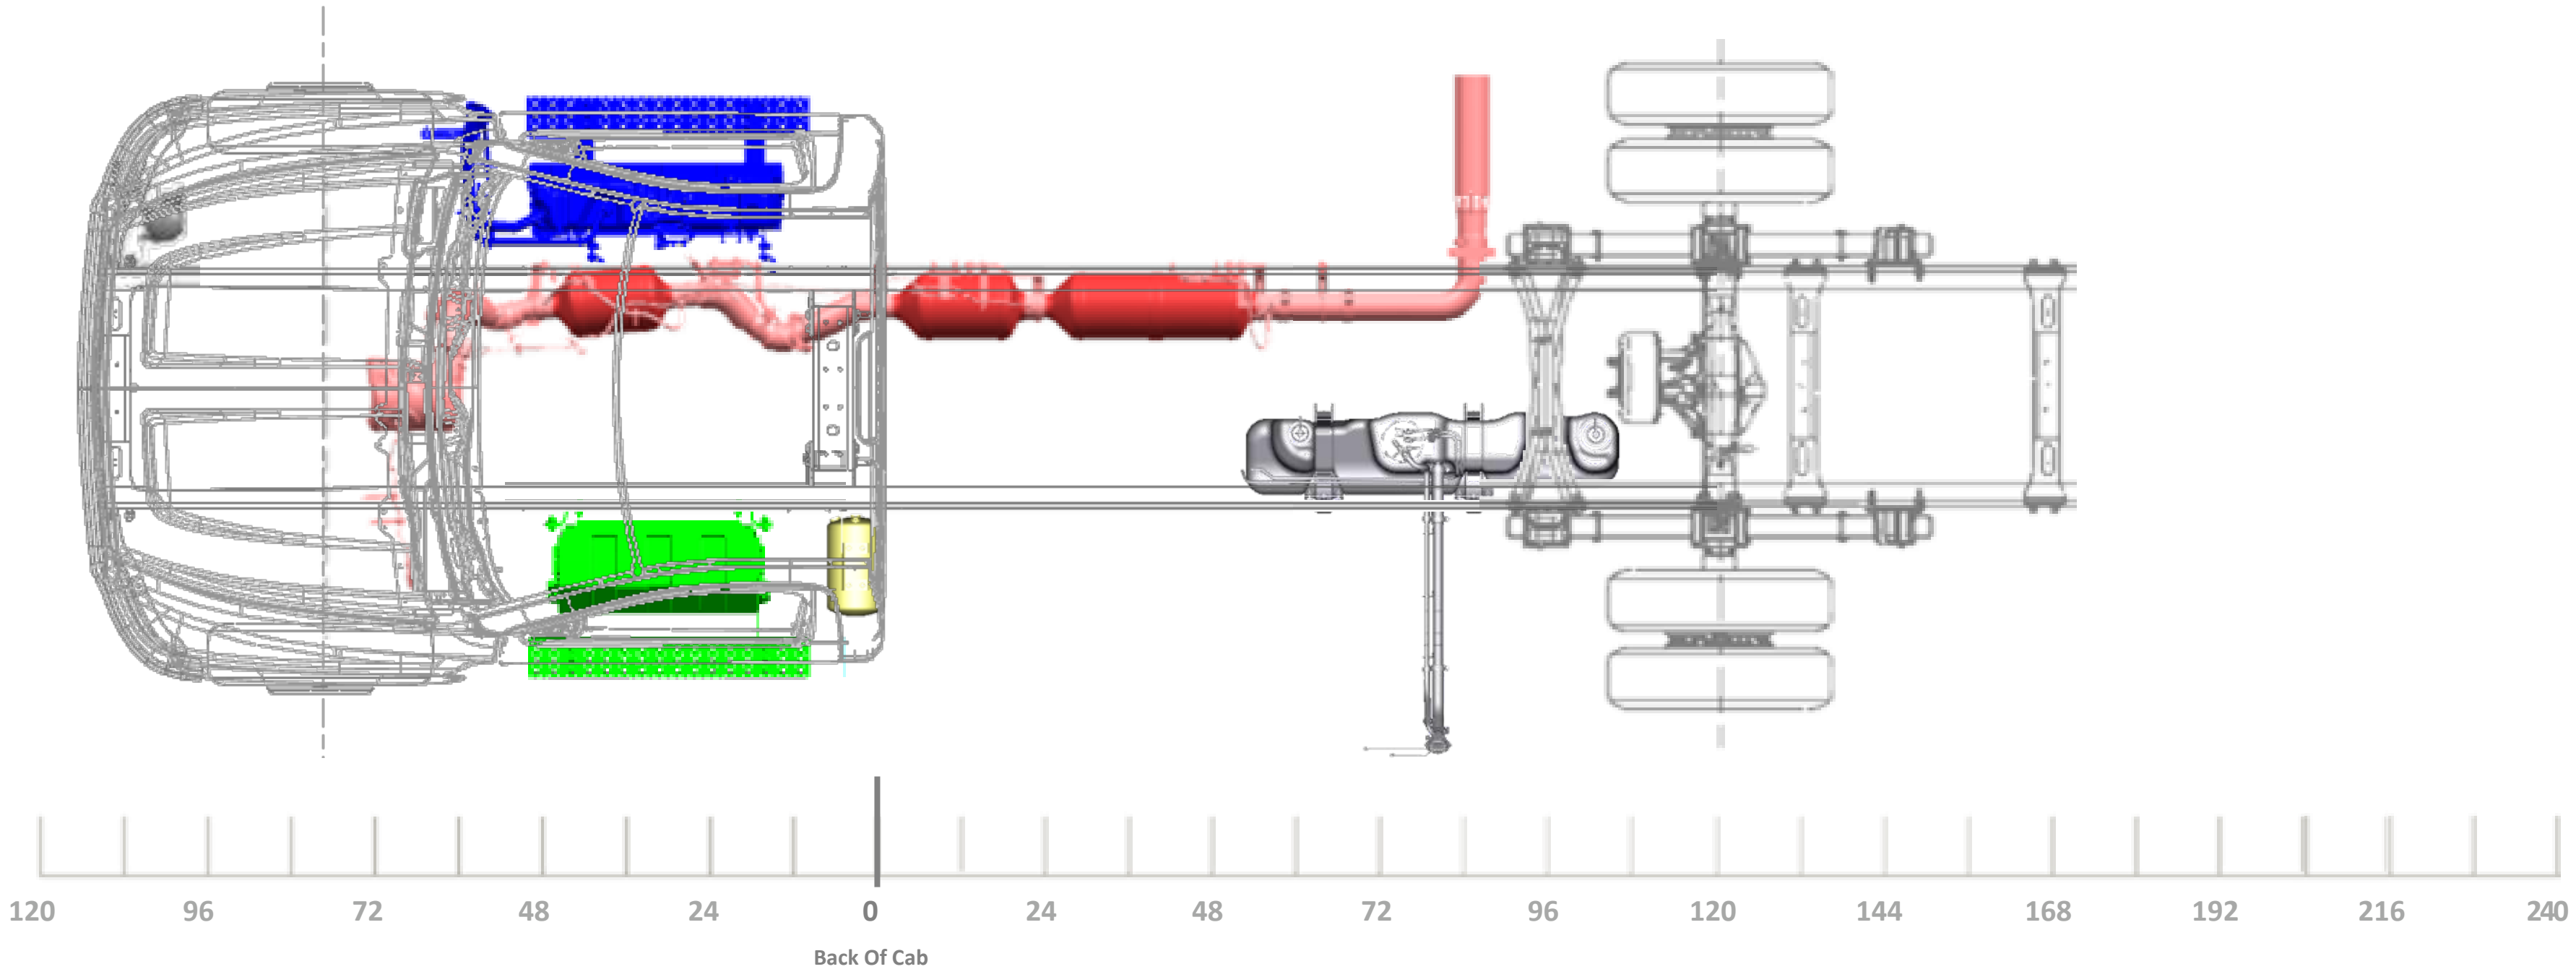
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

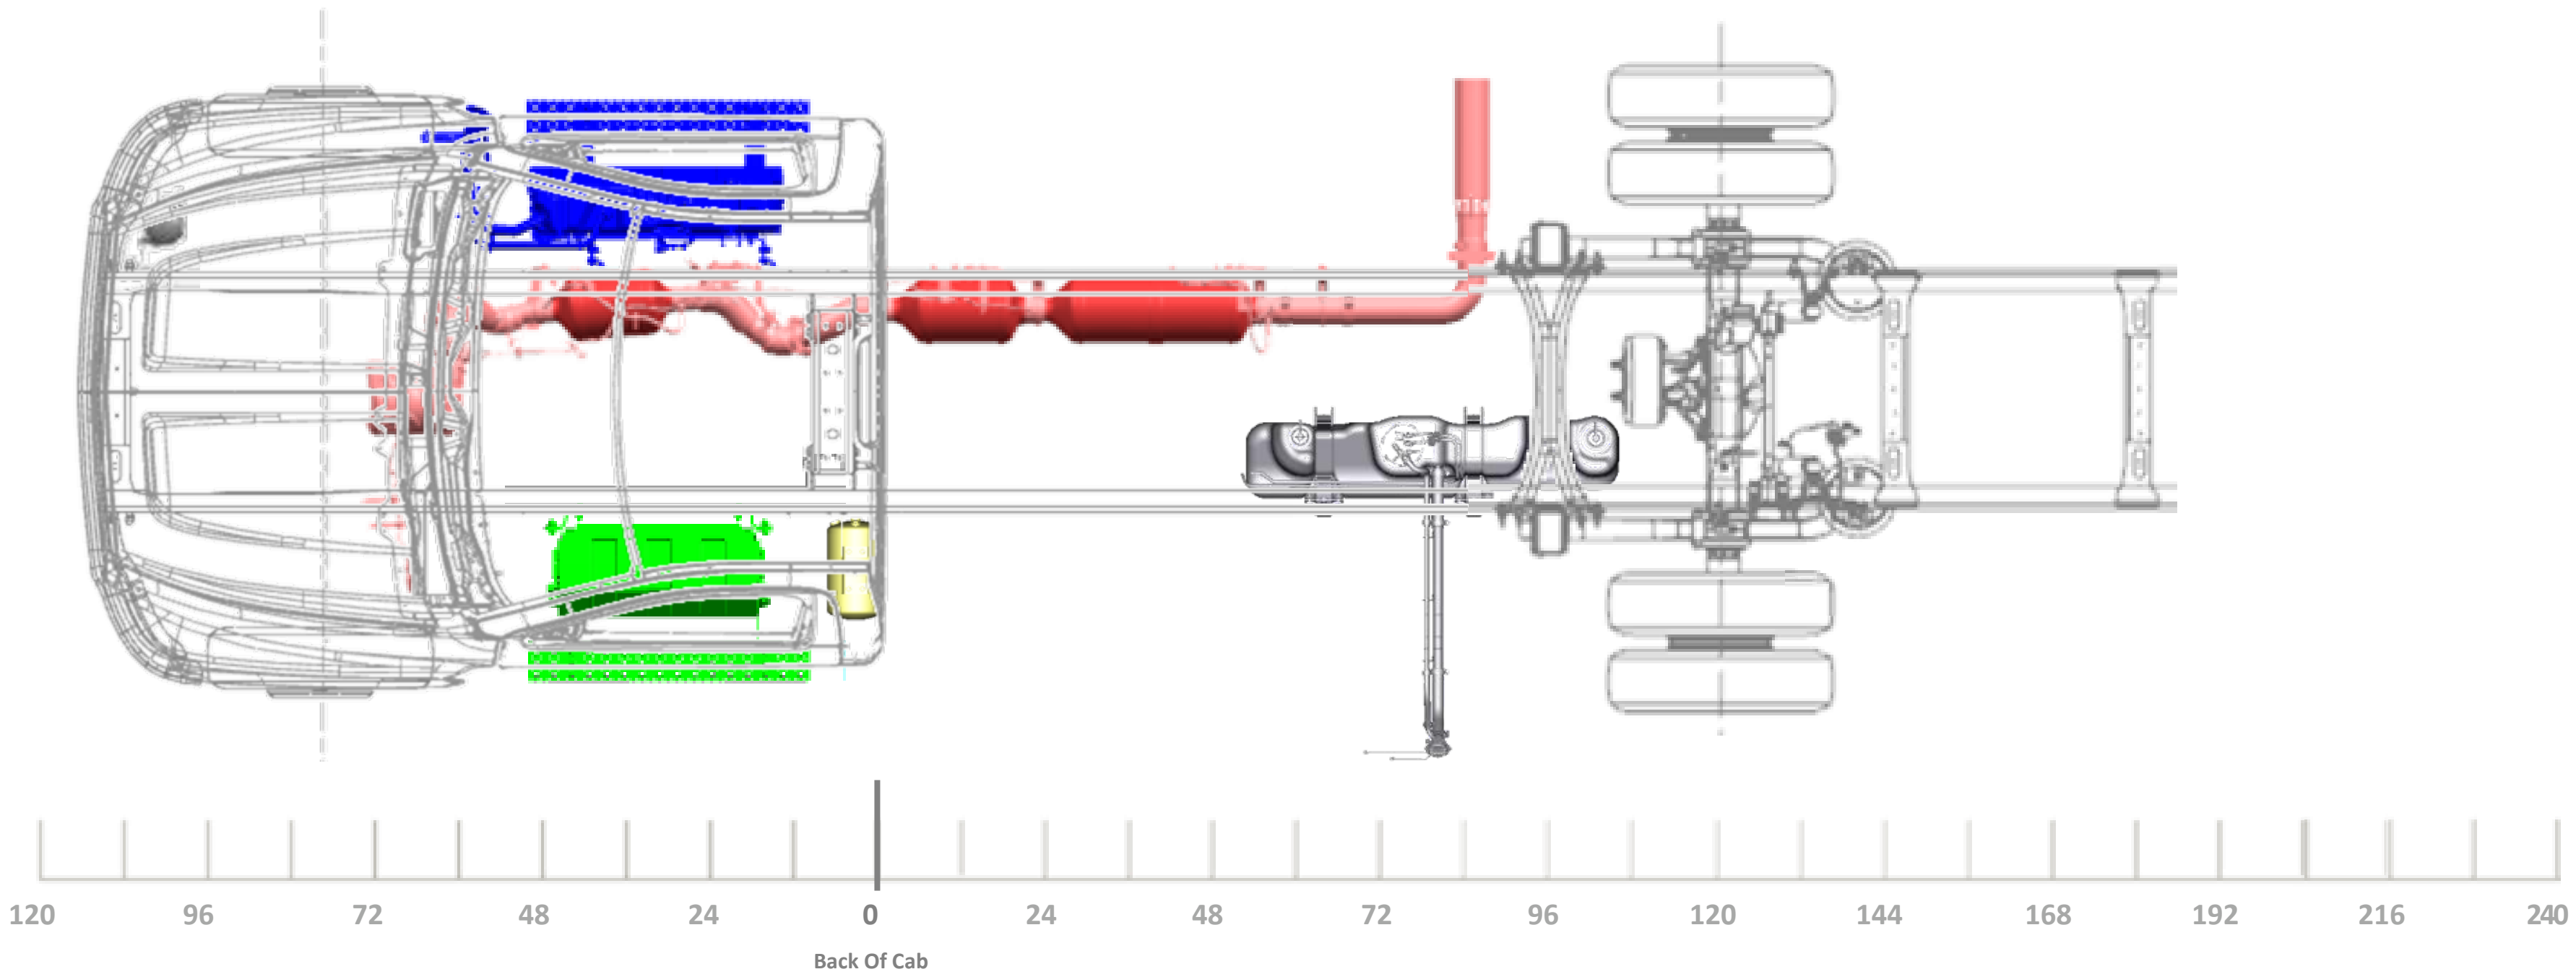

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

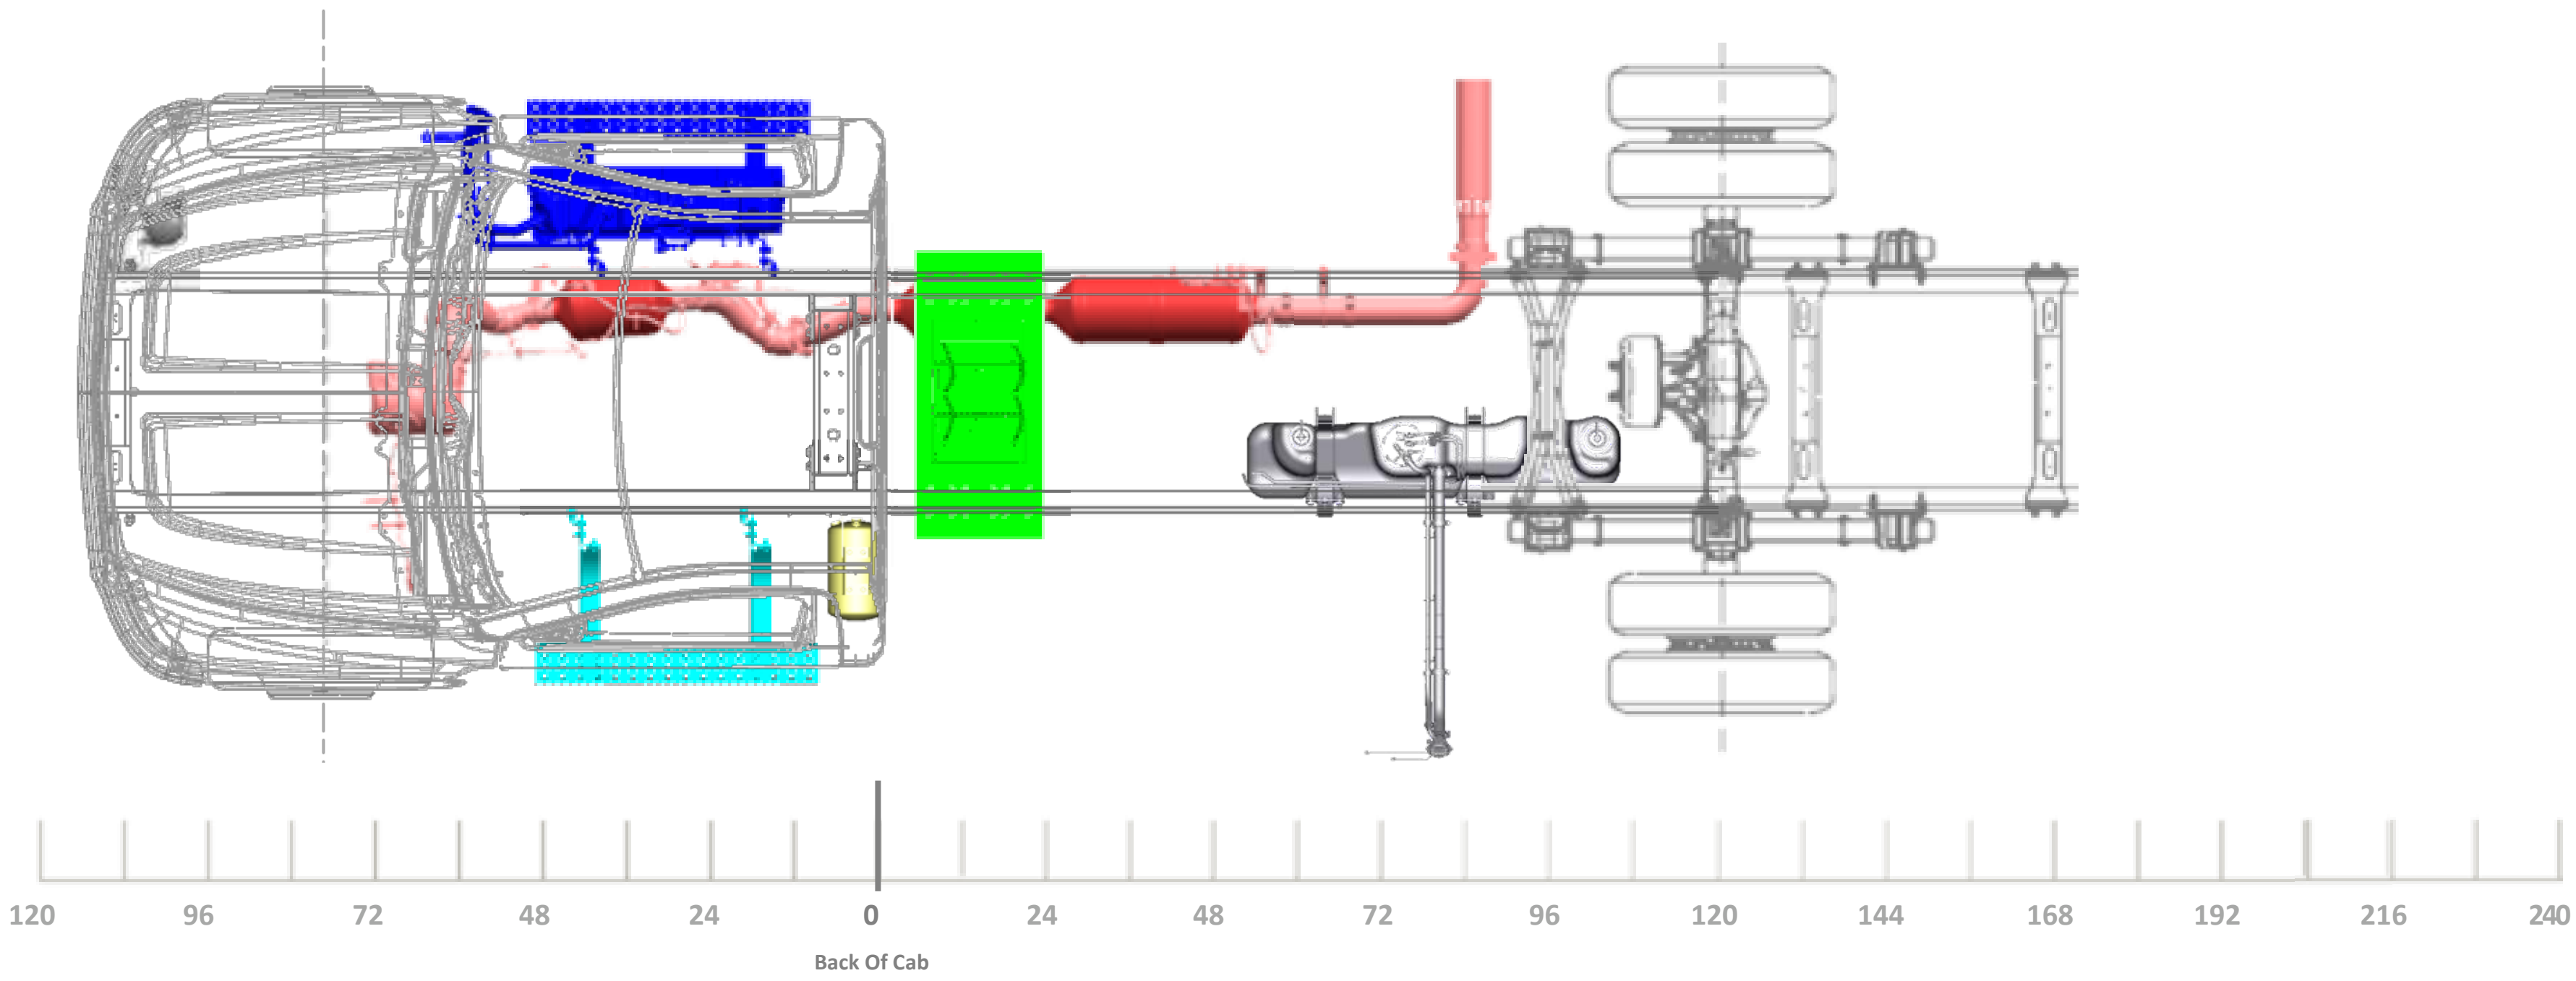
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

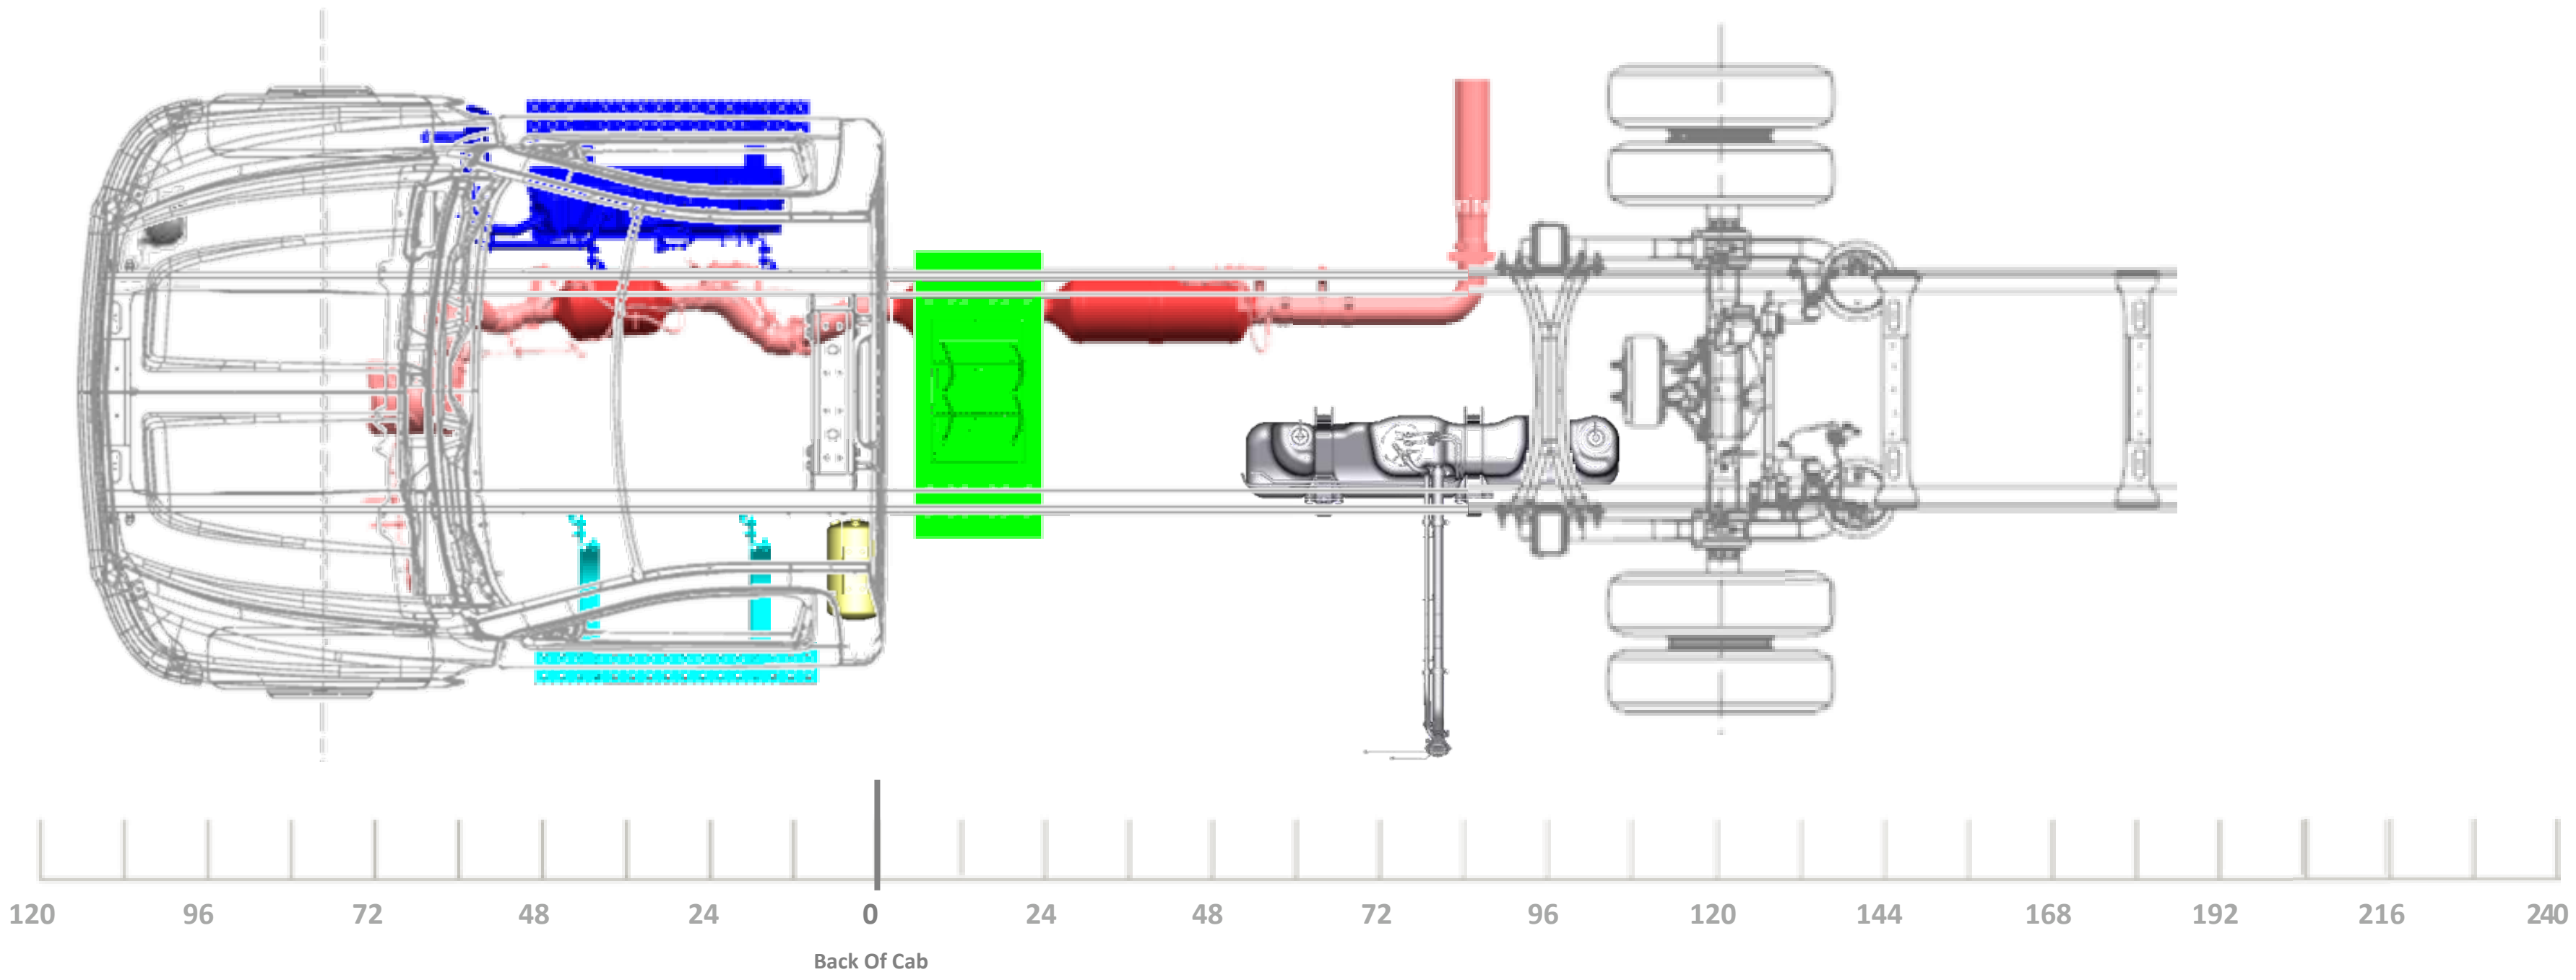
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

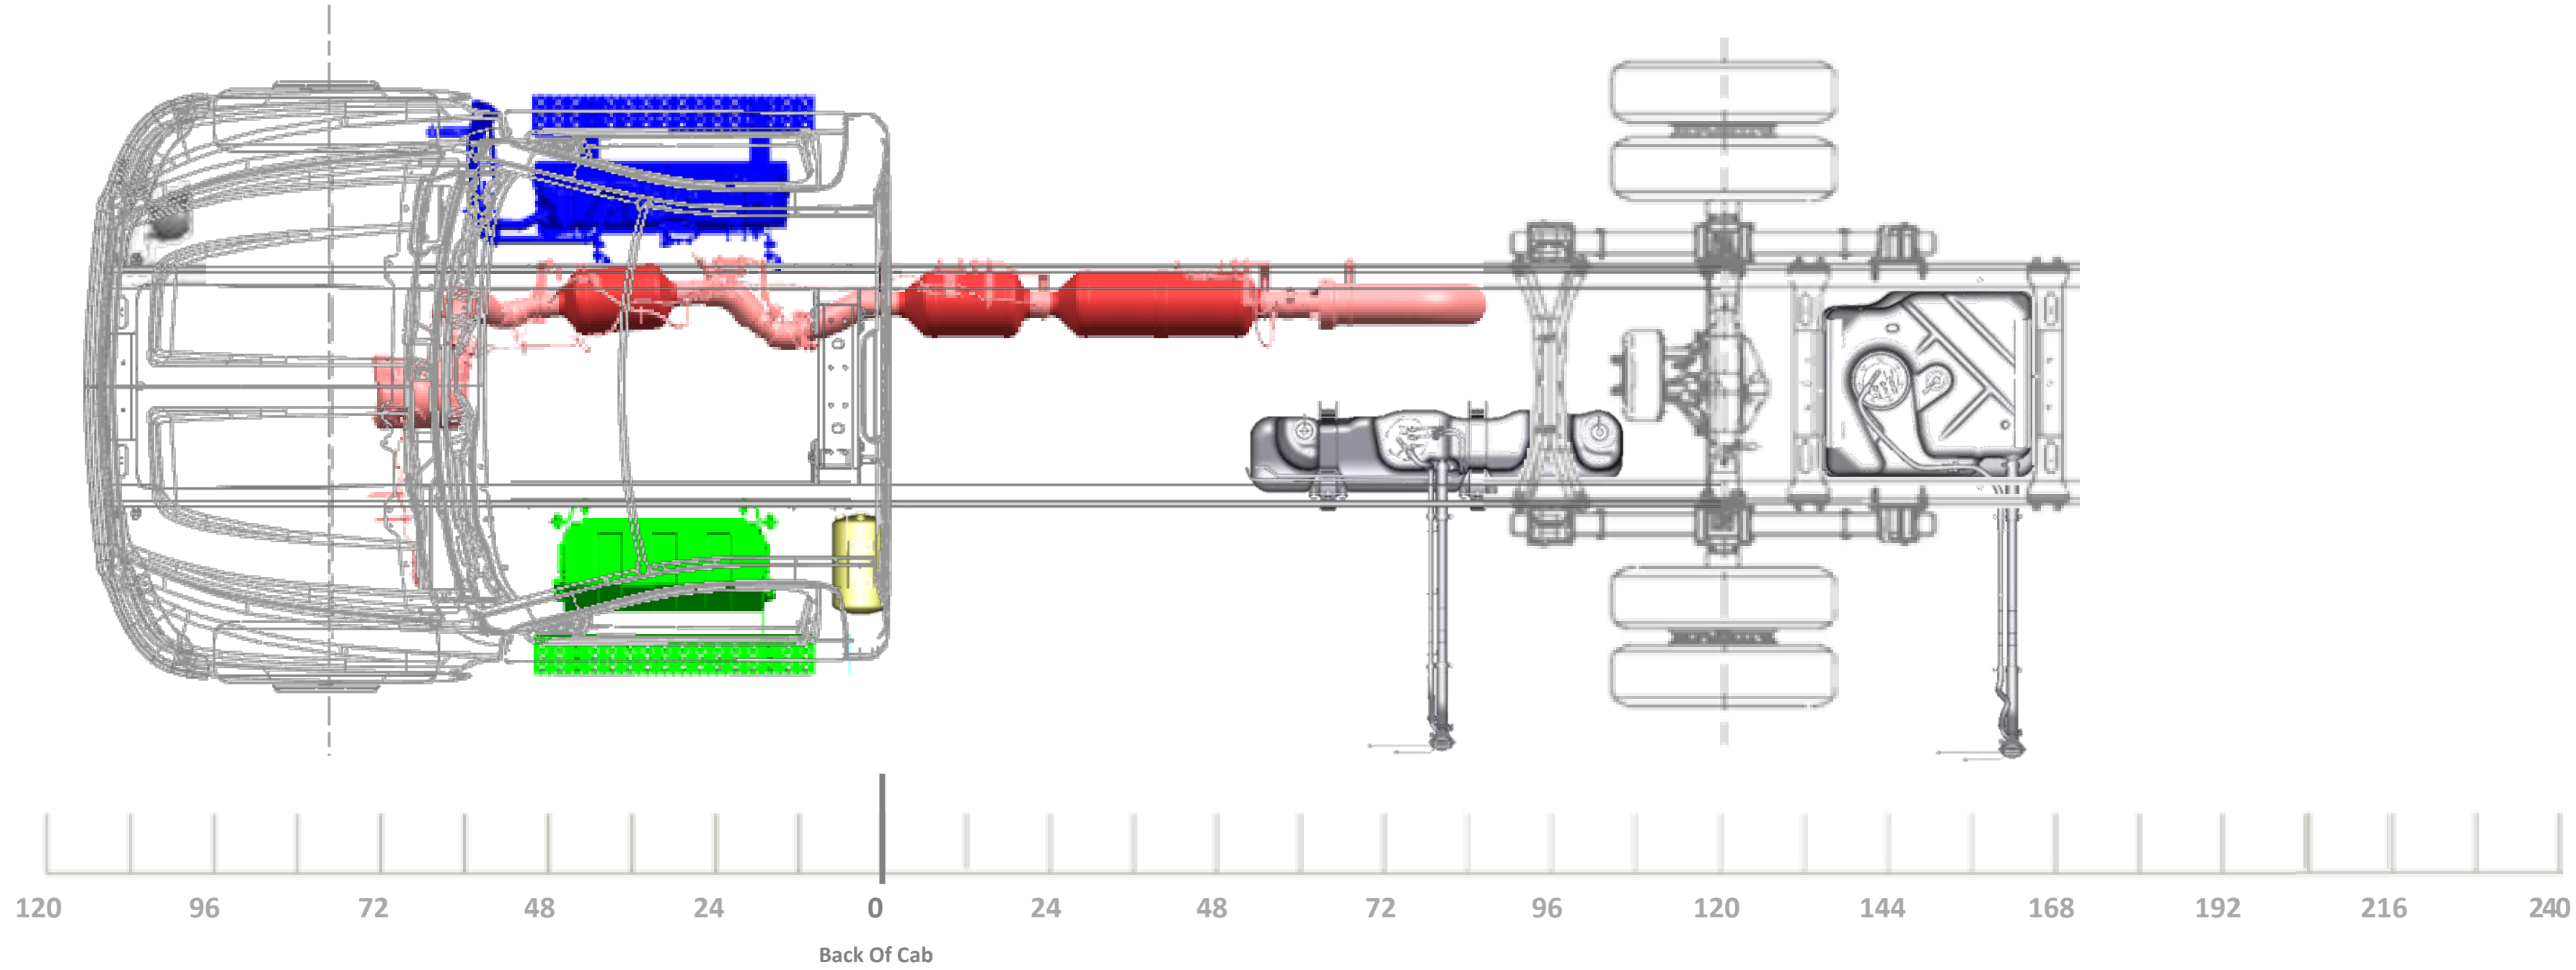
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

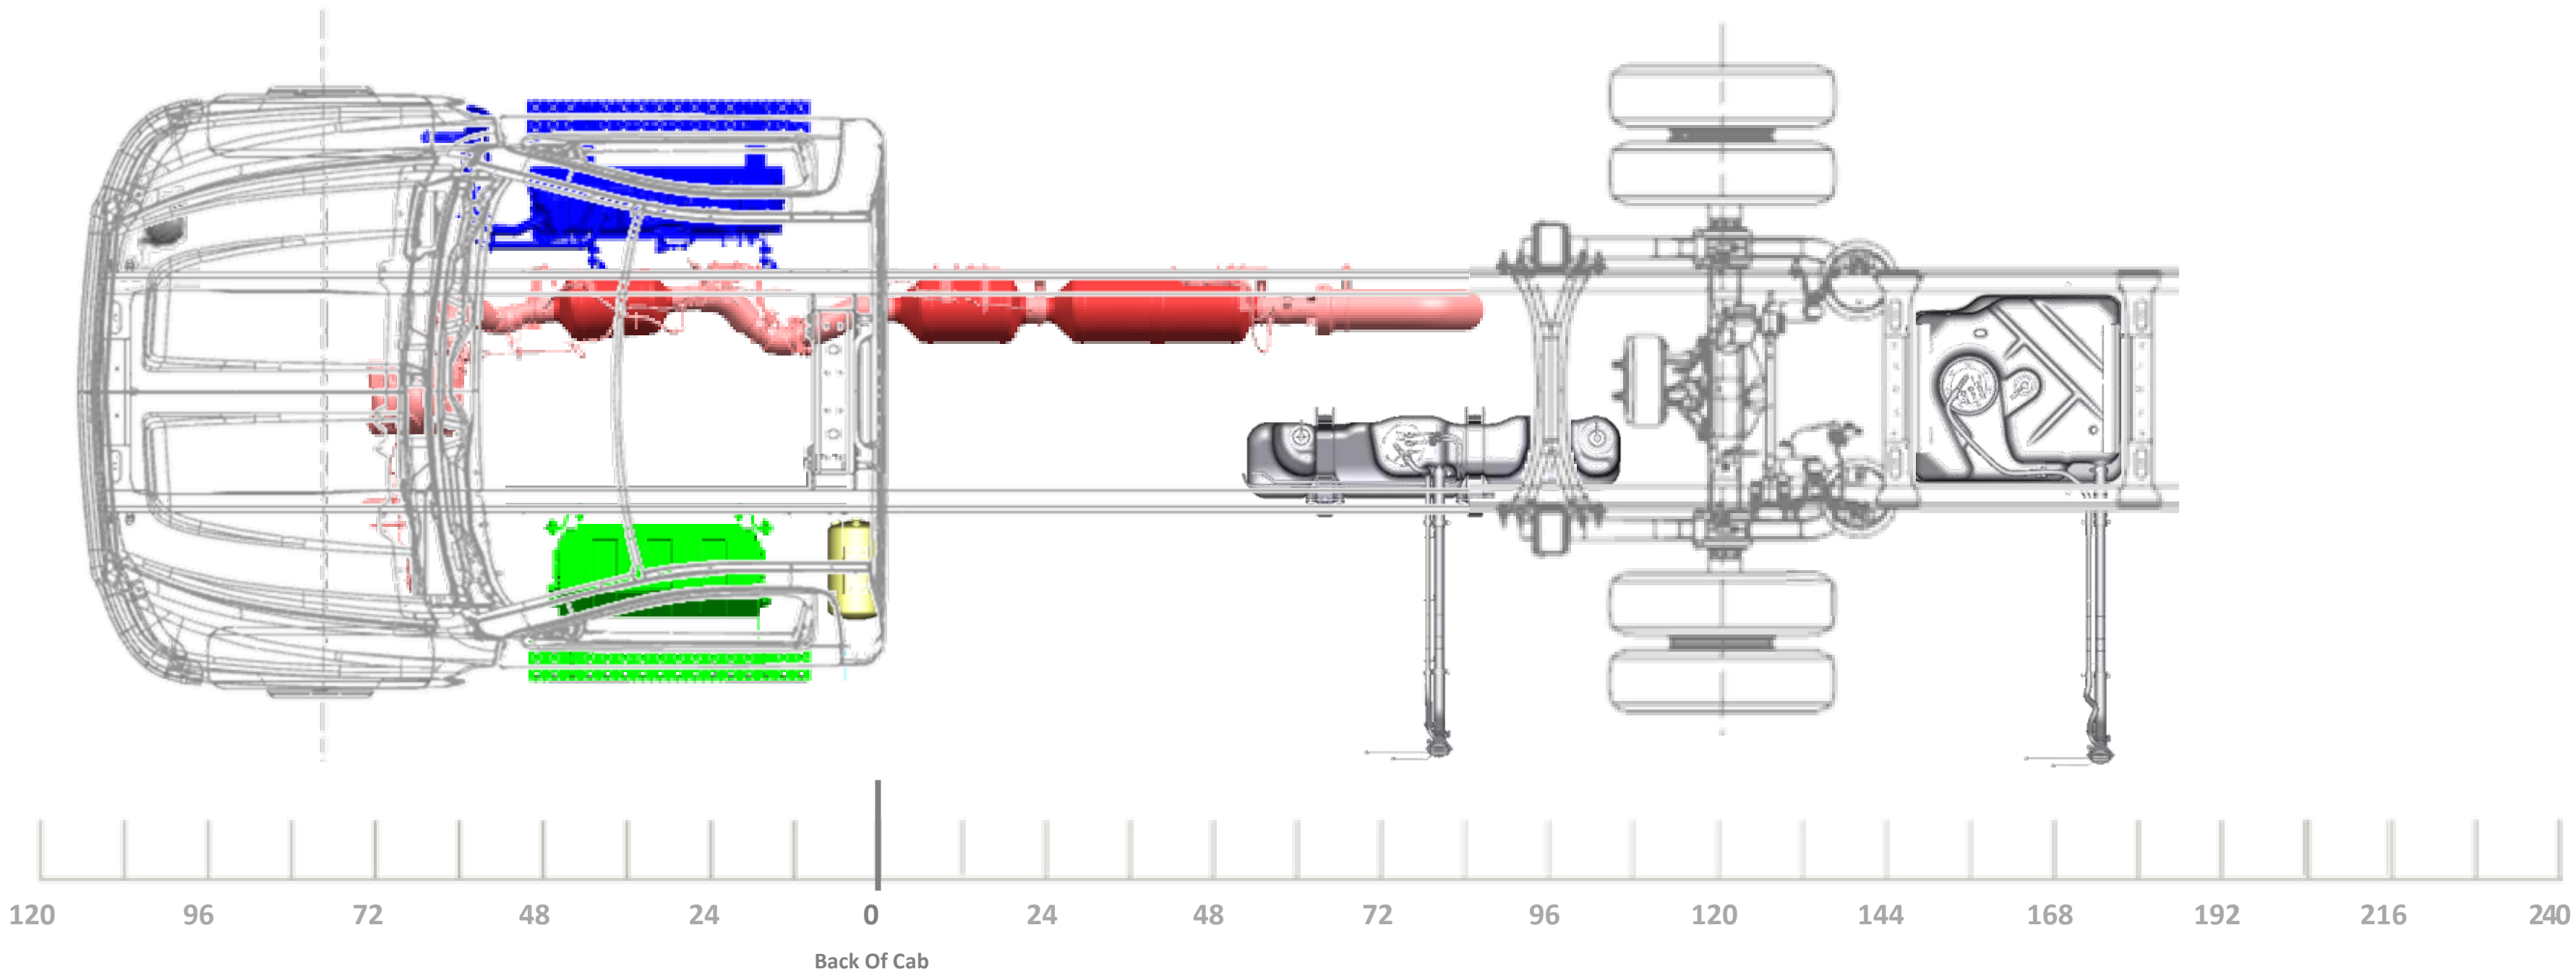
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

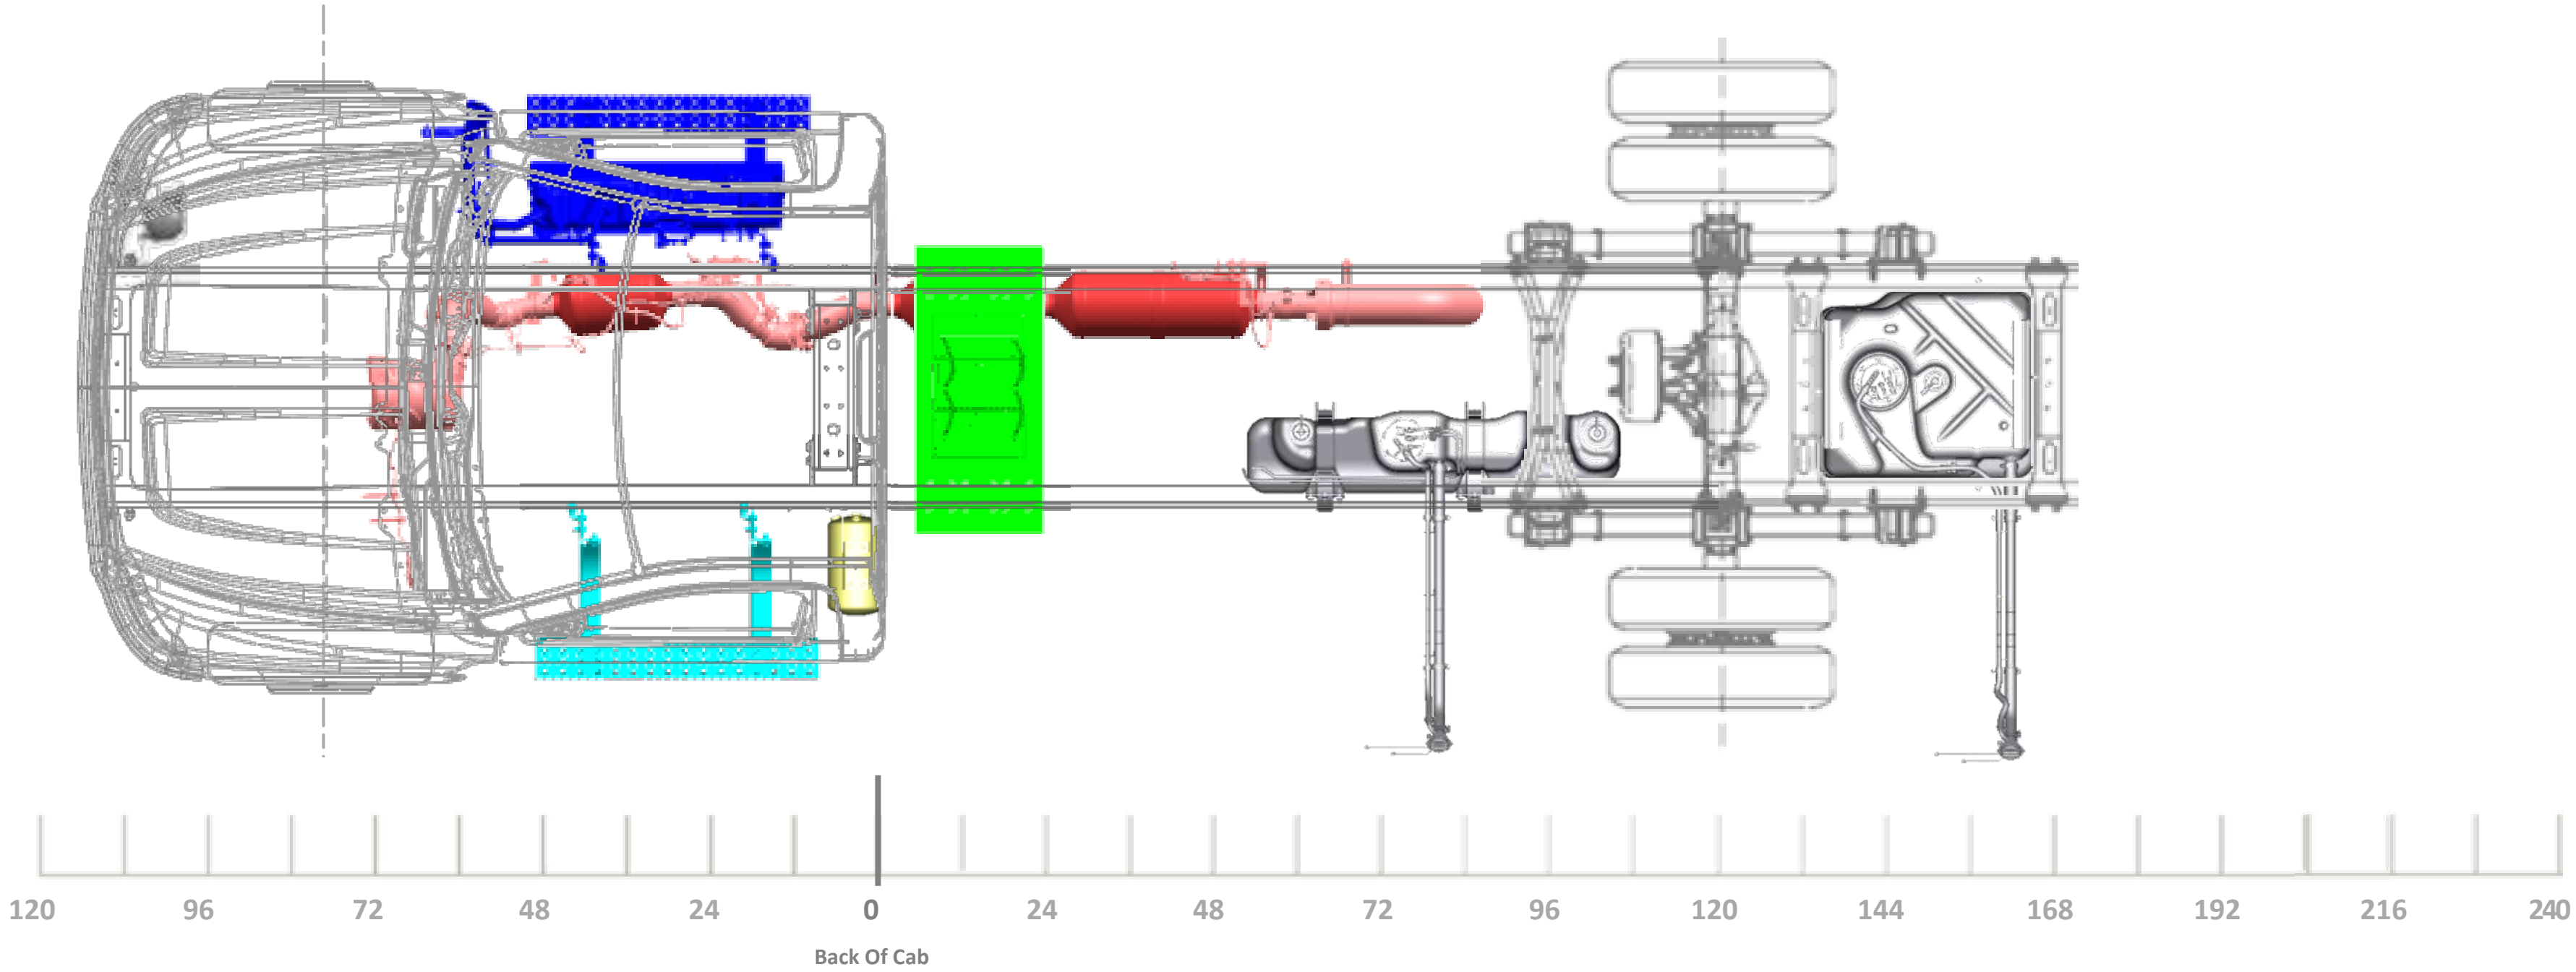
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

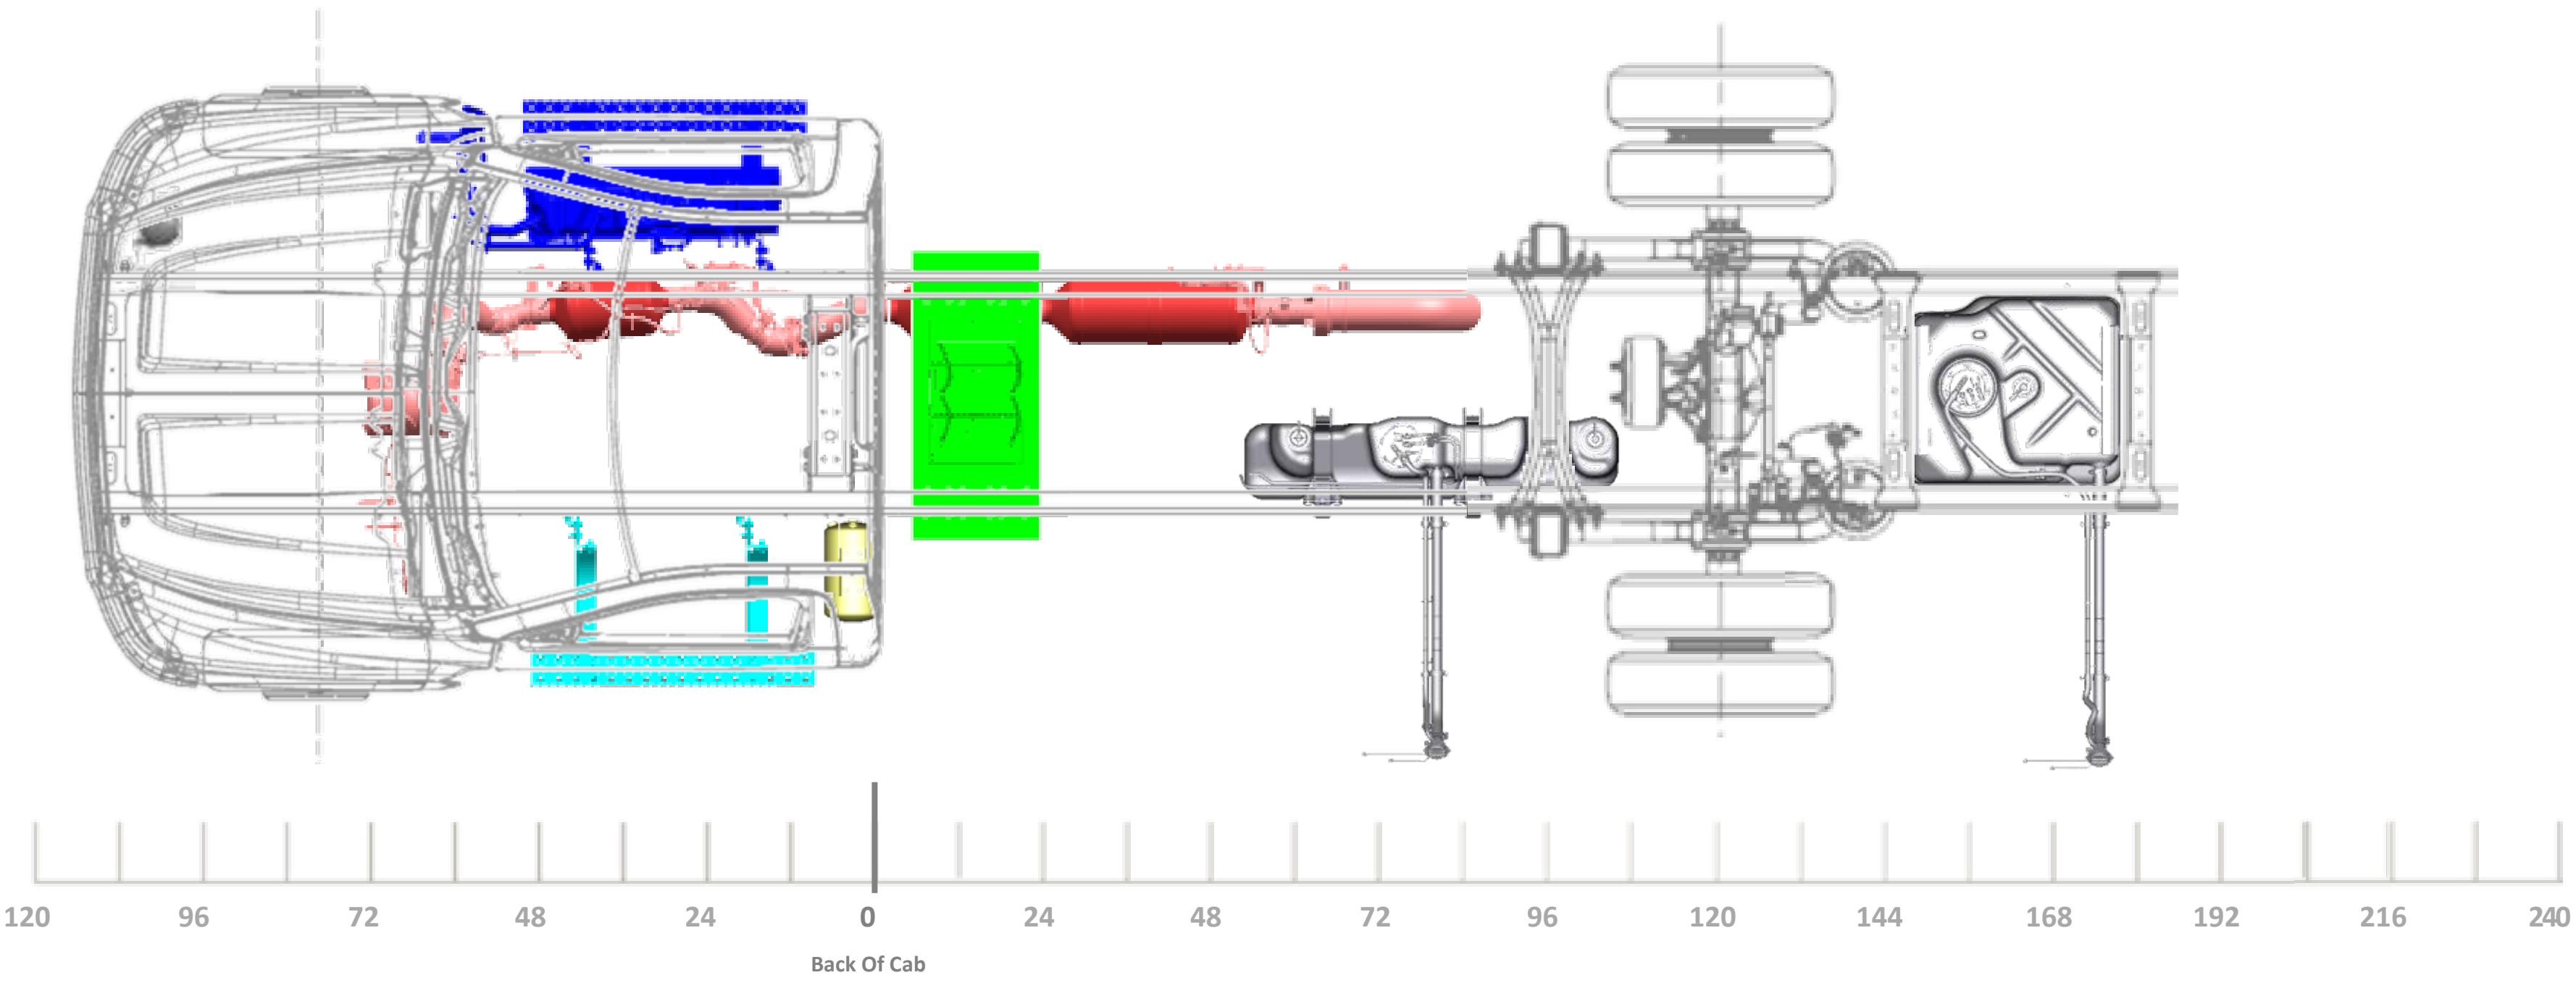
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

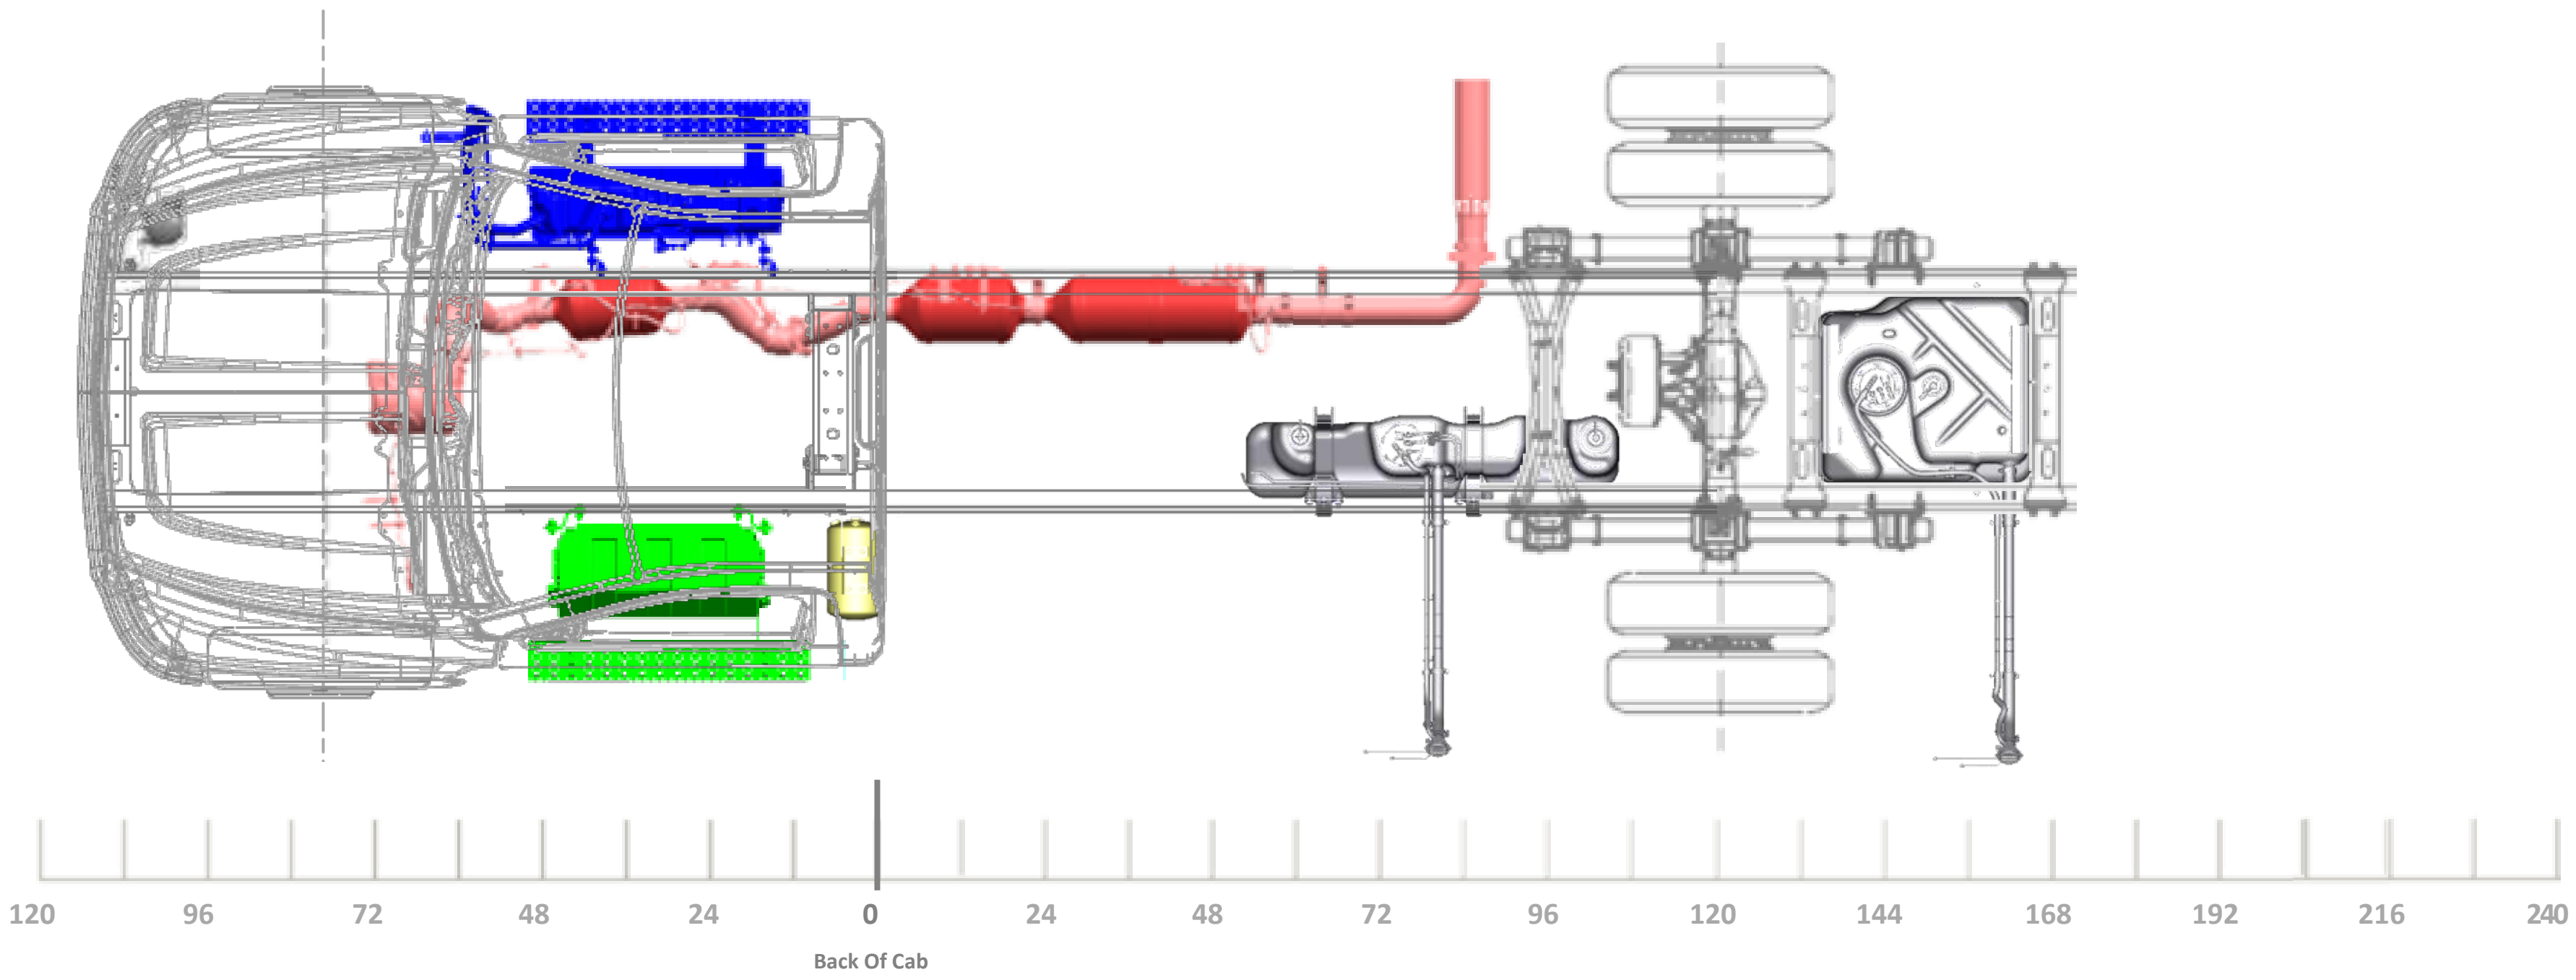
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

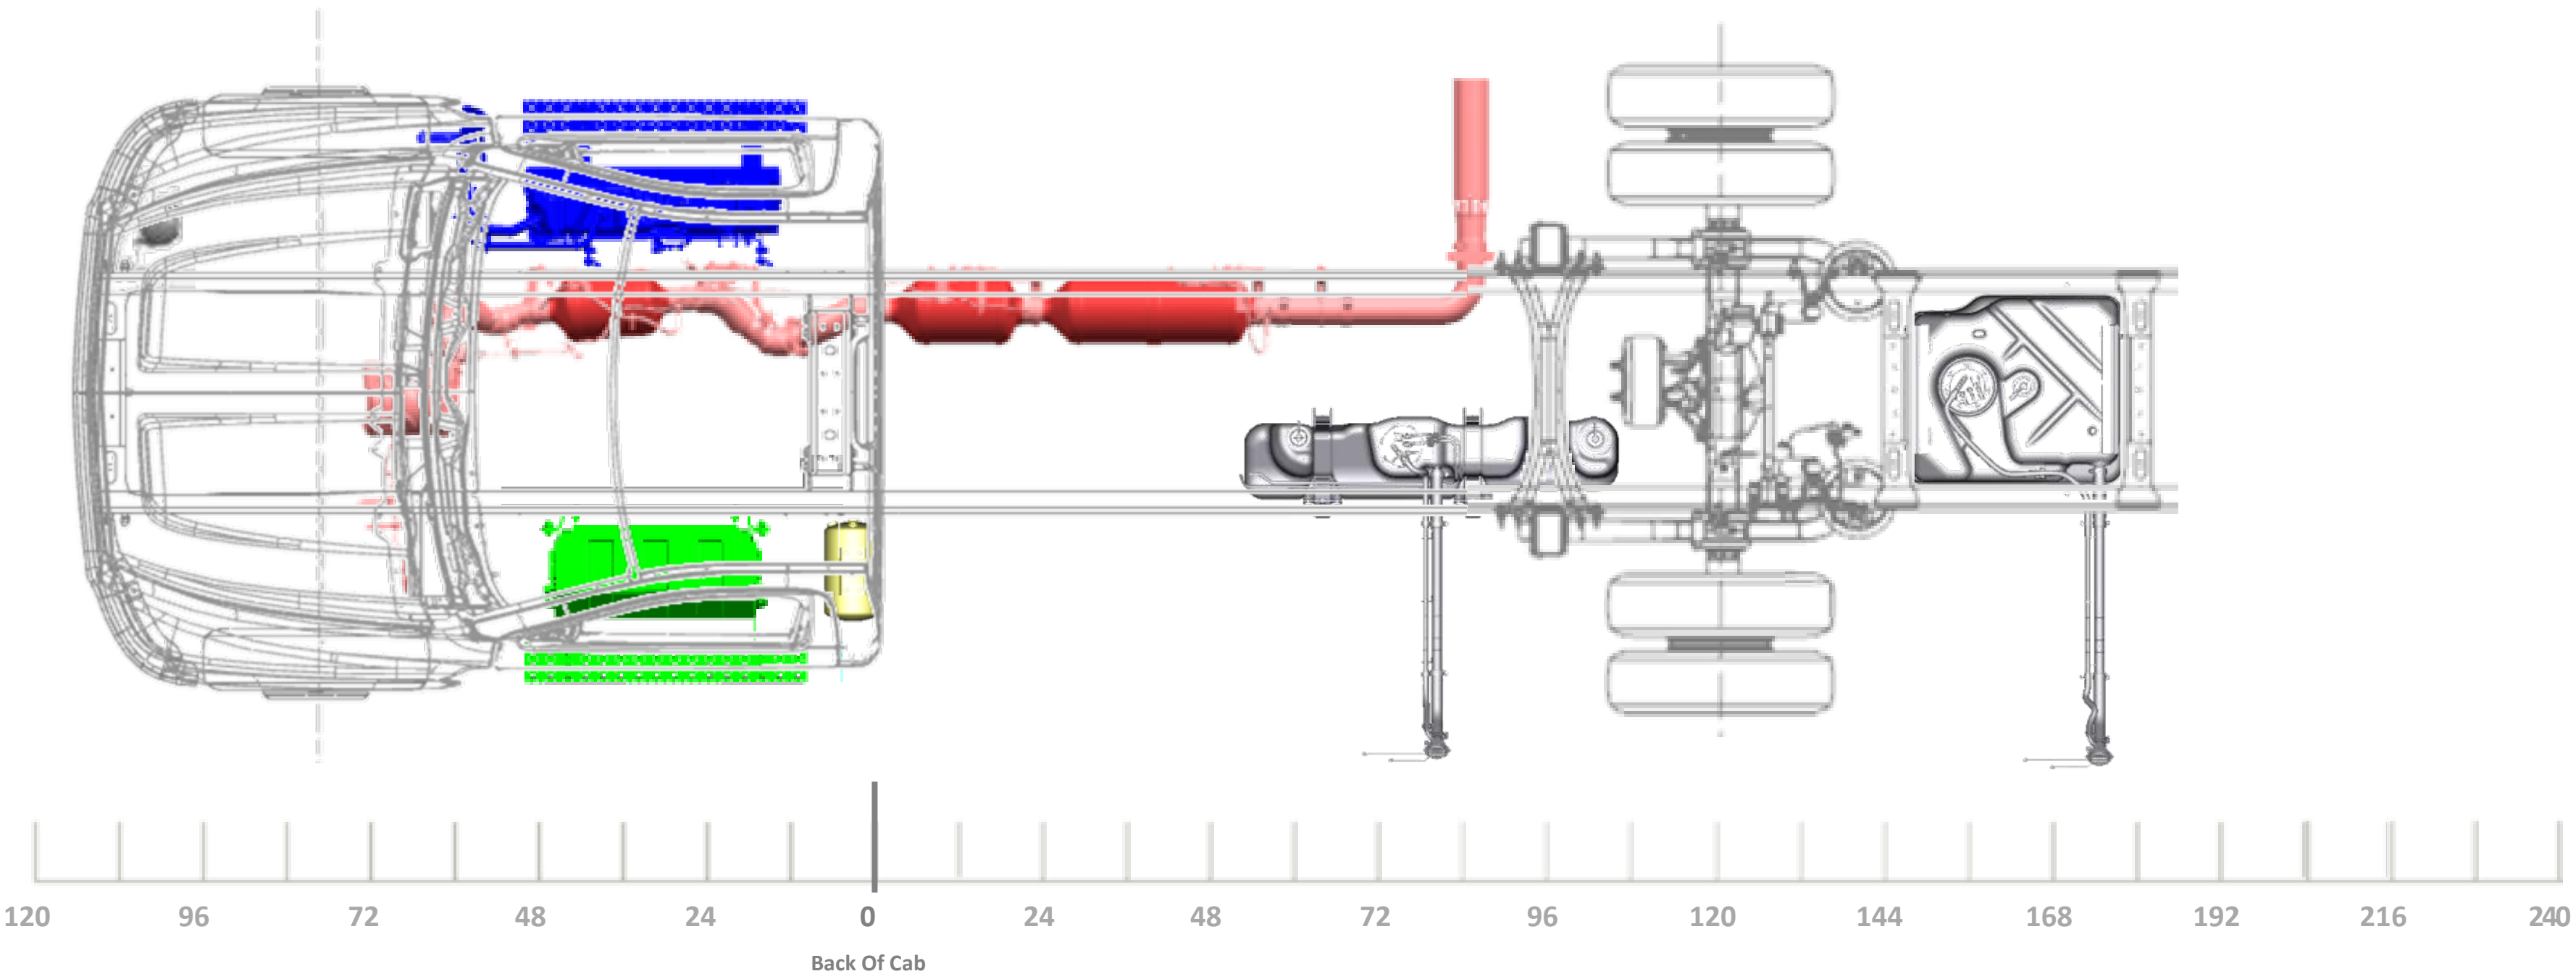
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
49”, 63”, OR 75” AF

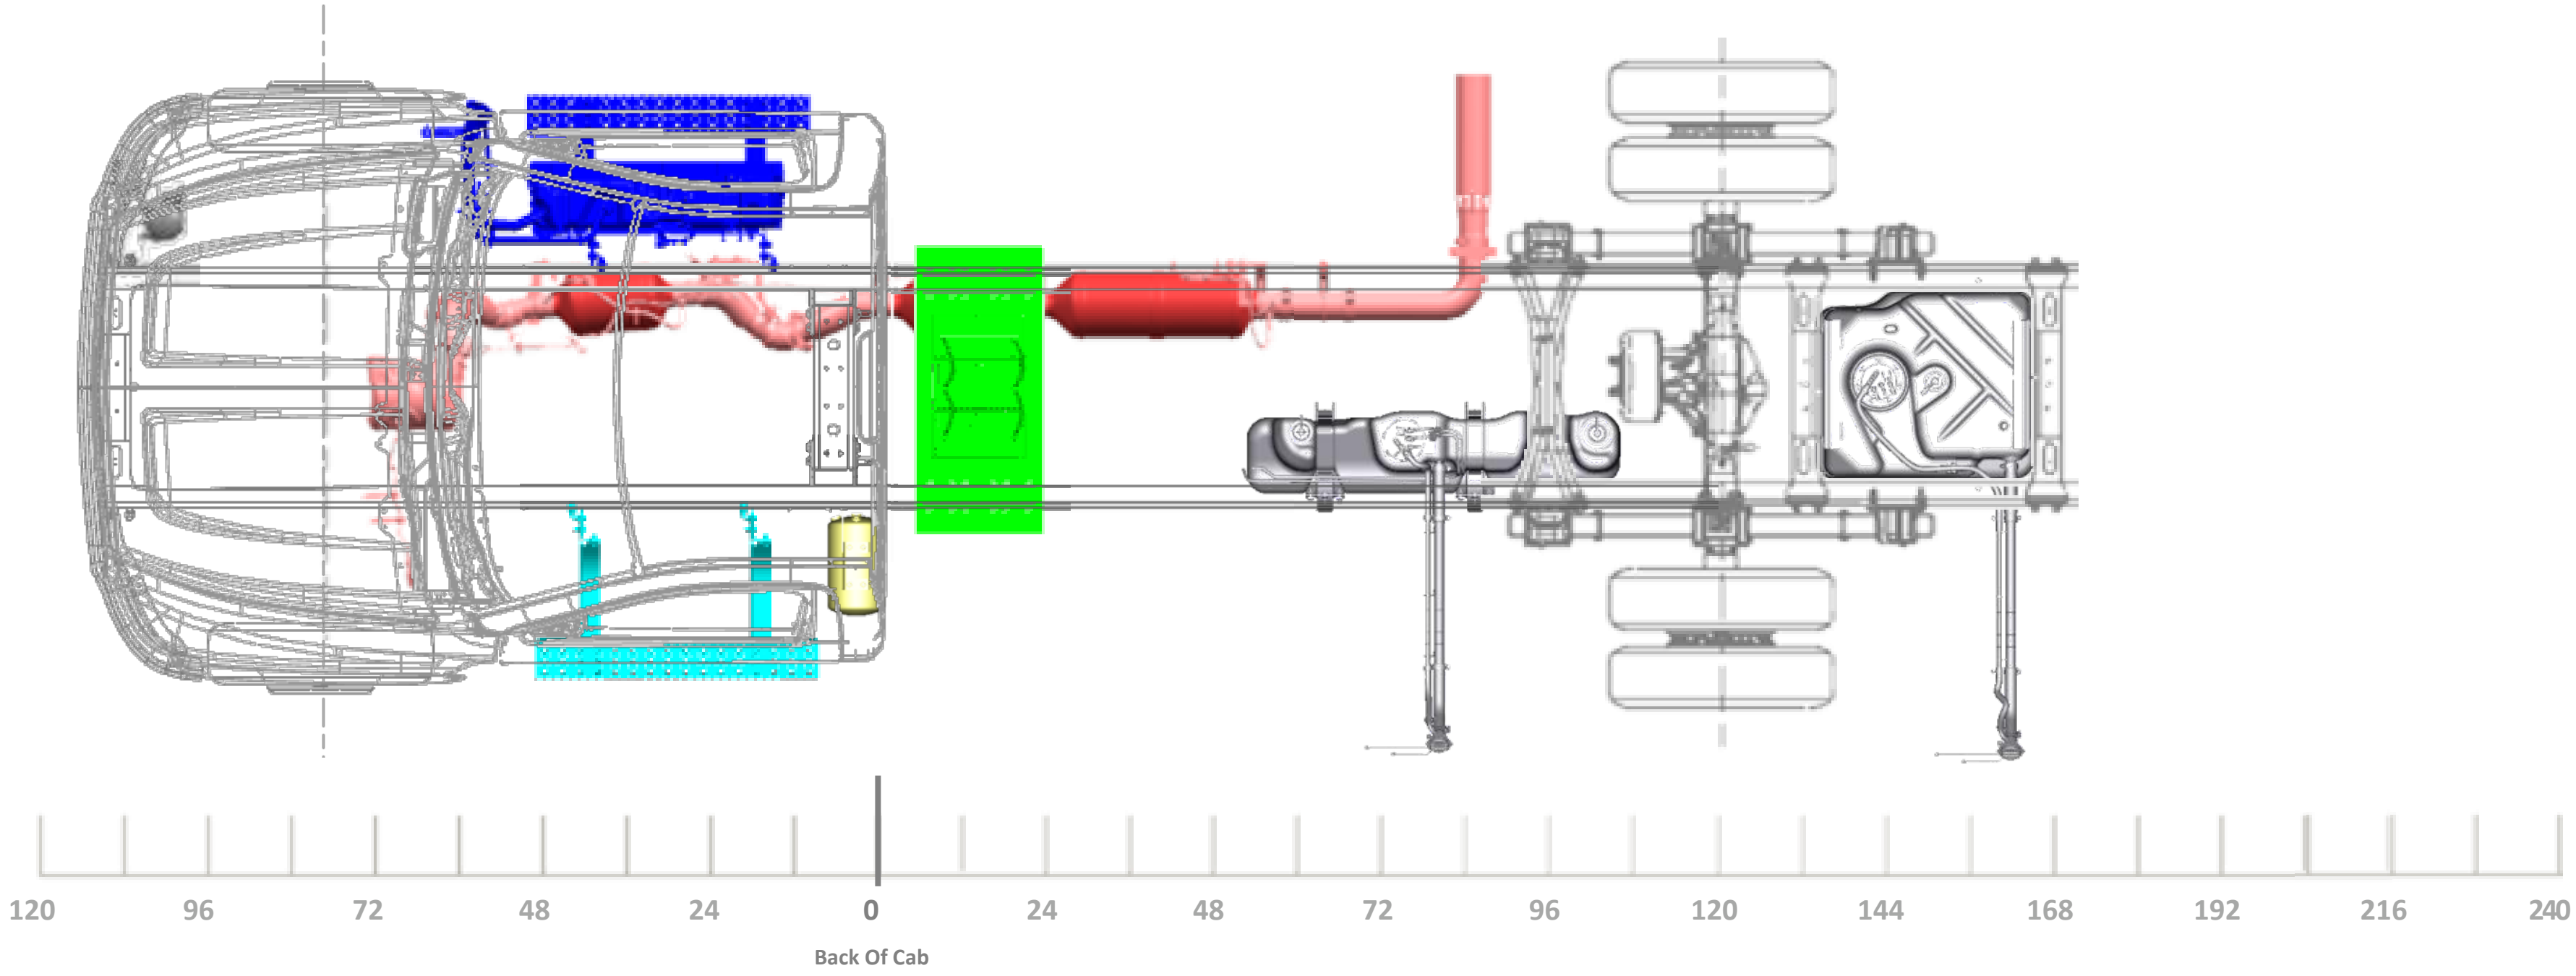
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

201” WB (120” CA)
63” OR 75” AF

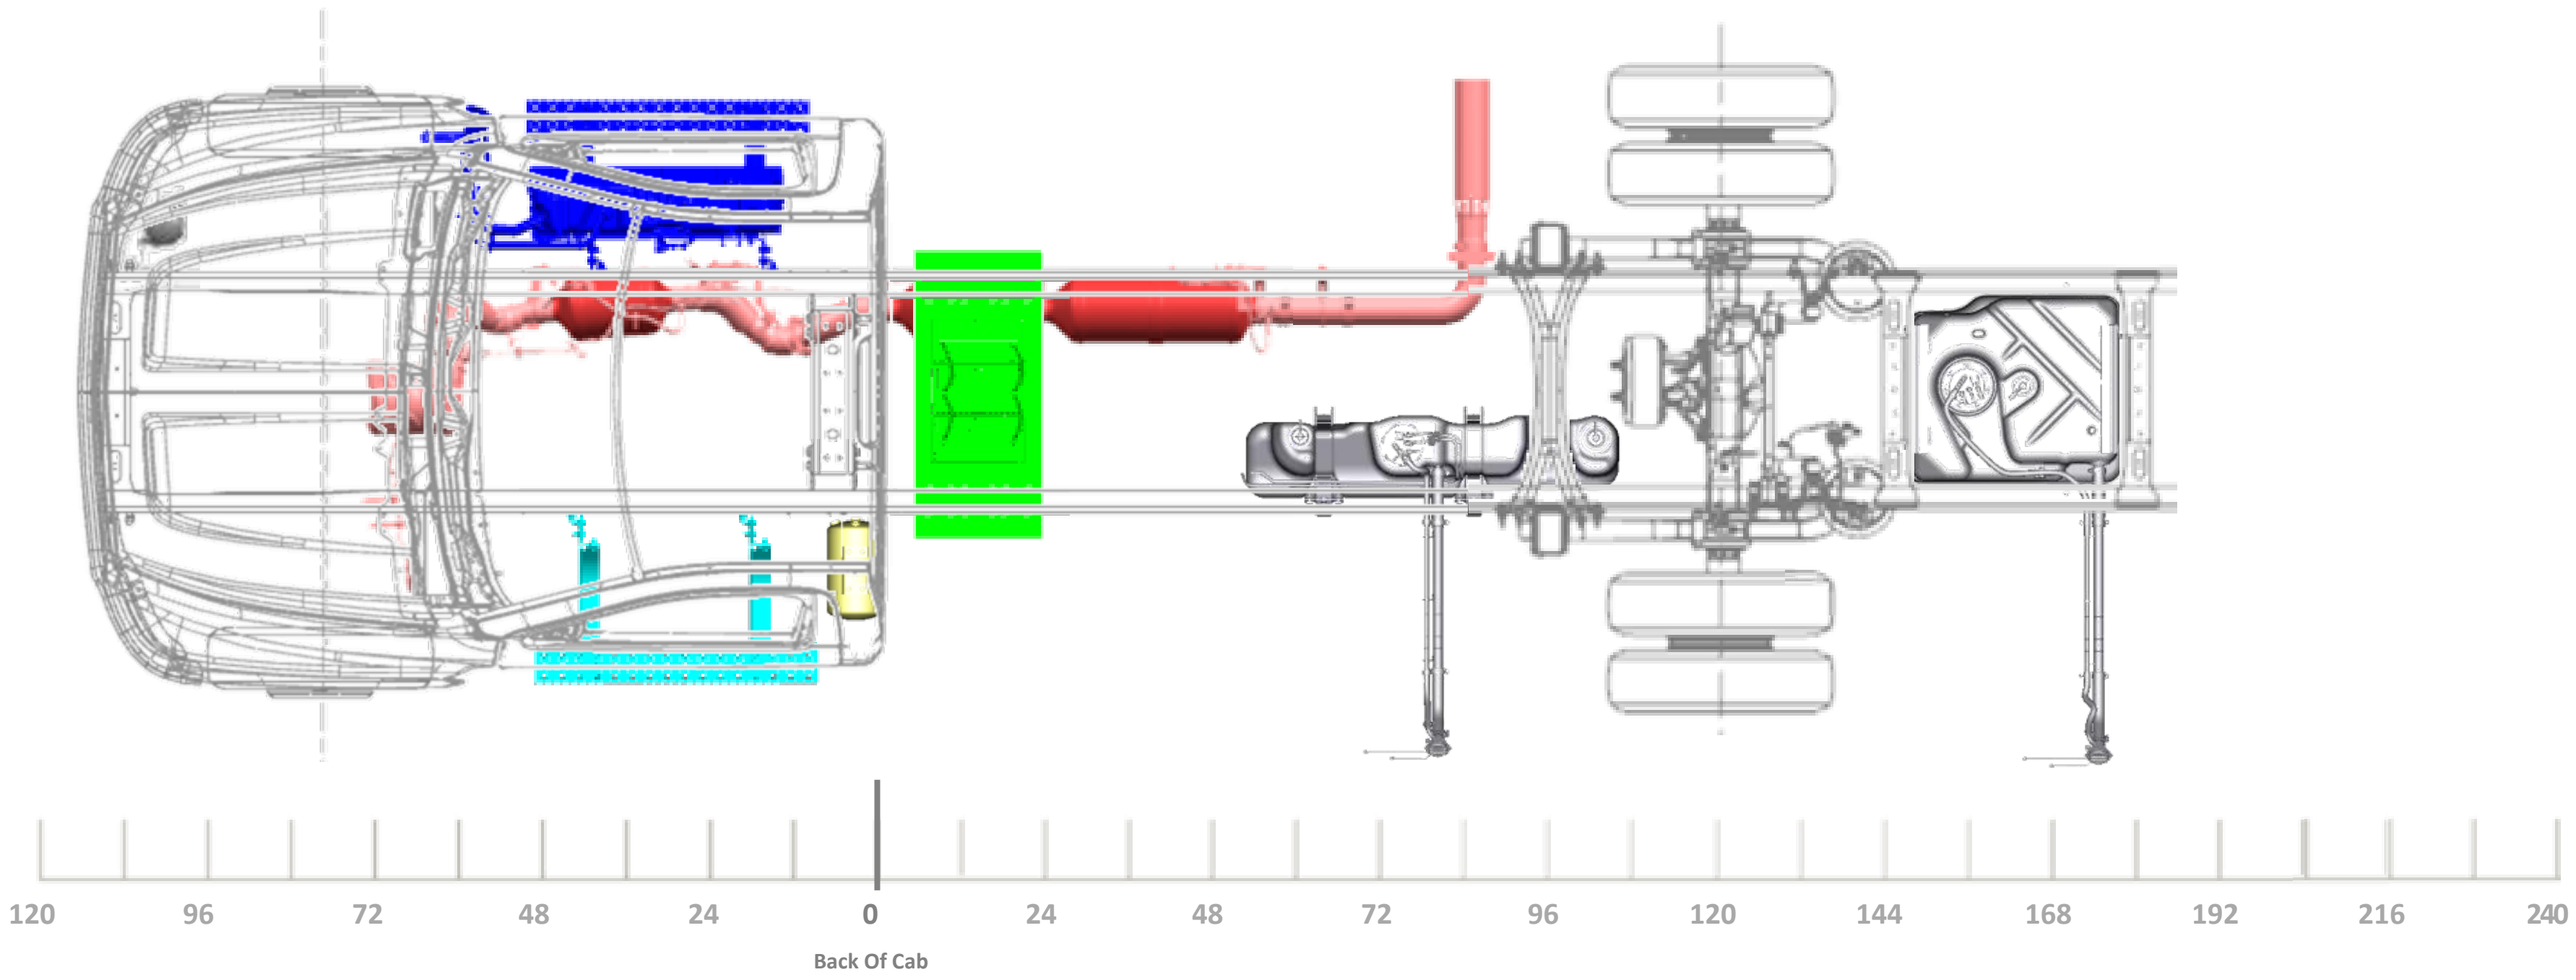
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

REGULAR
CAB 219”
WB

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

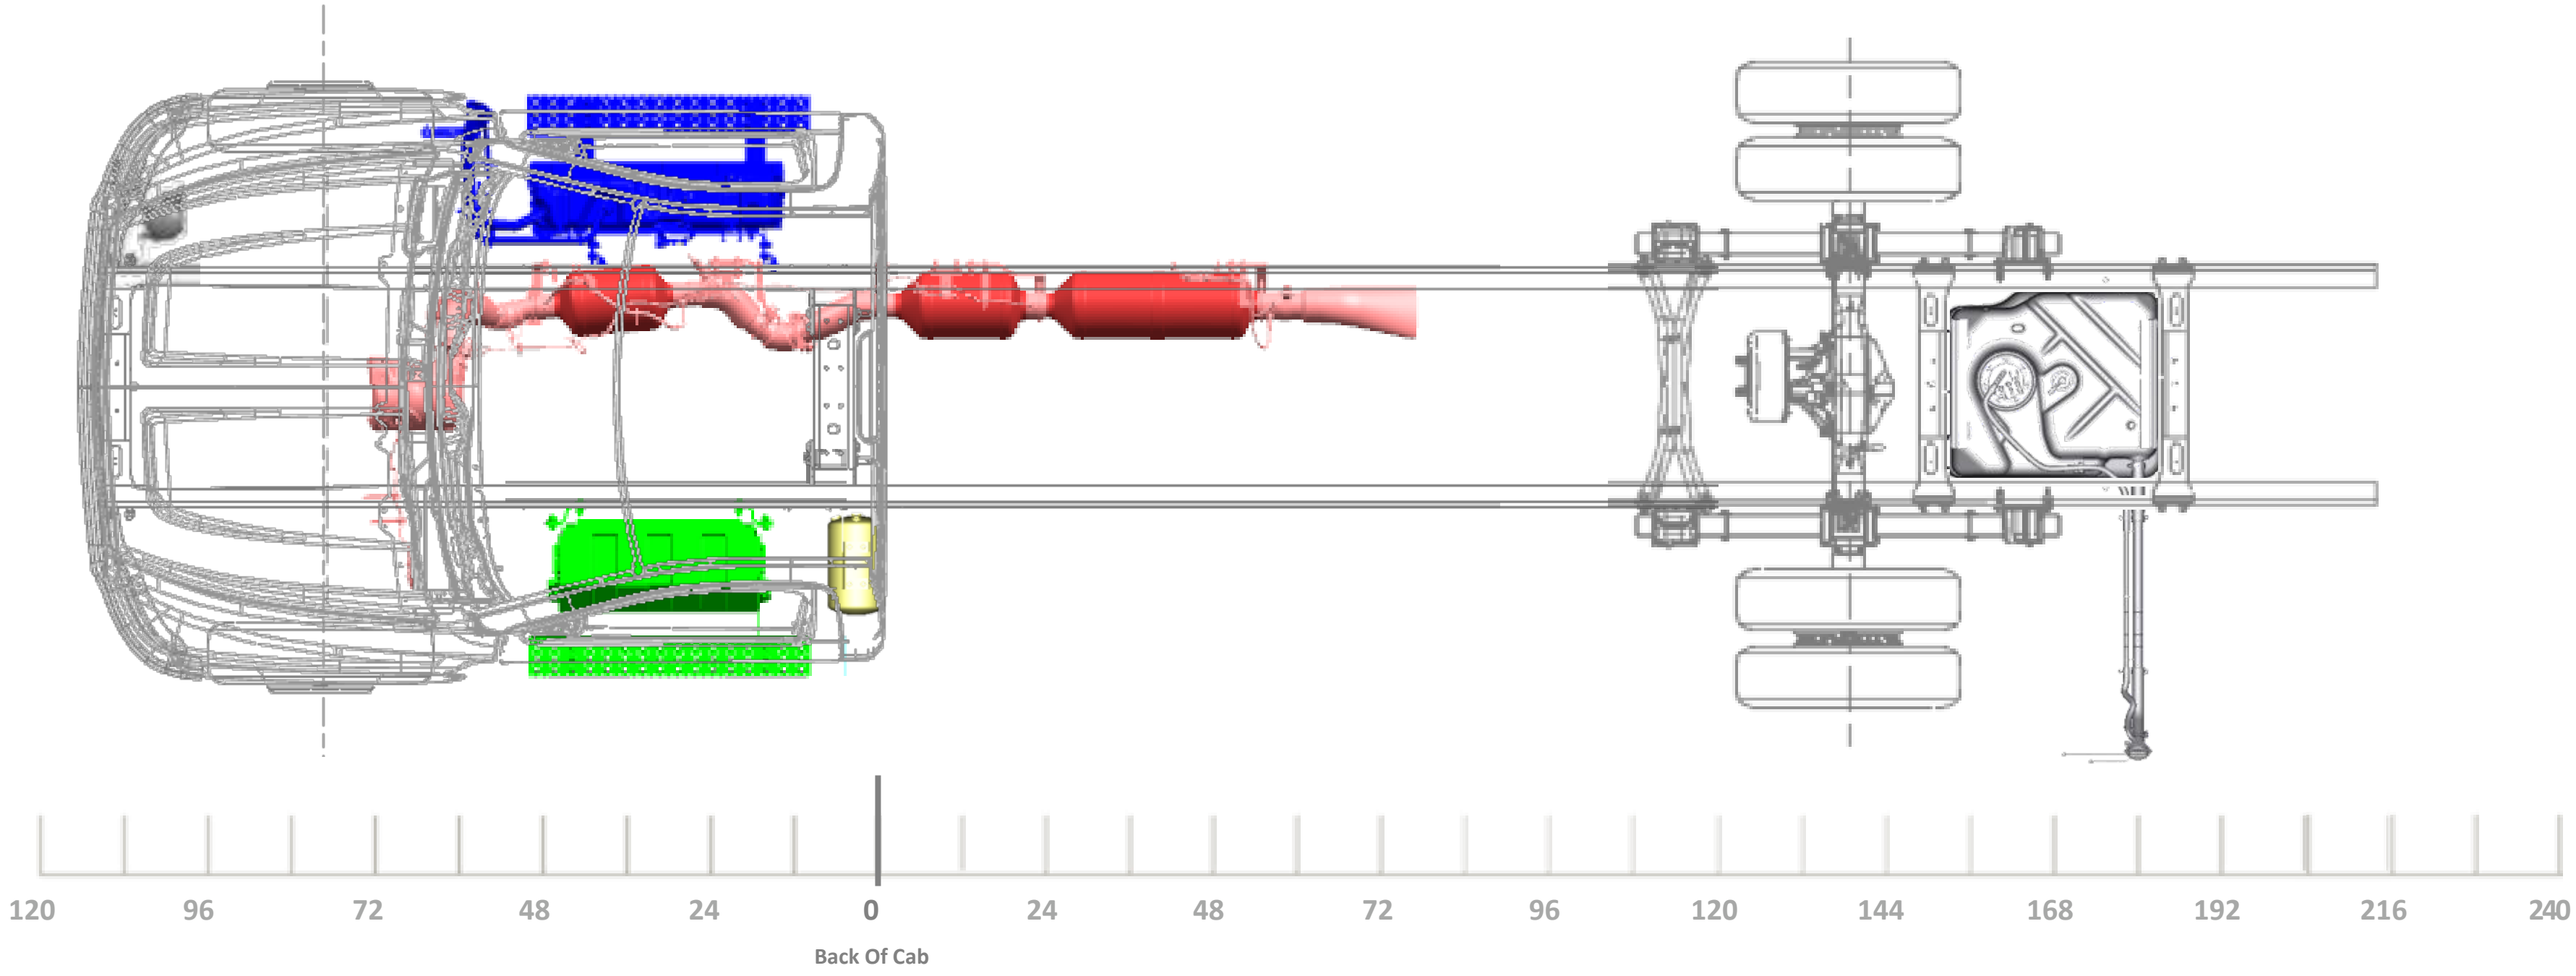
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

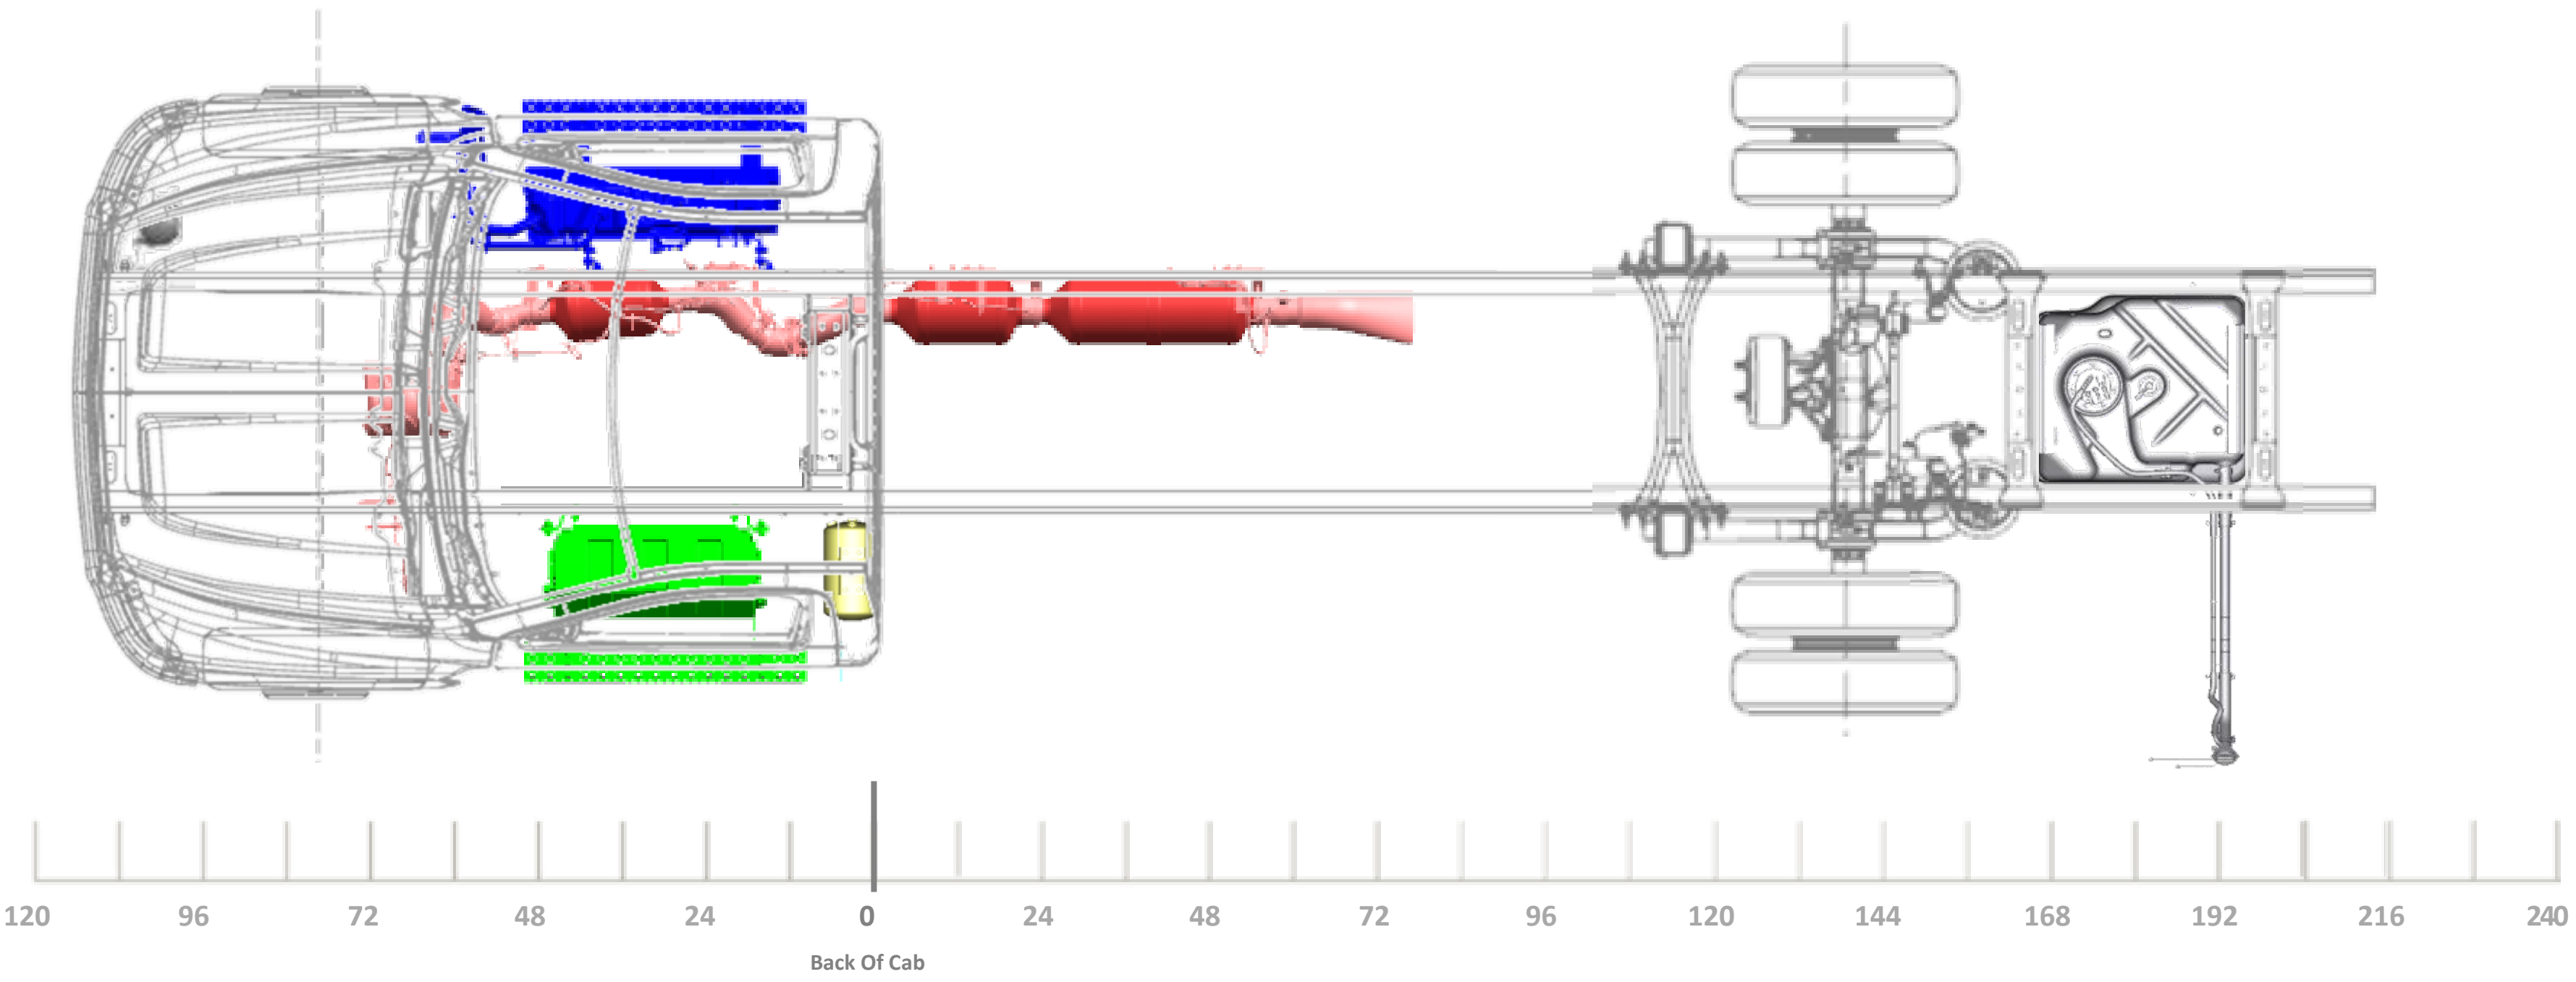
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

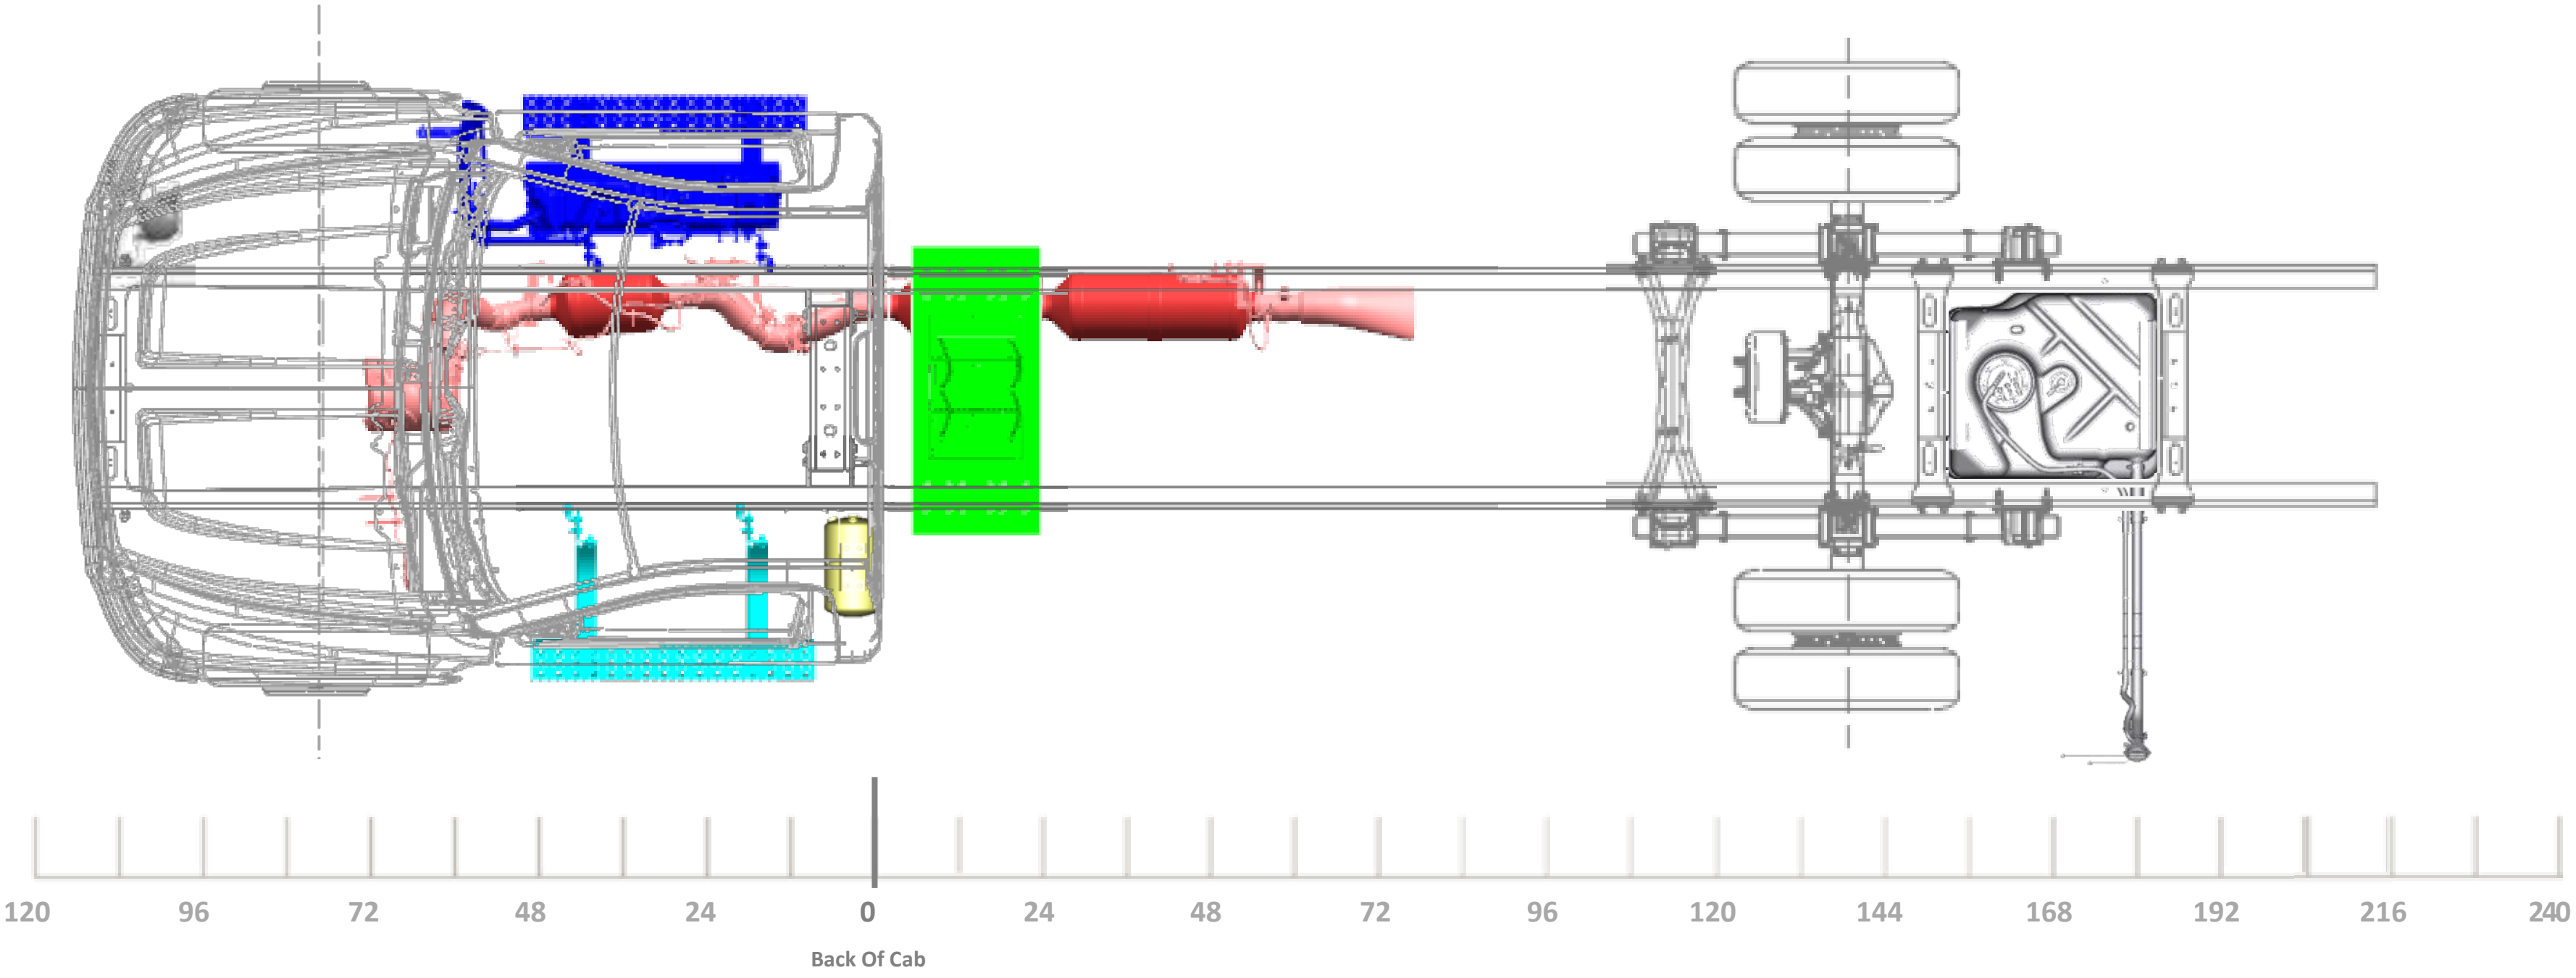
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

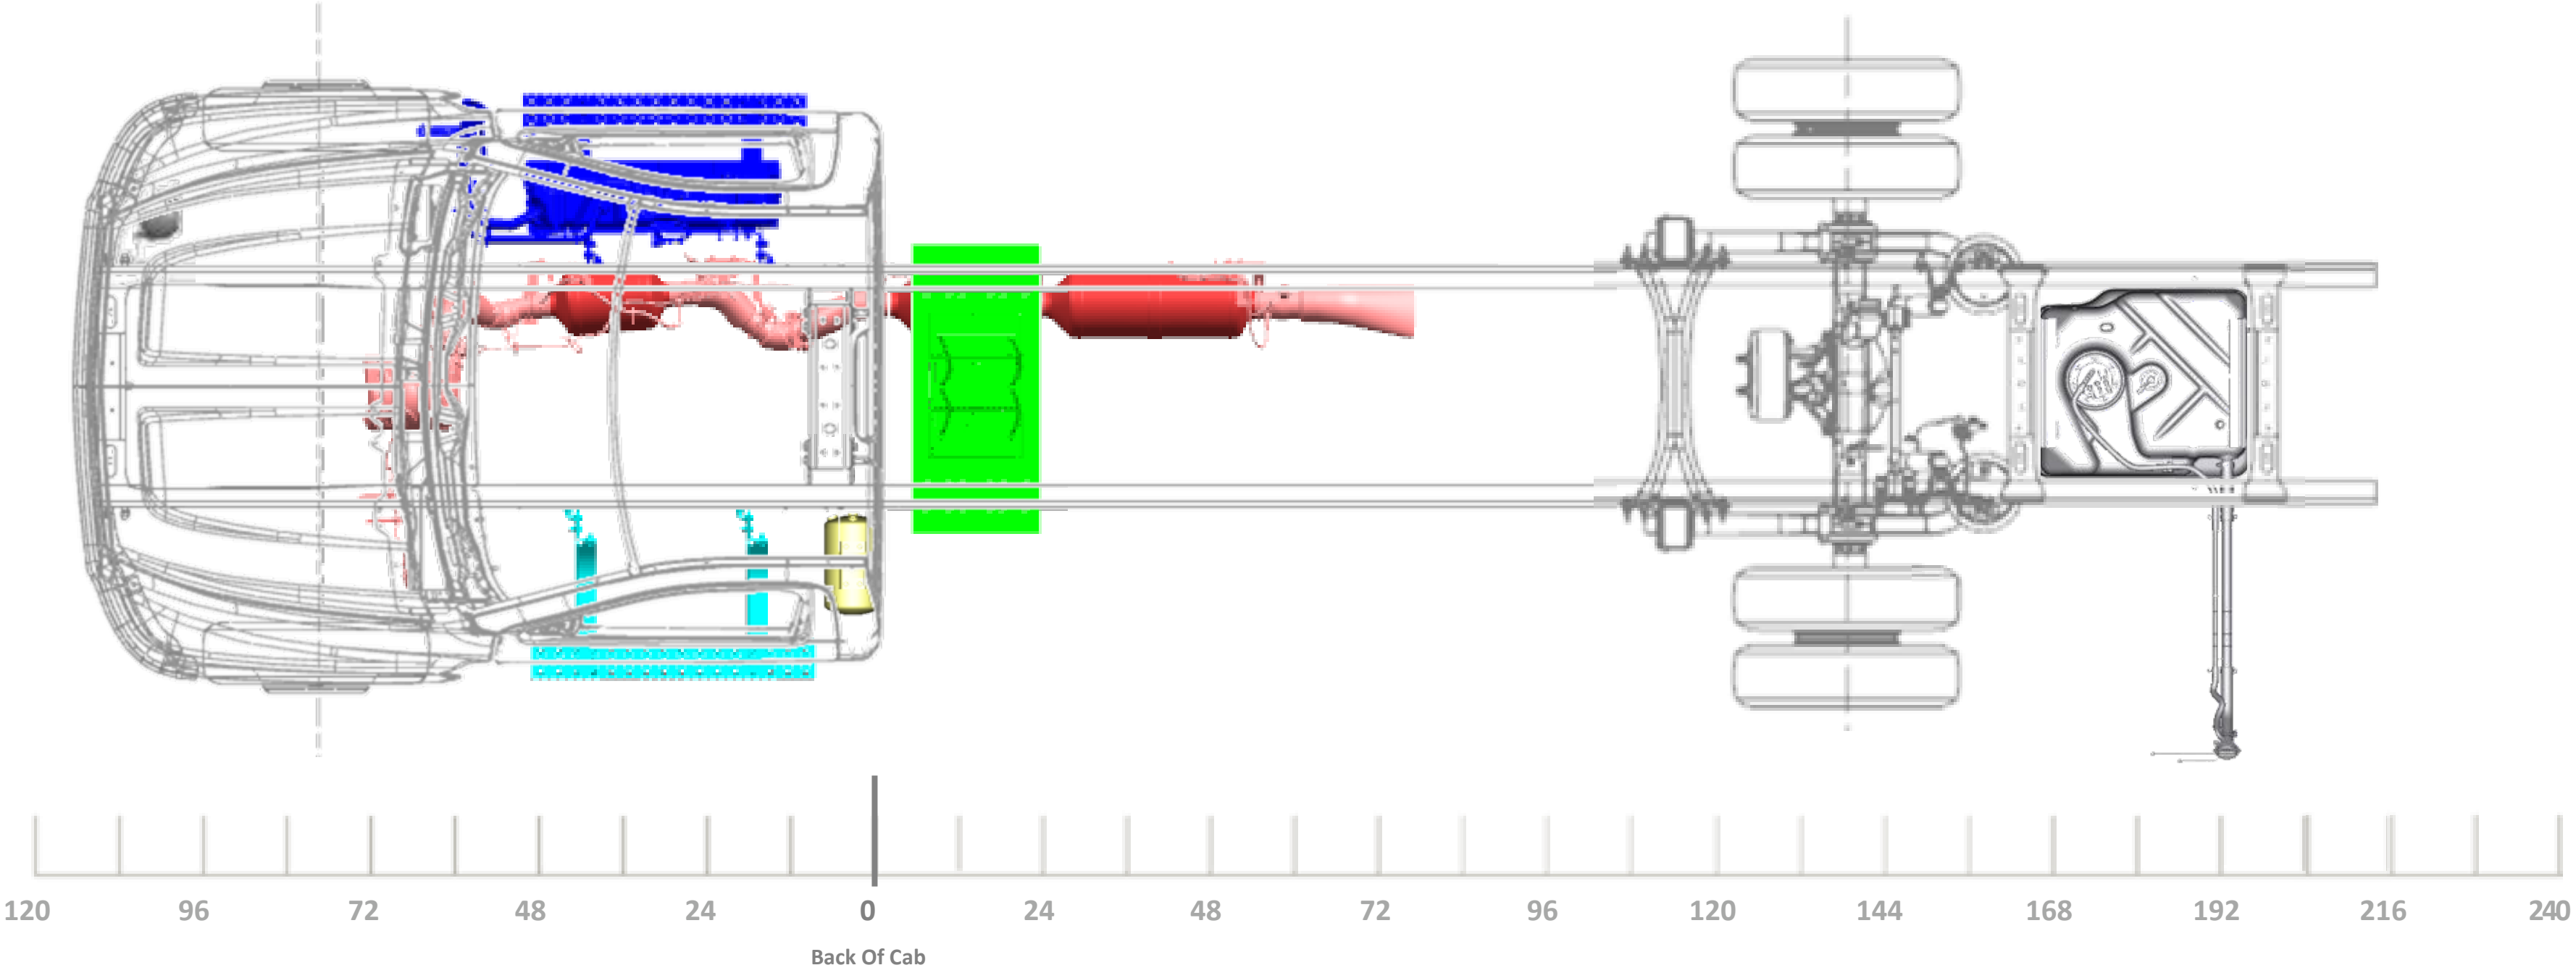
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

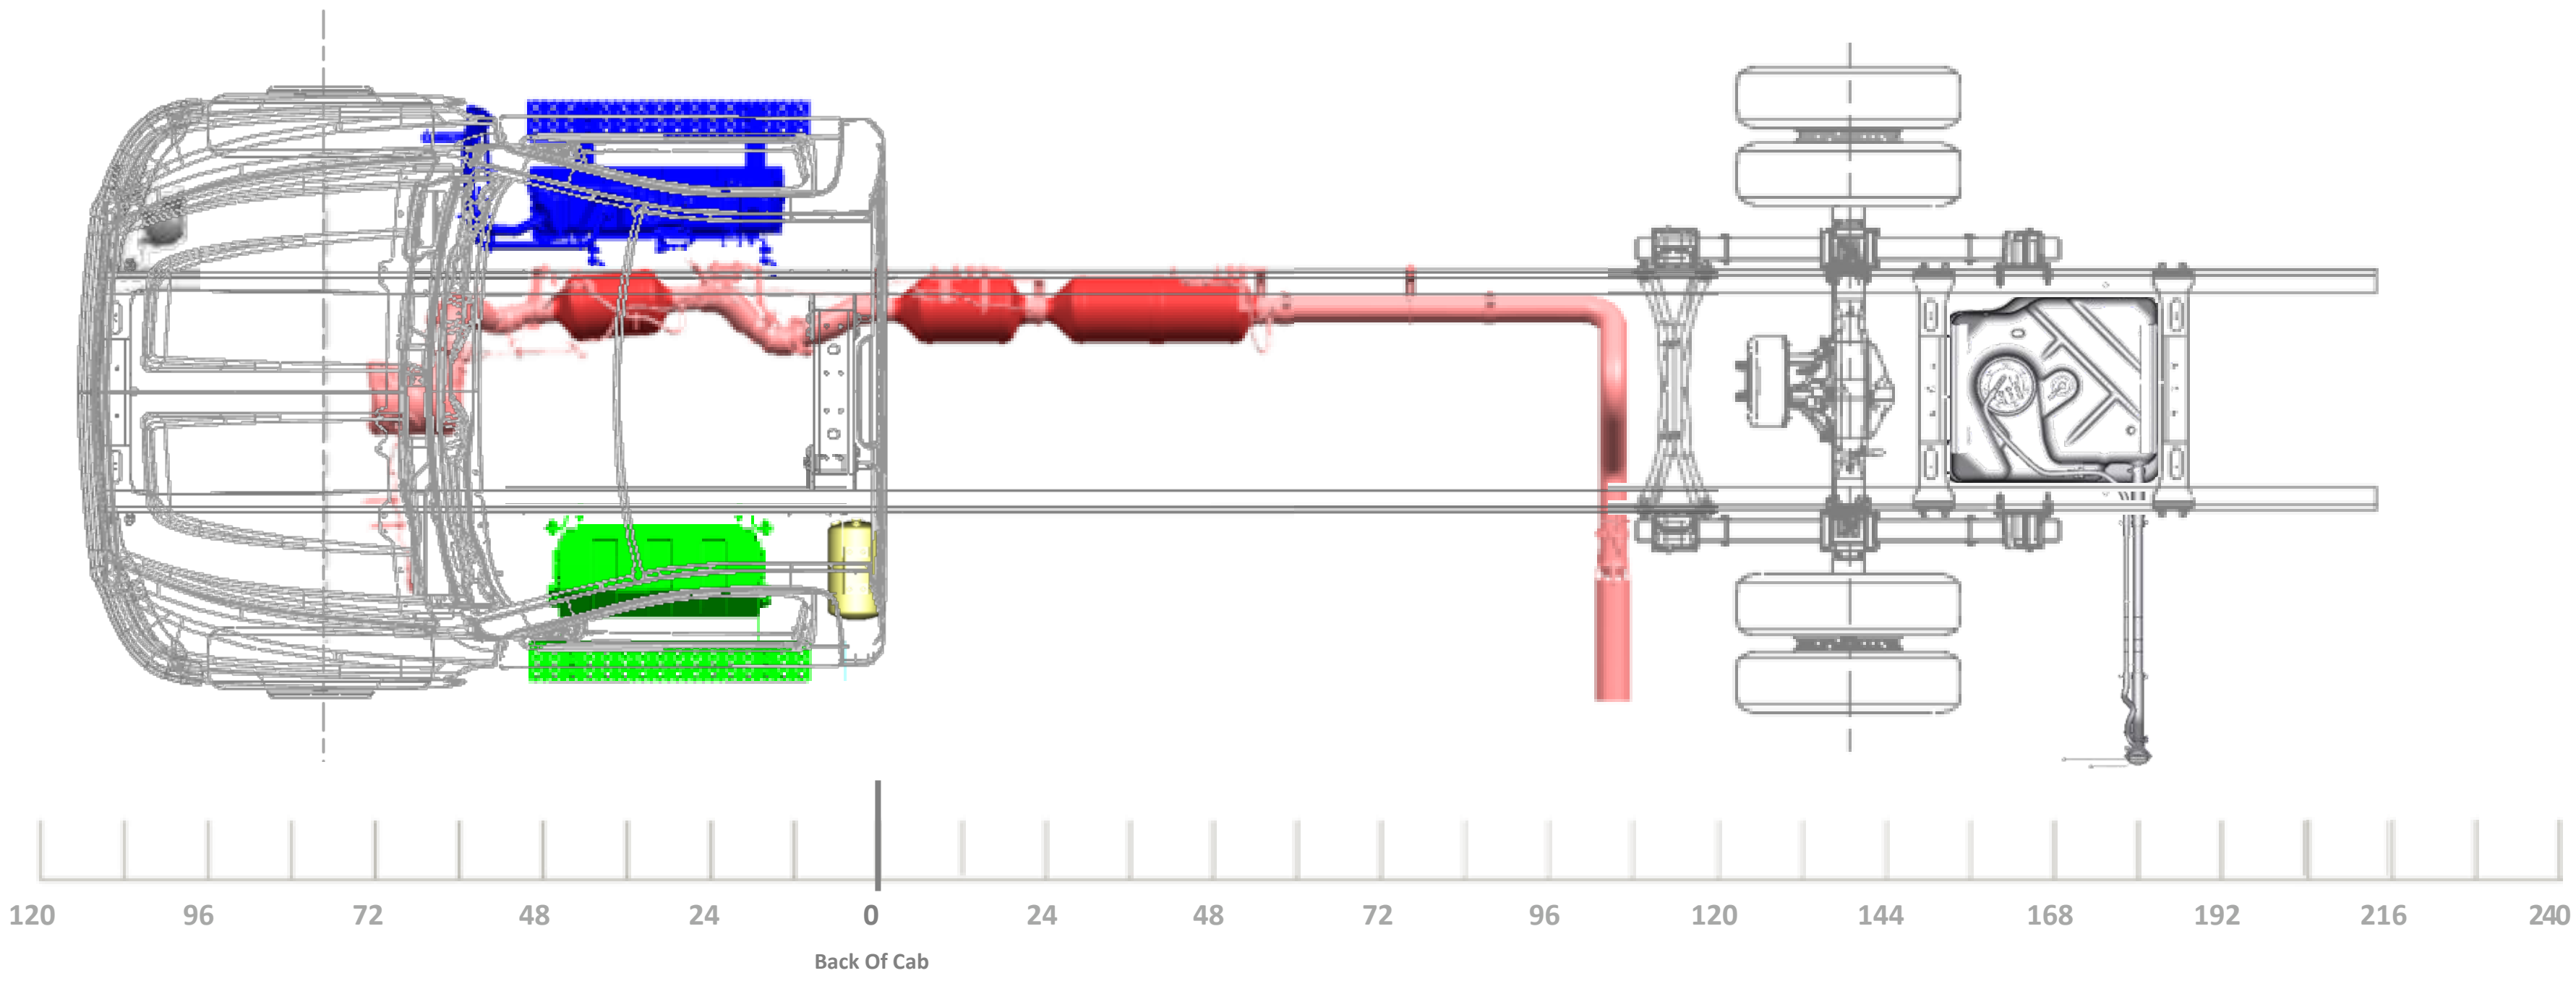
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

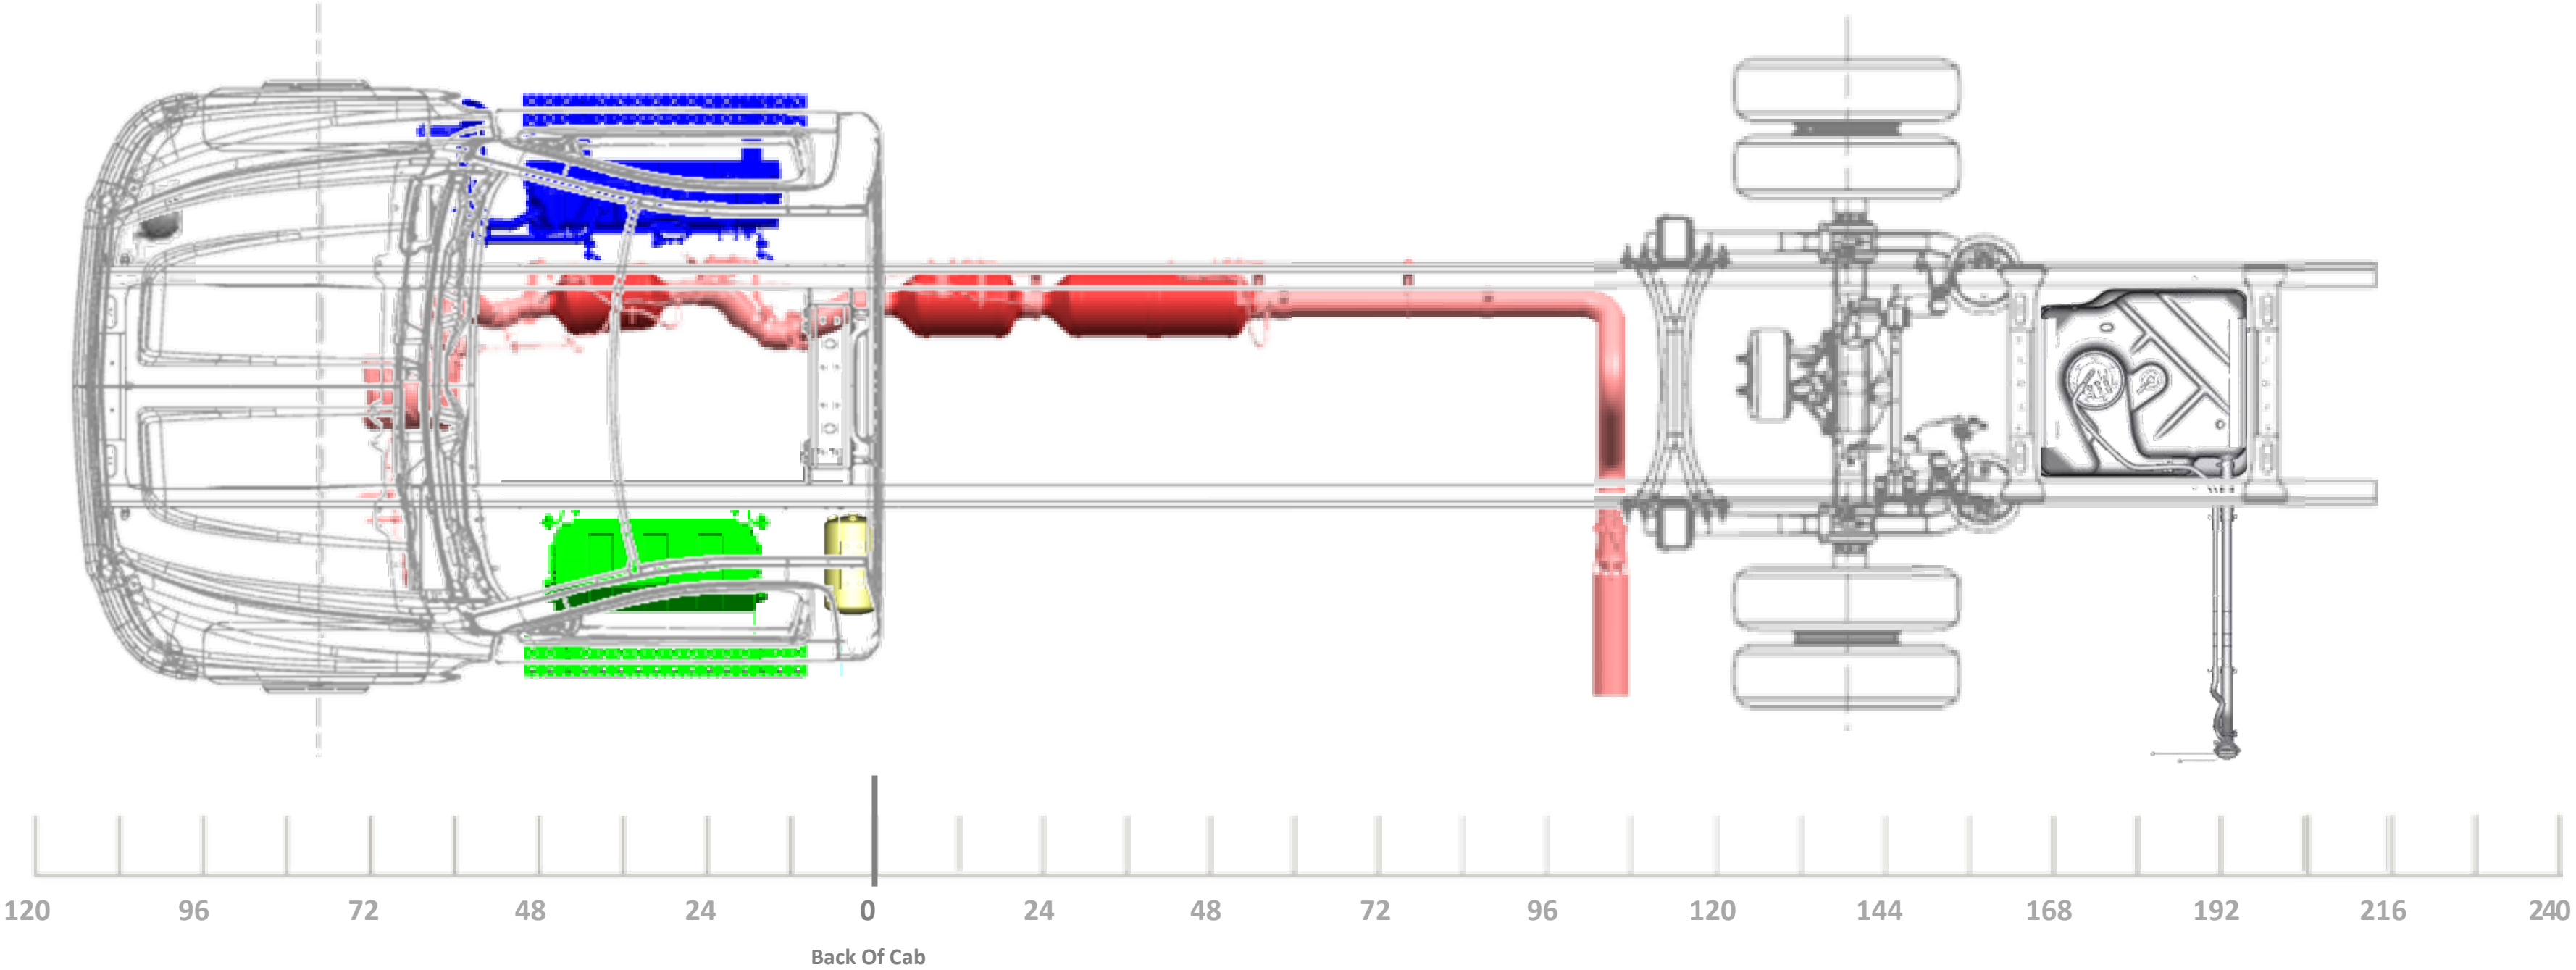
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

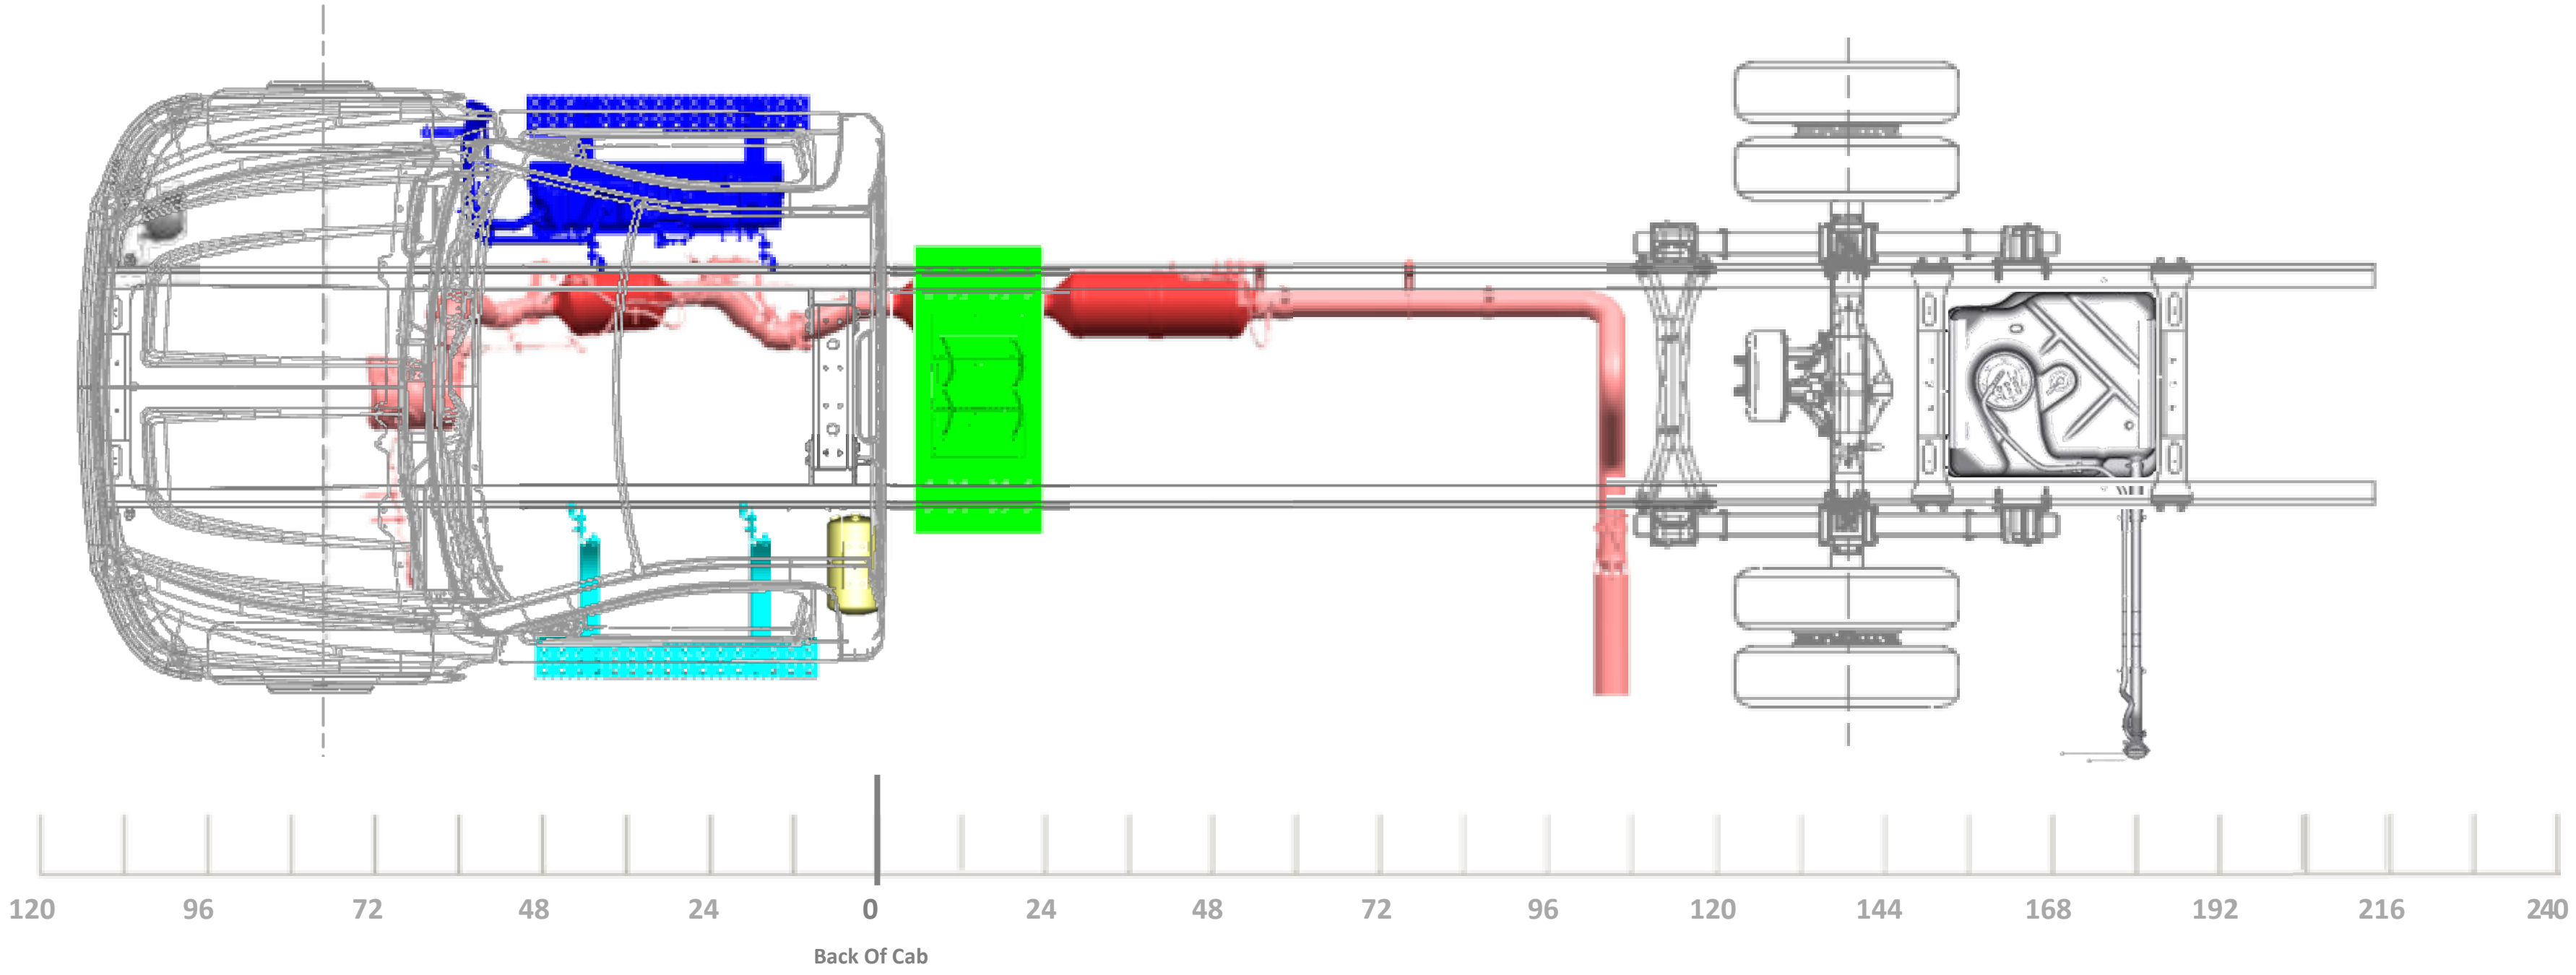
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

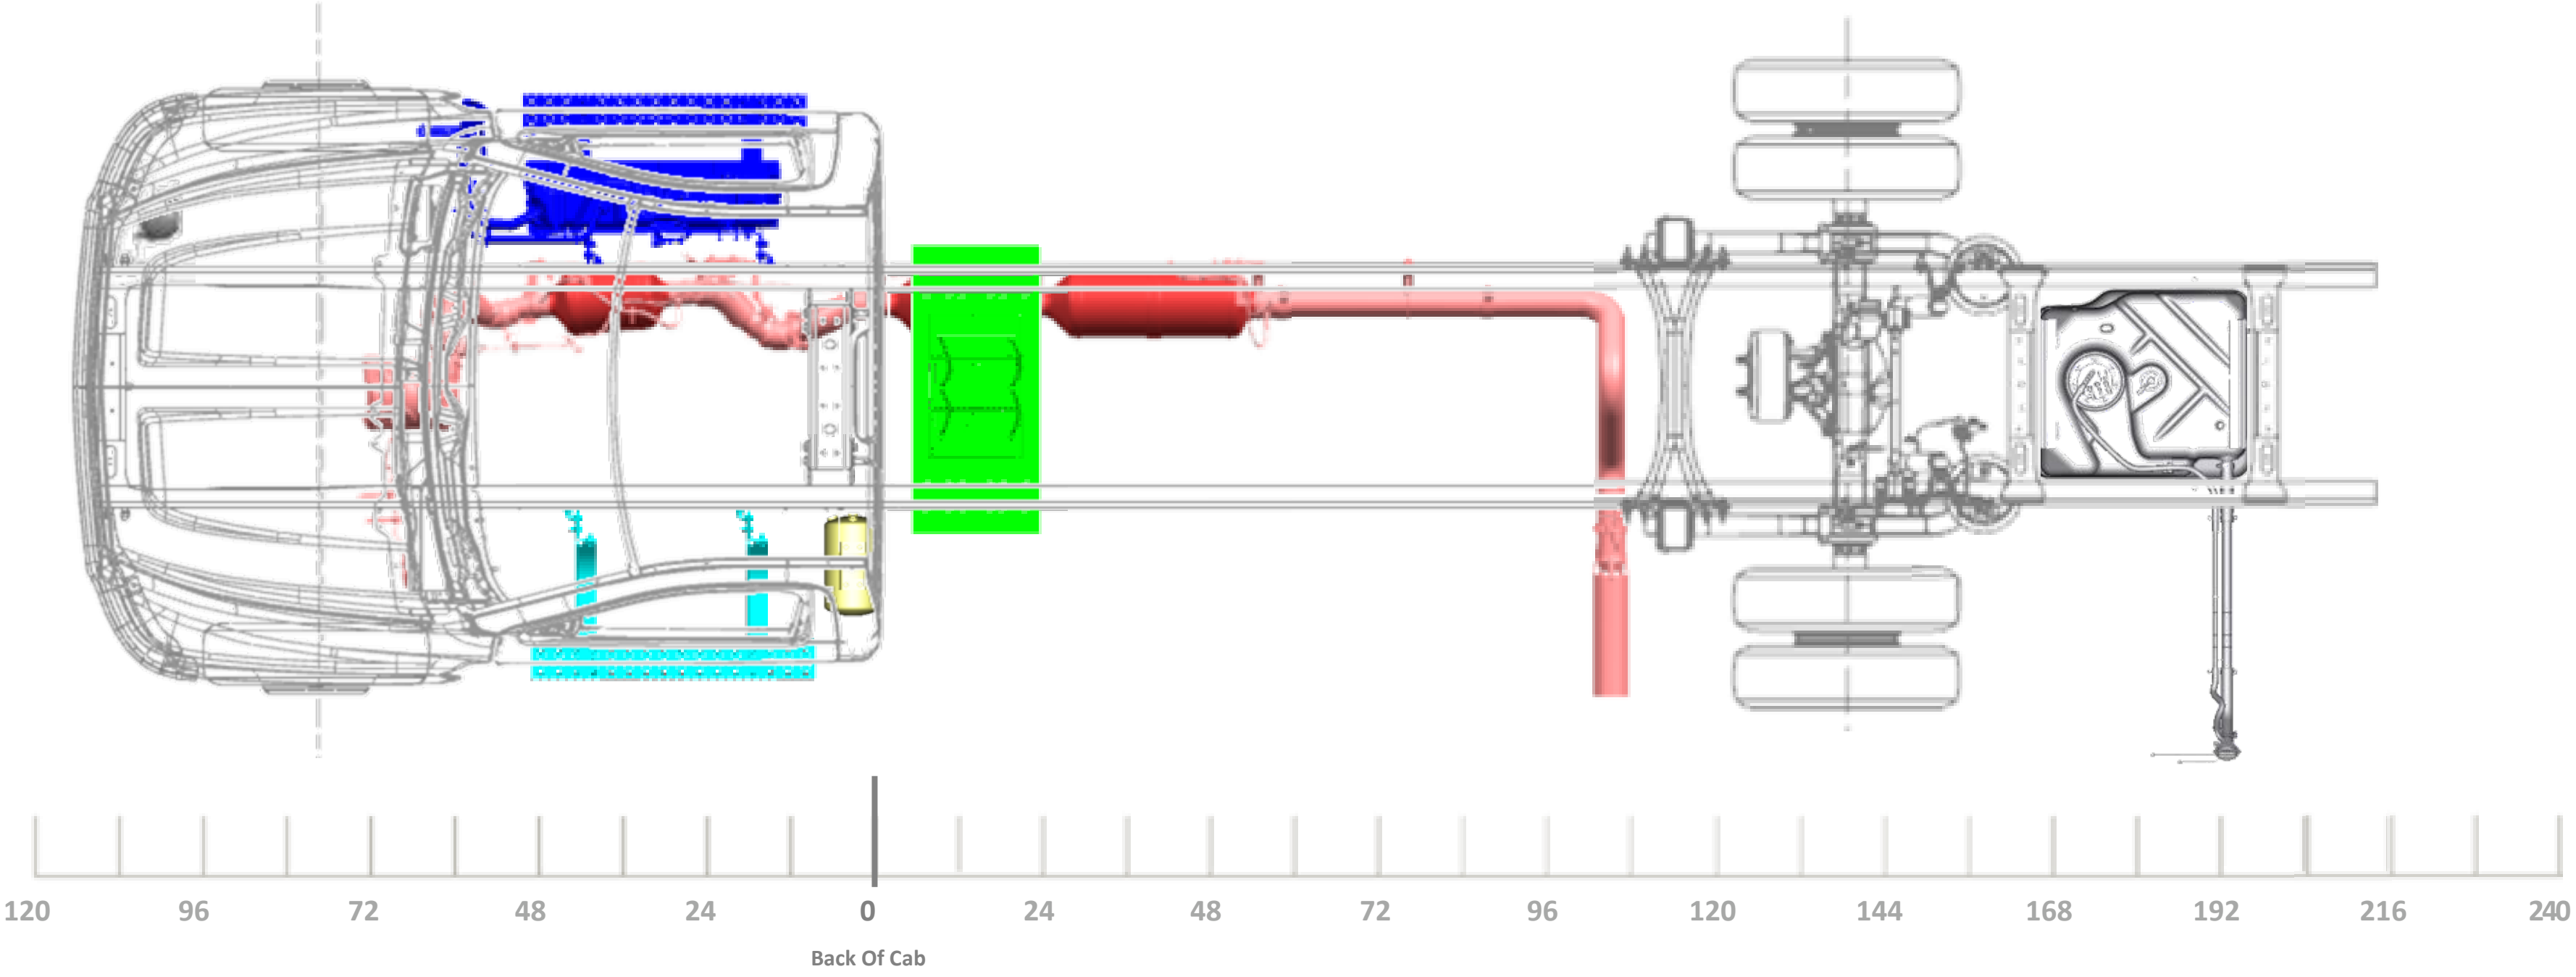
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

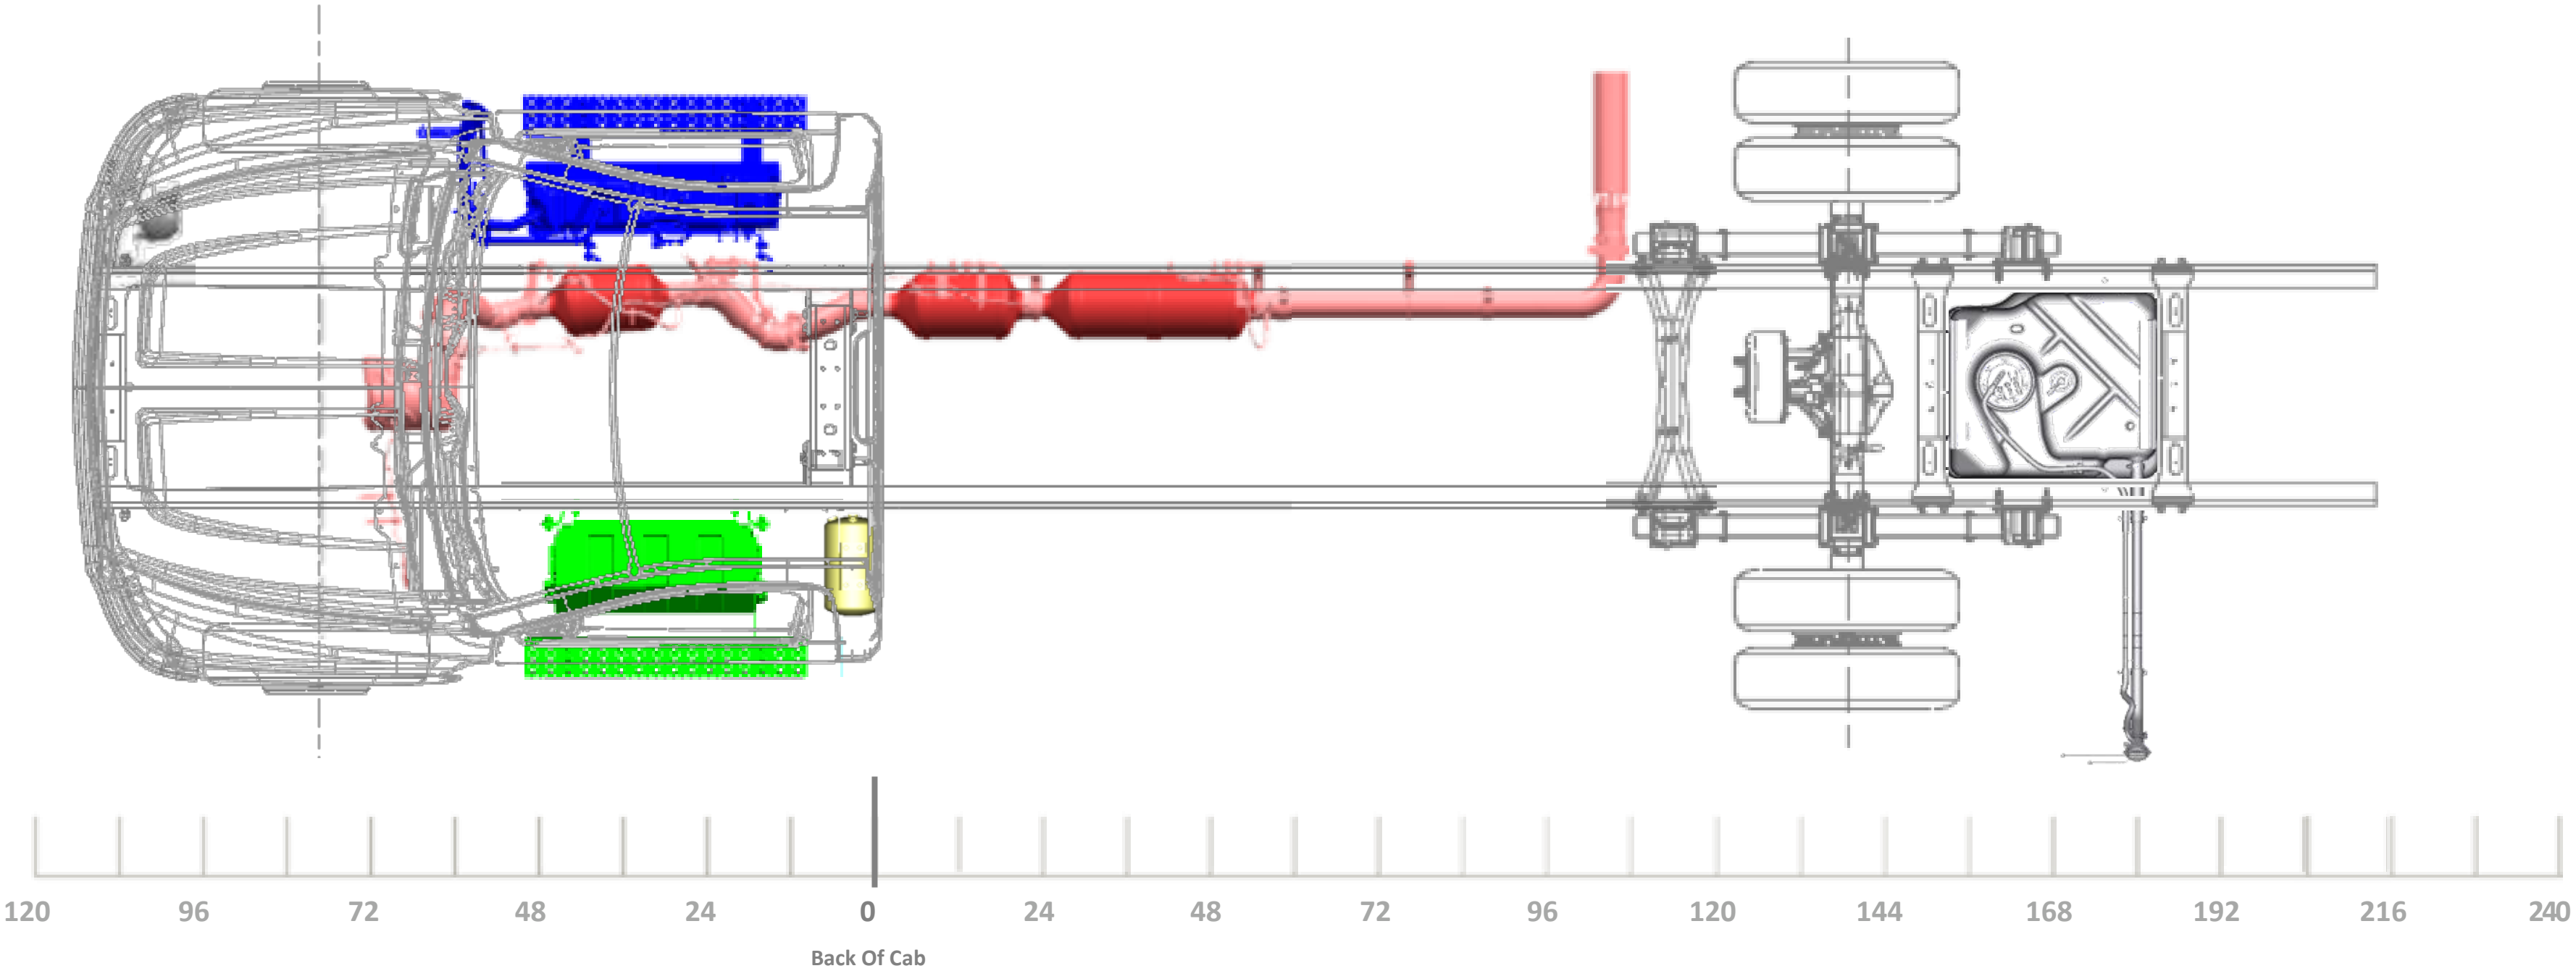
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

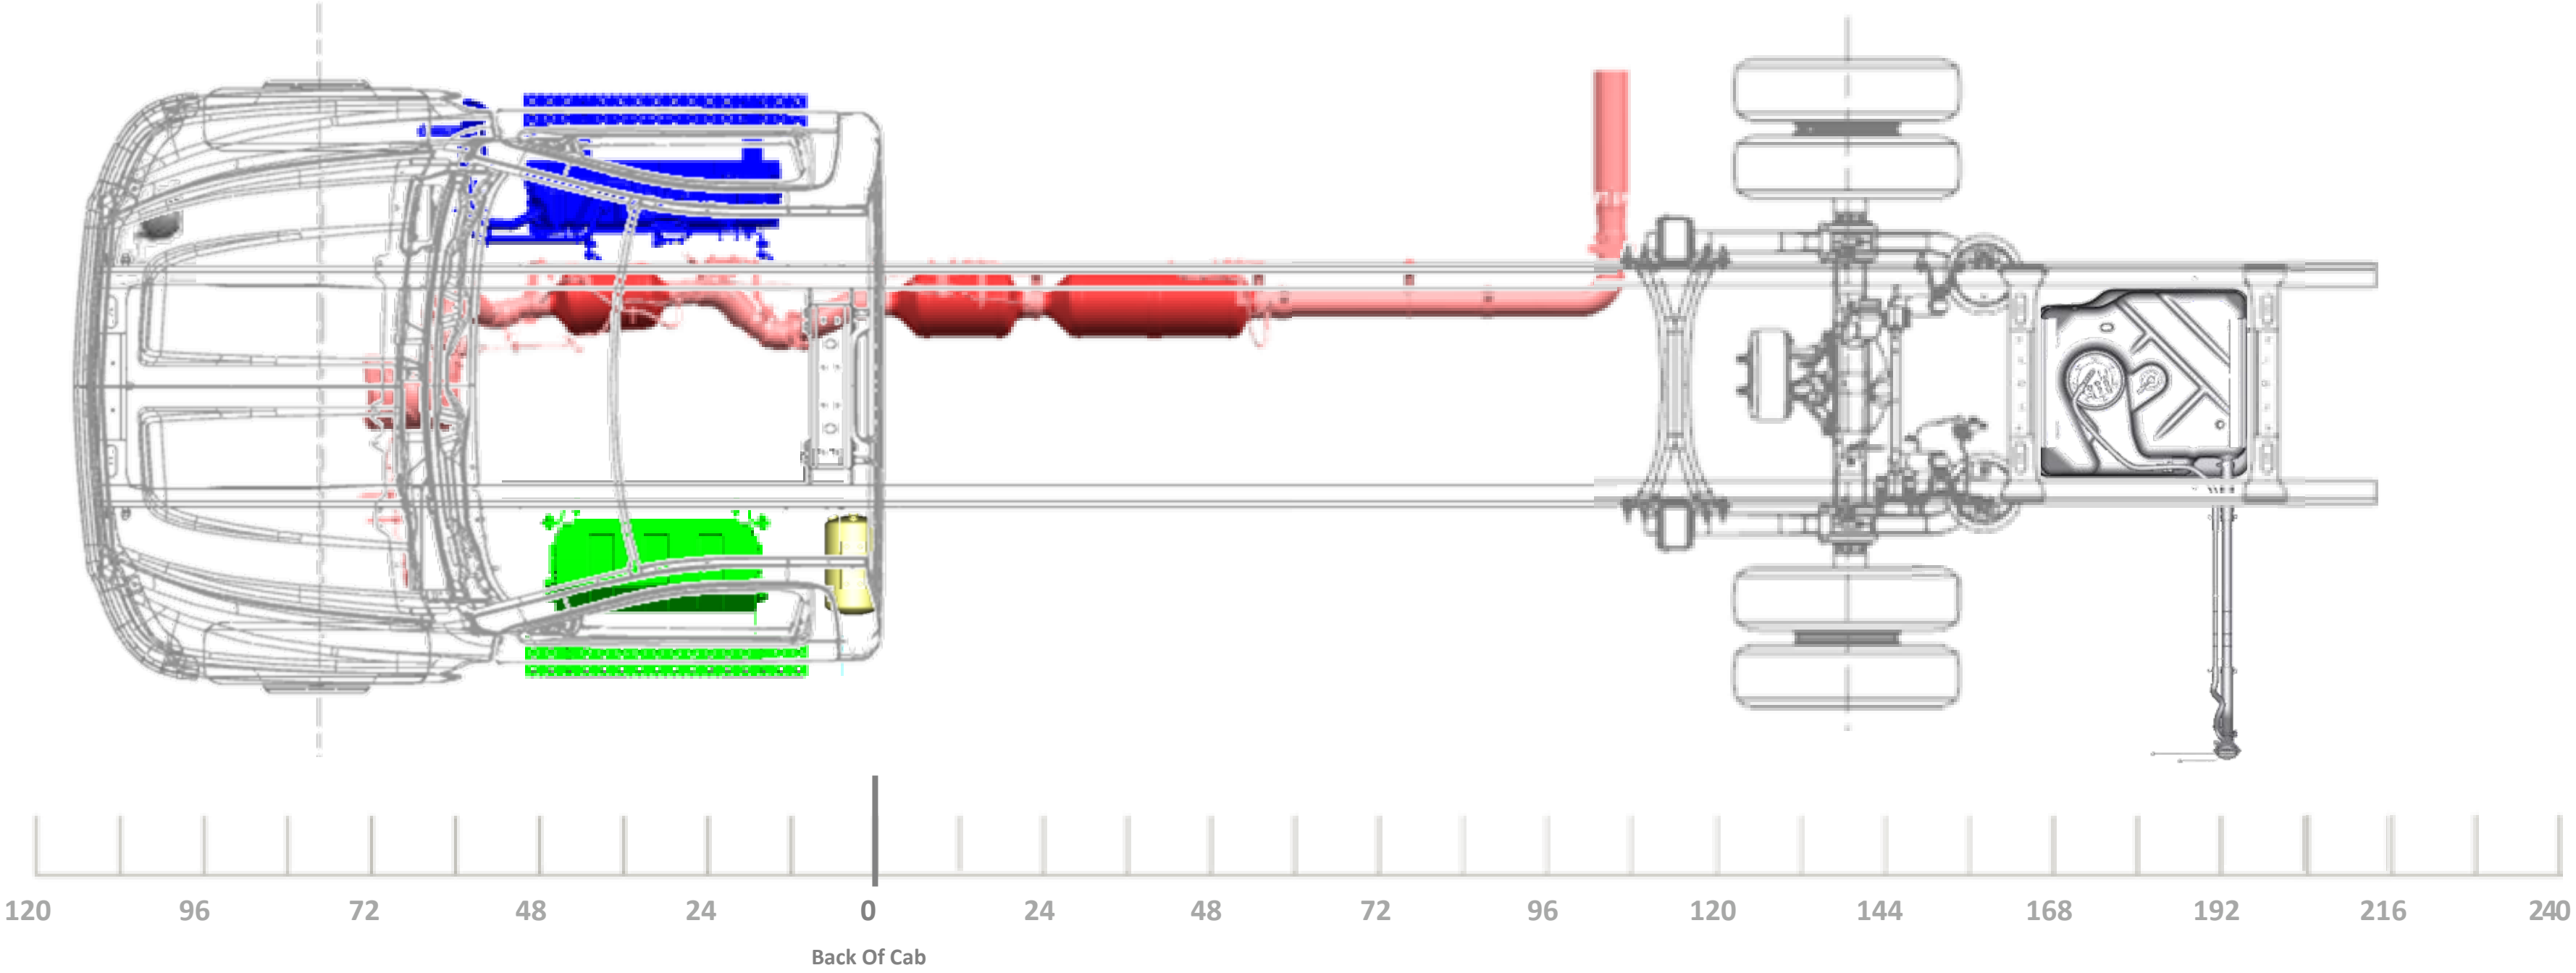
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

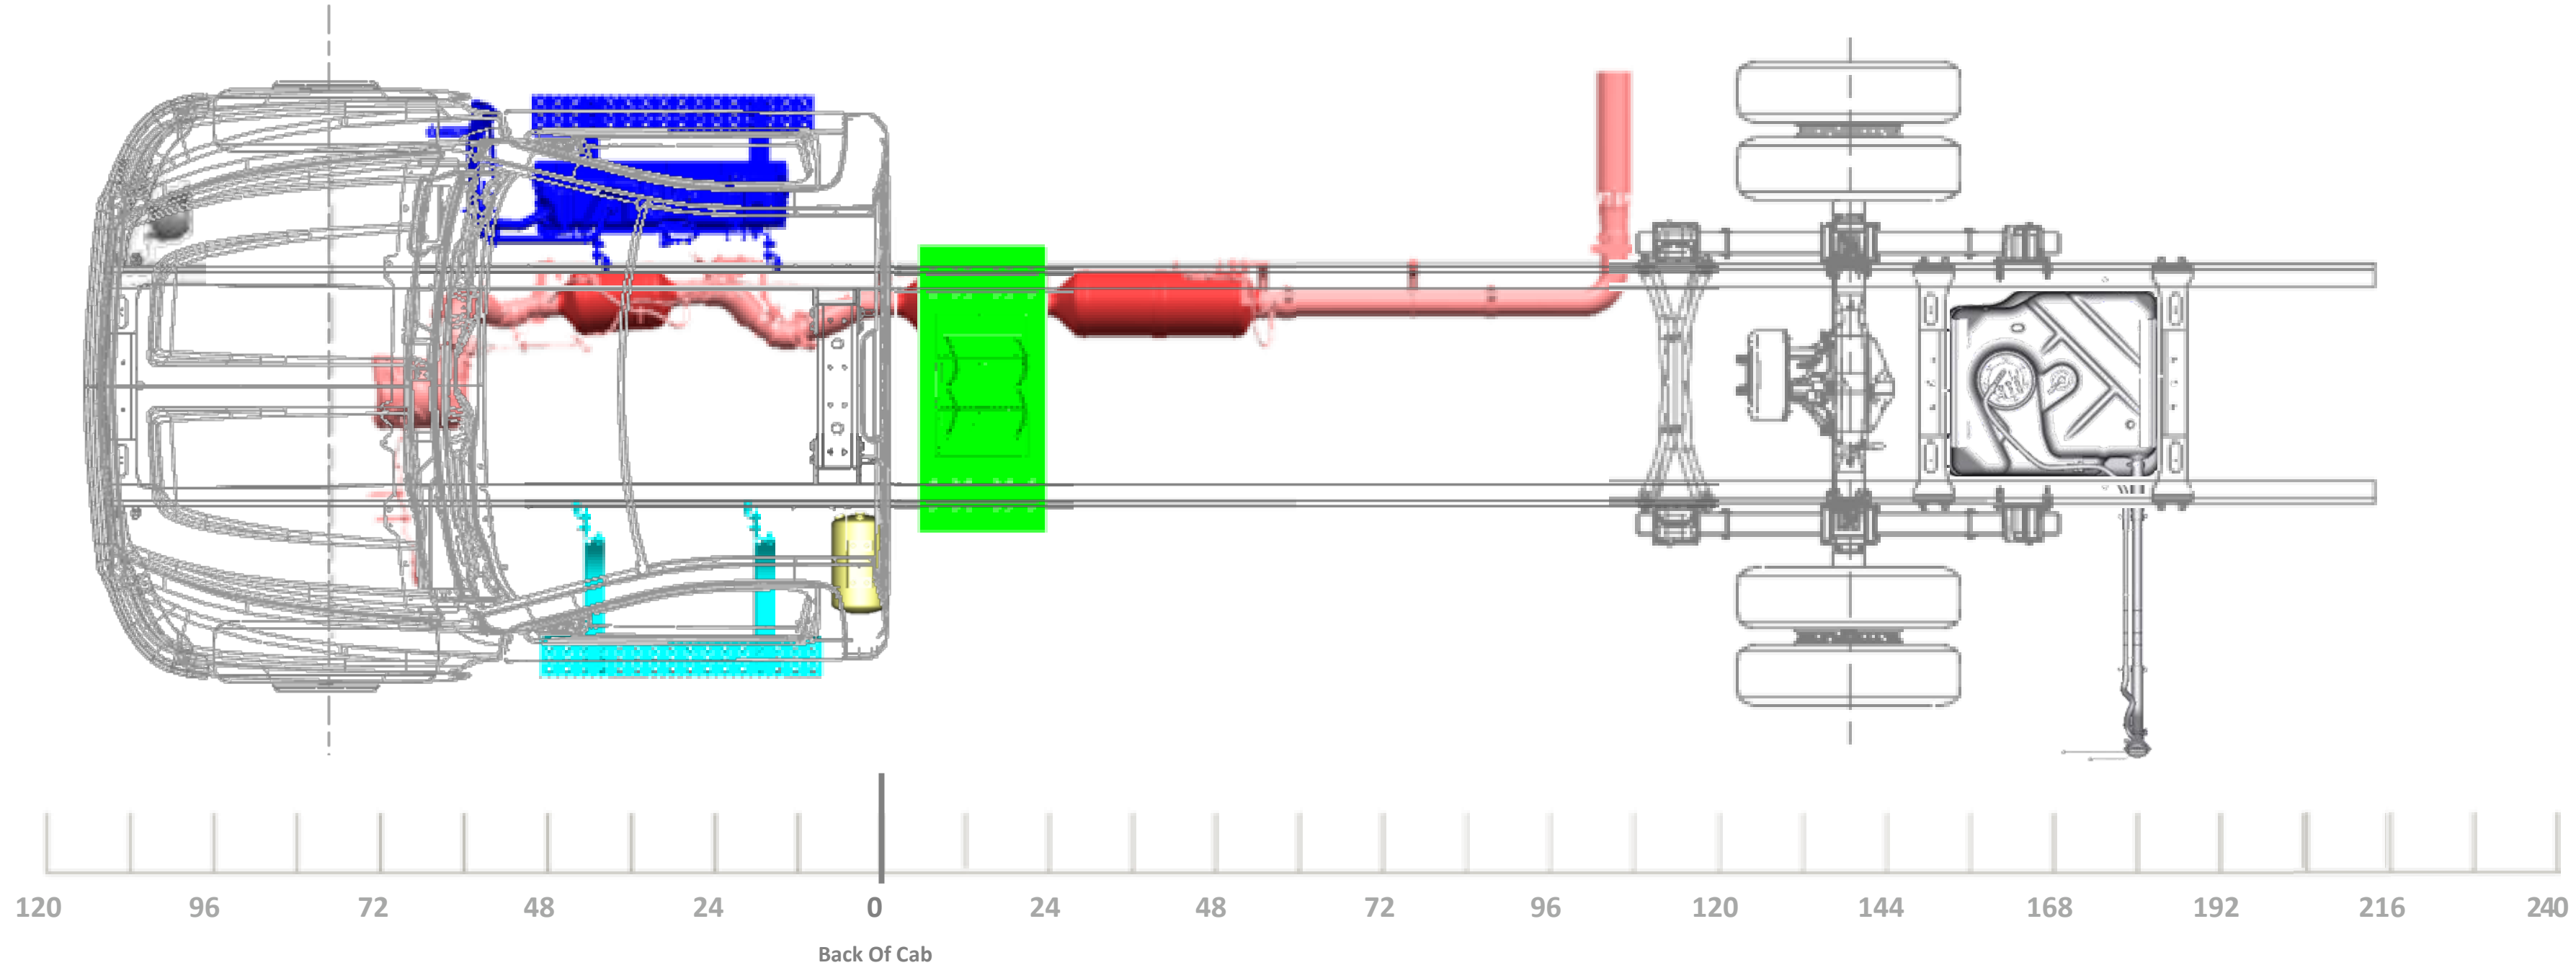
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

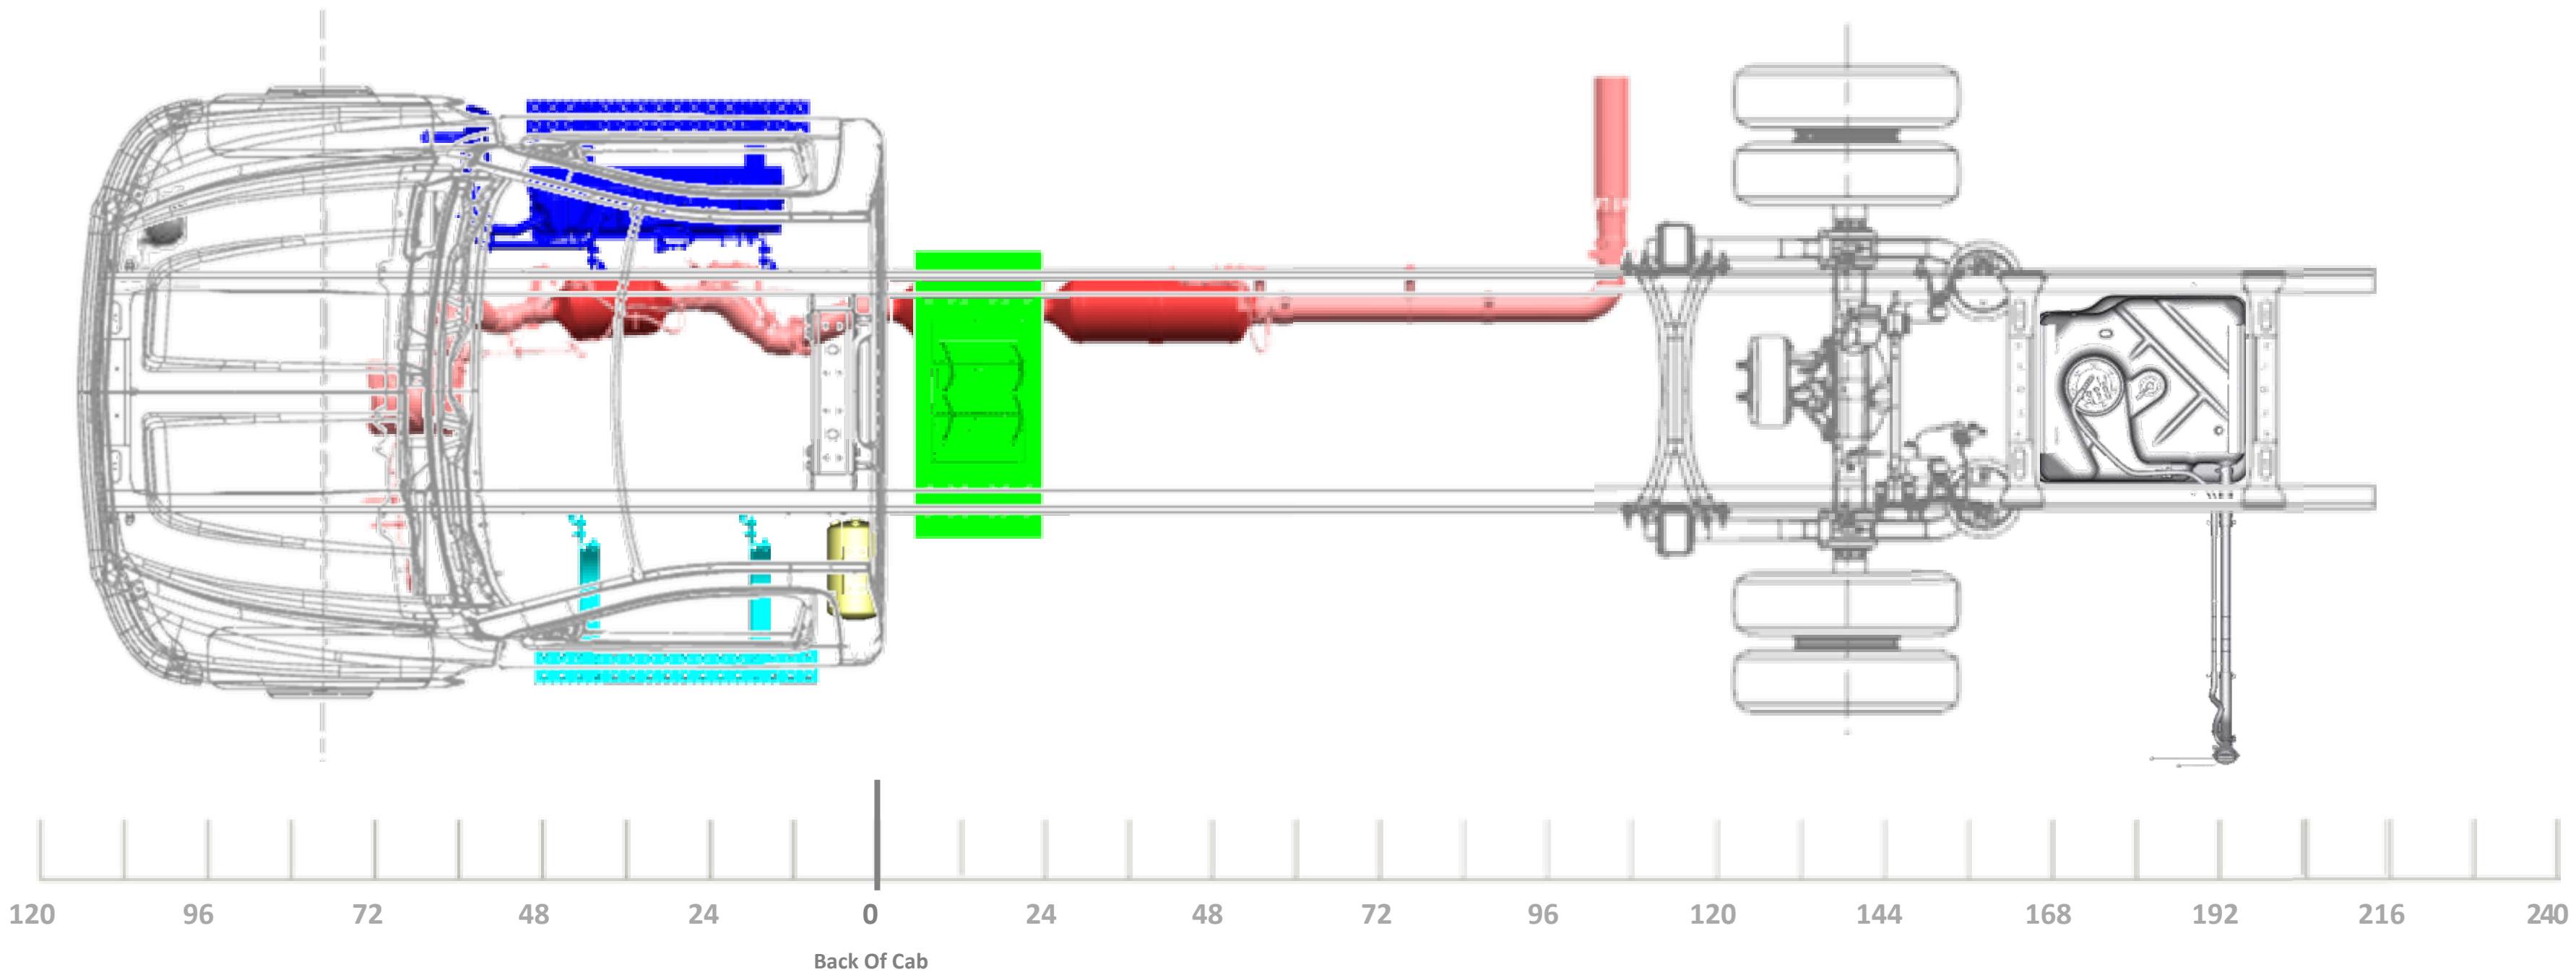
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION

VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)

75” AF

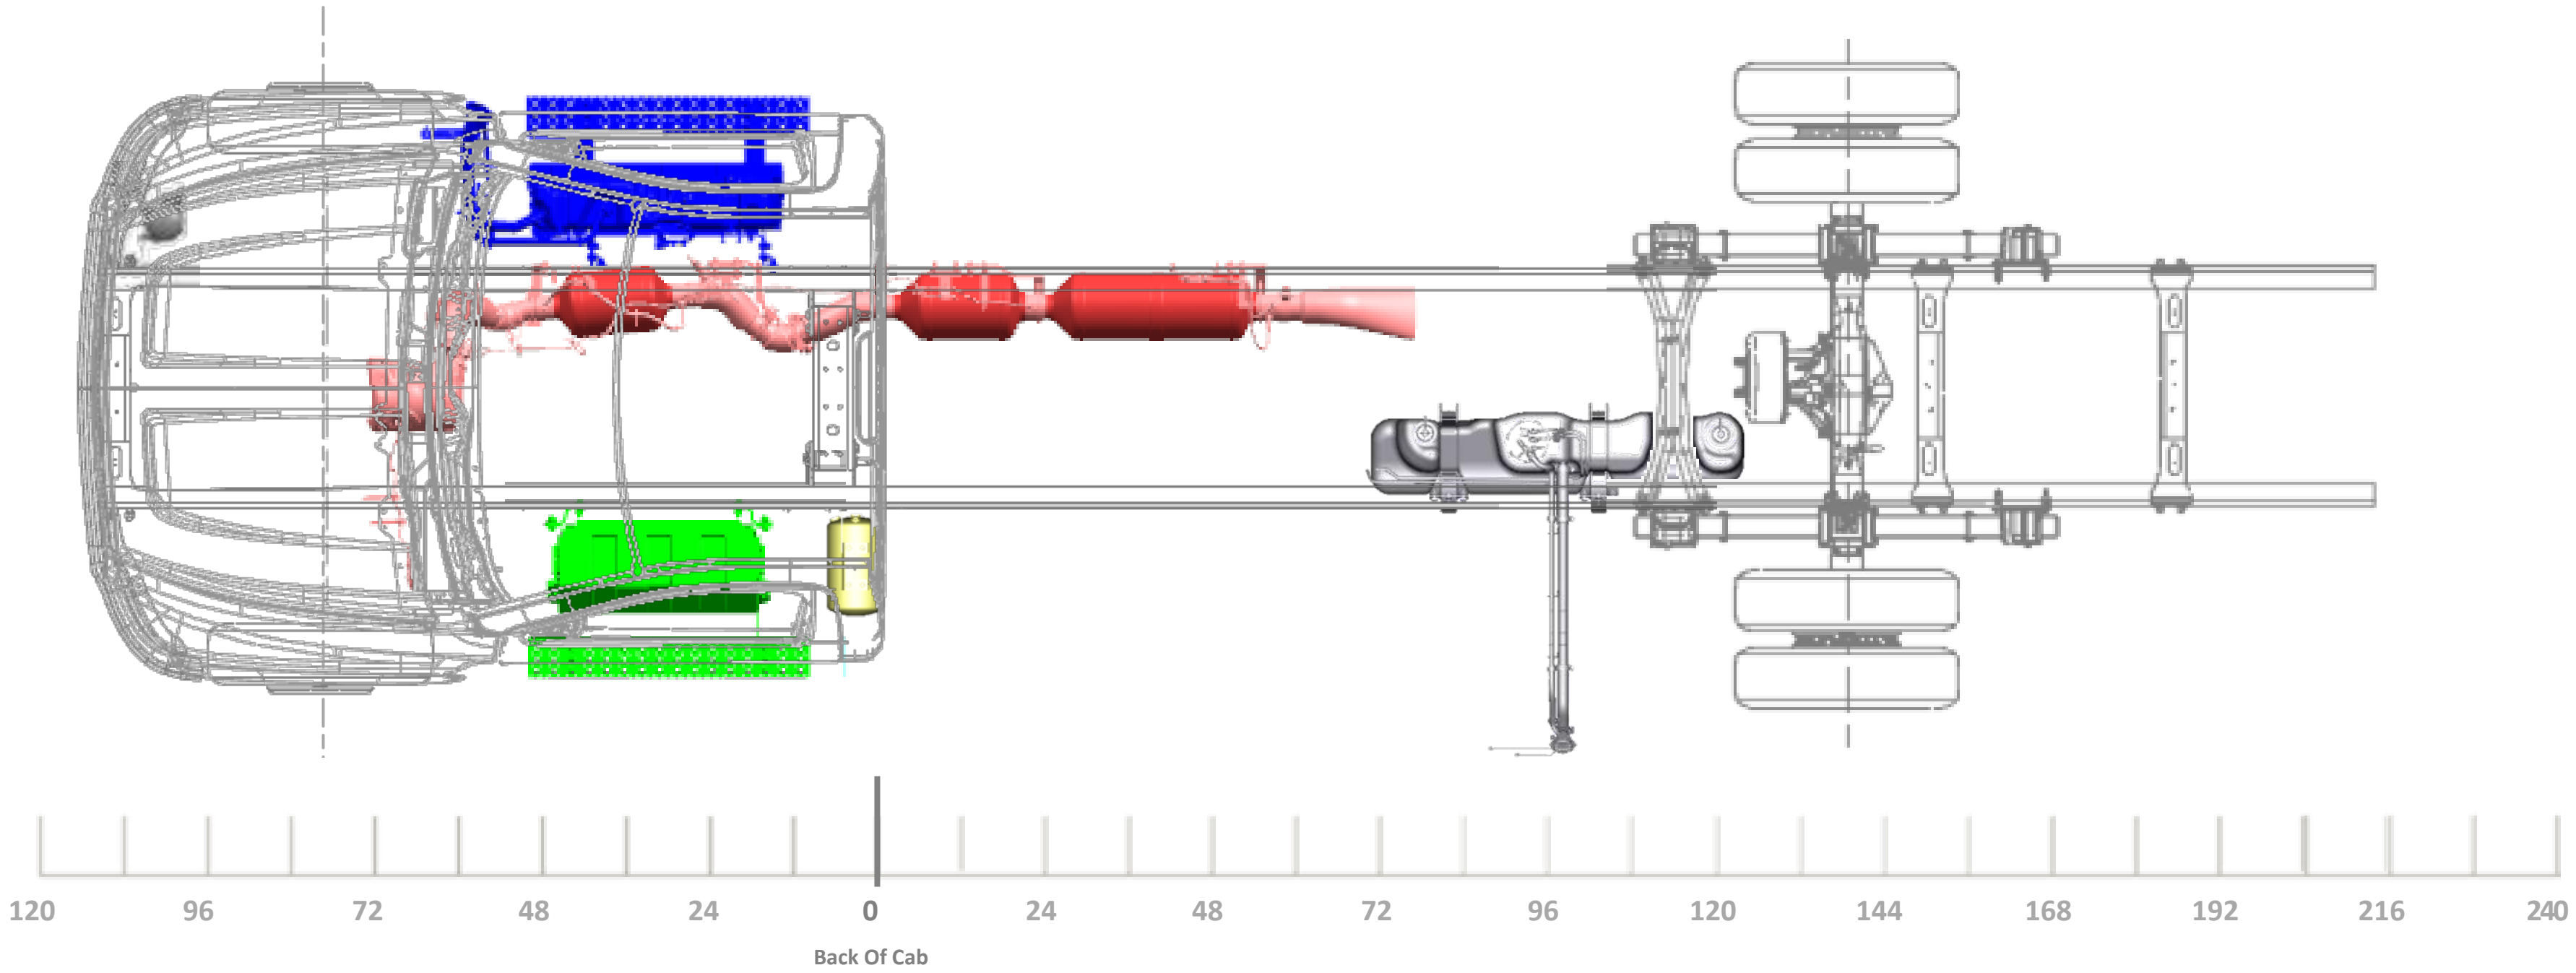

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION

REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)

75” AF

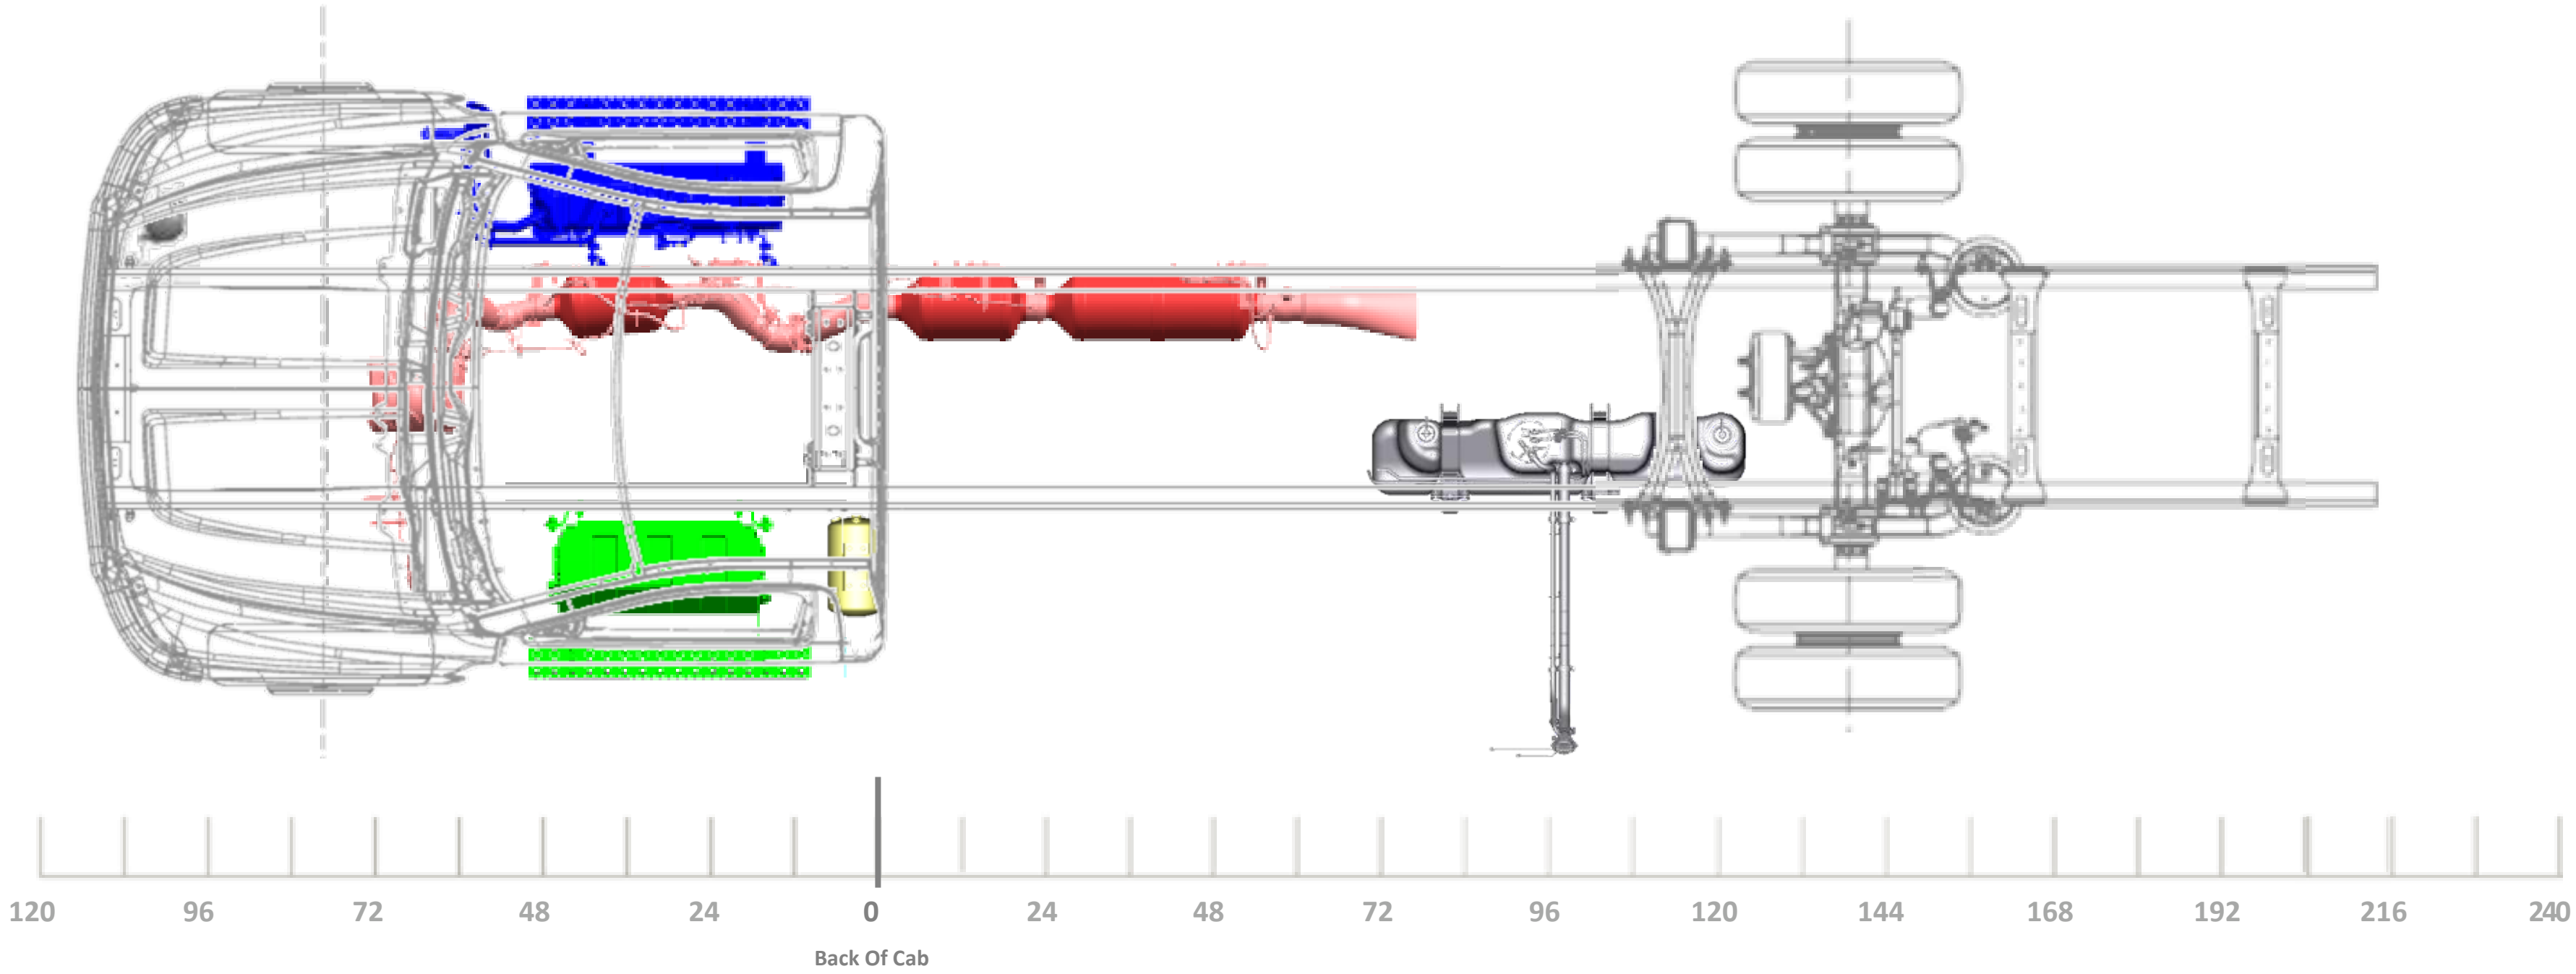
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

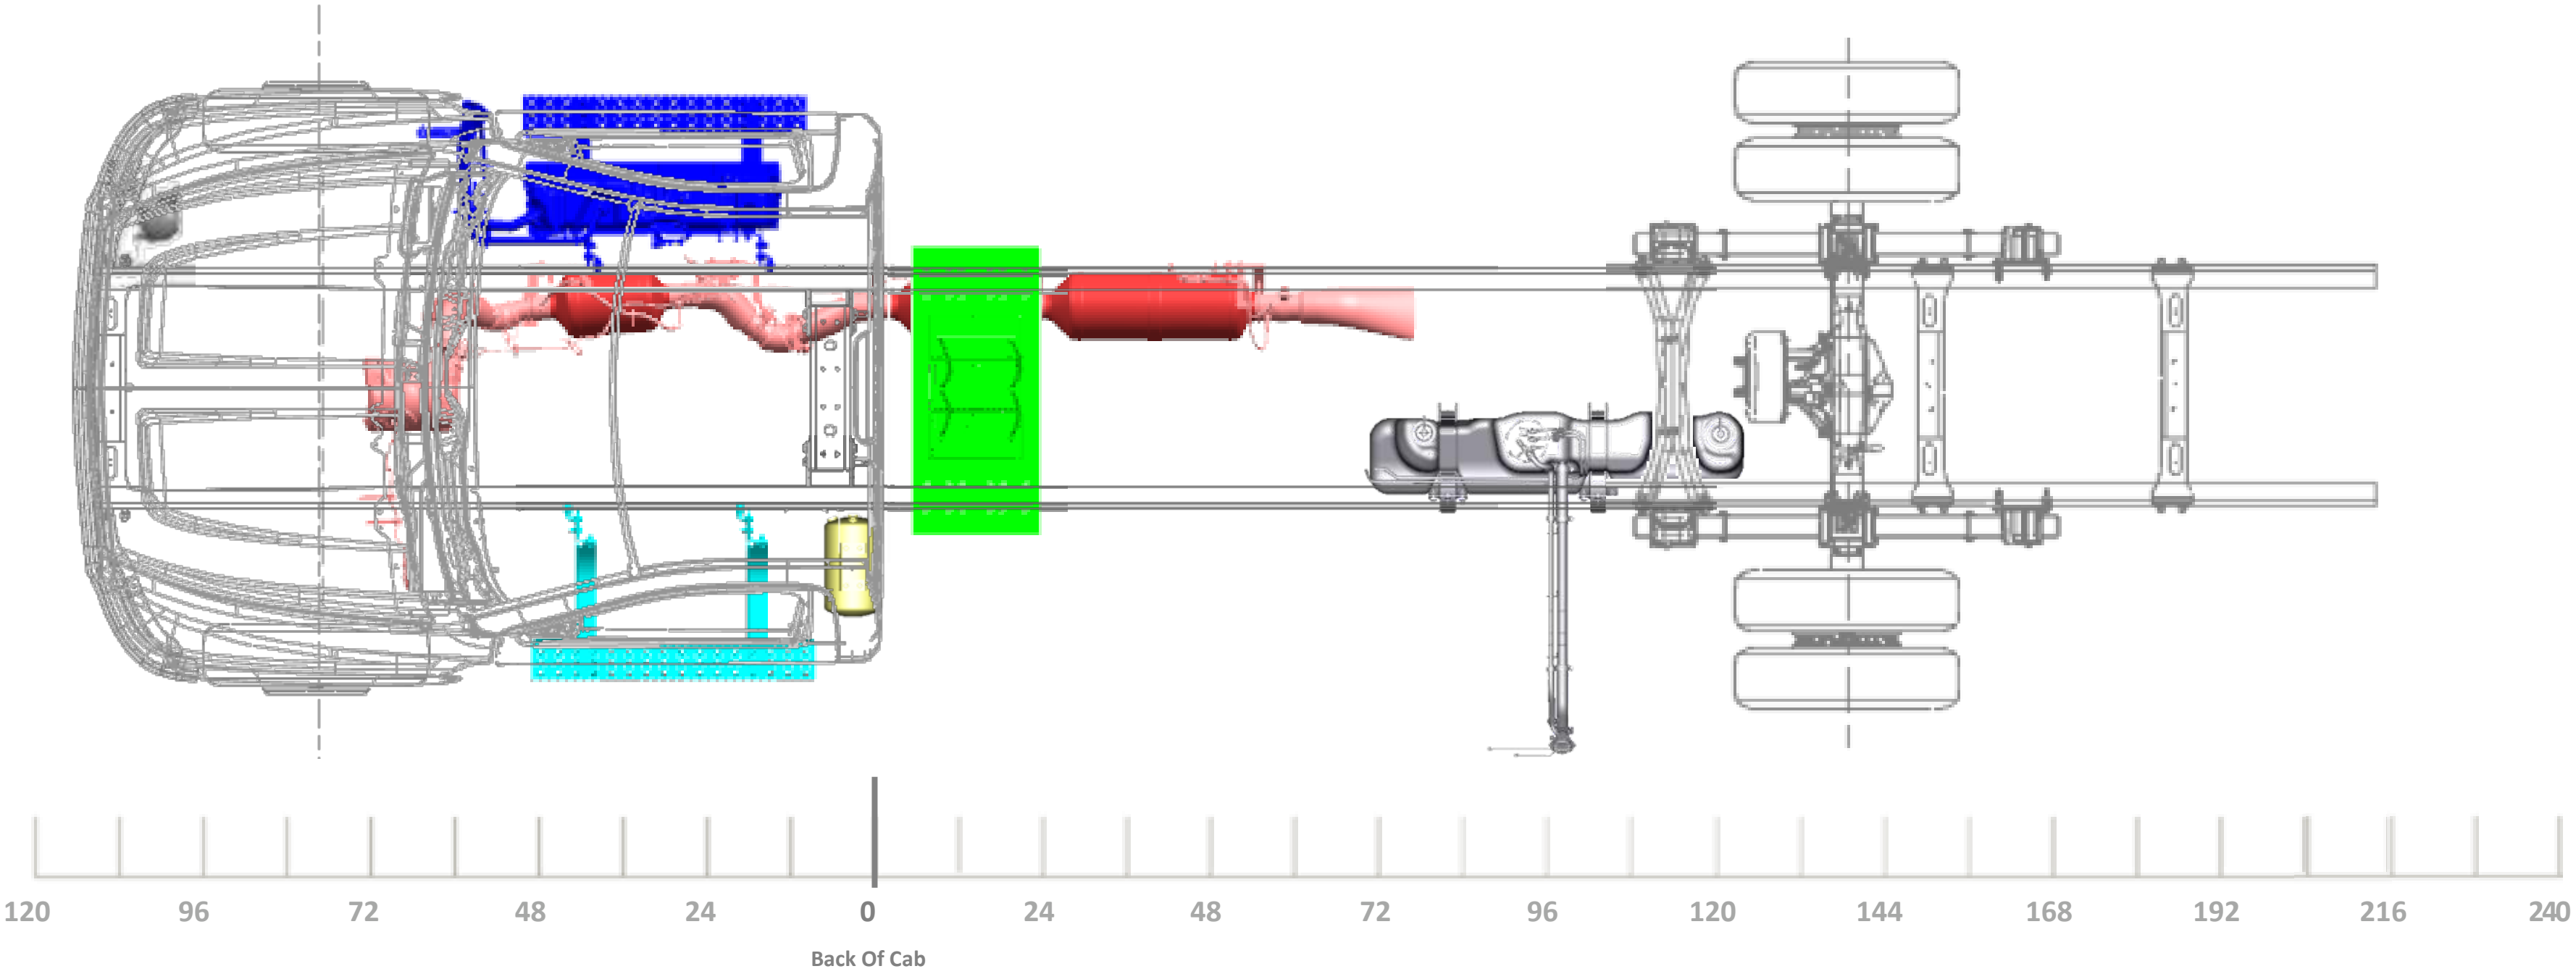
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

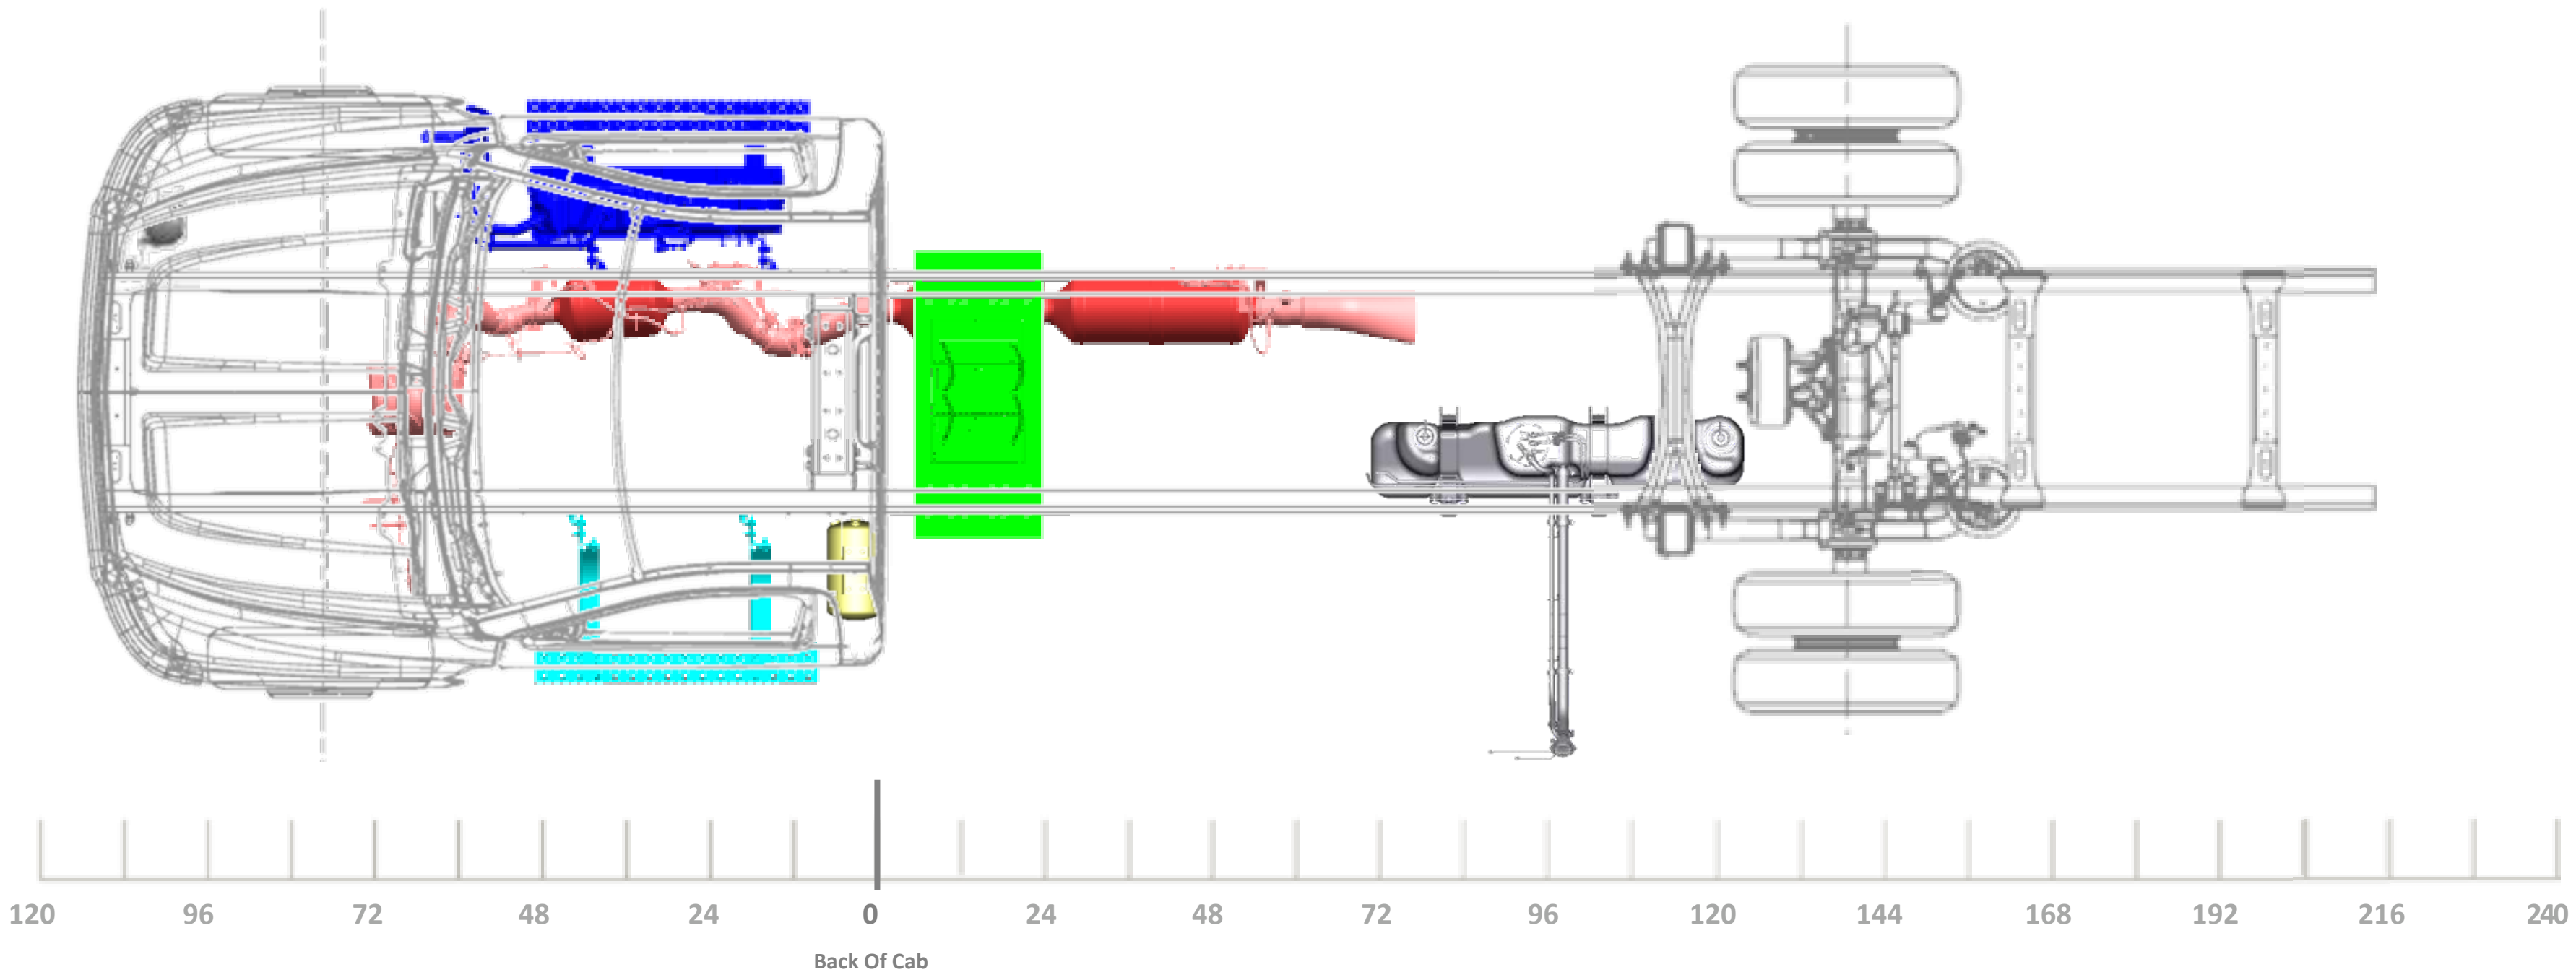
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

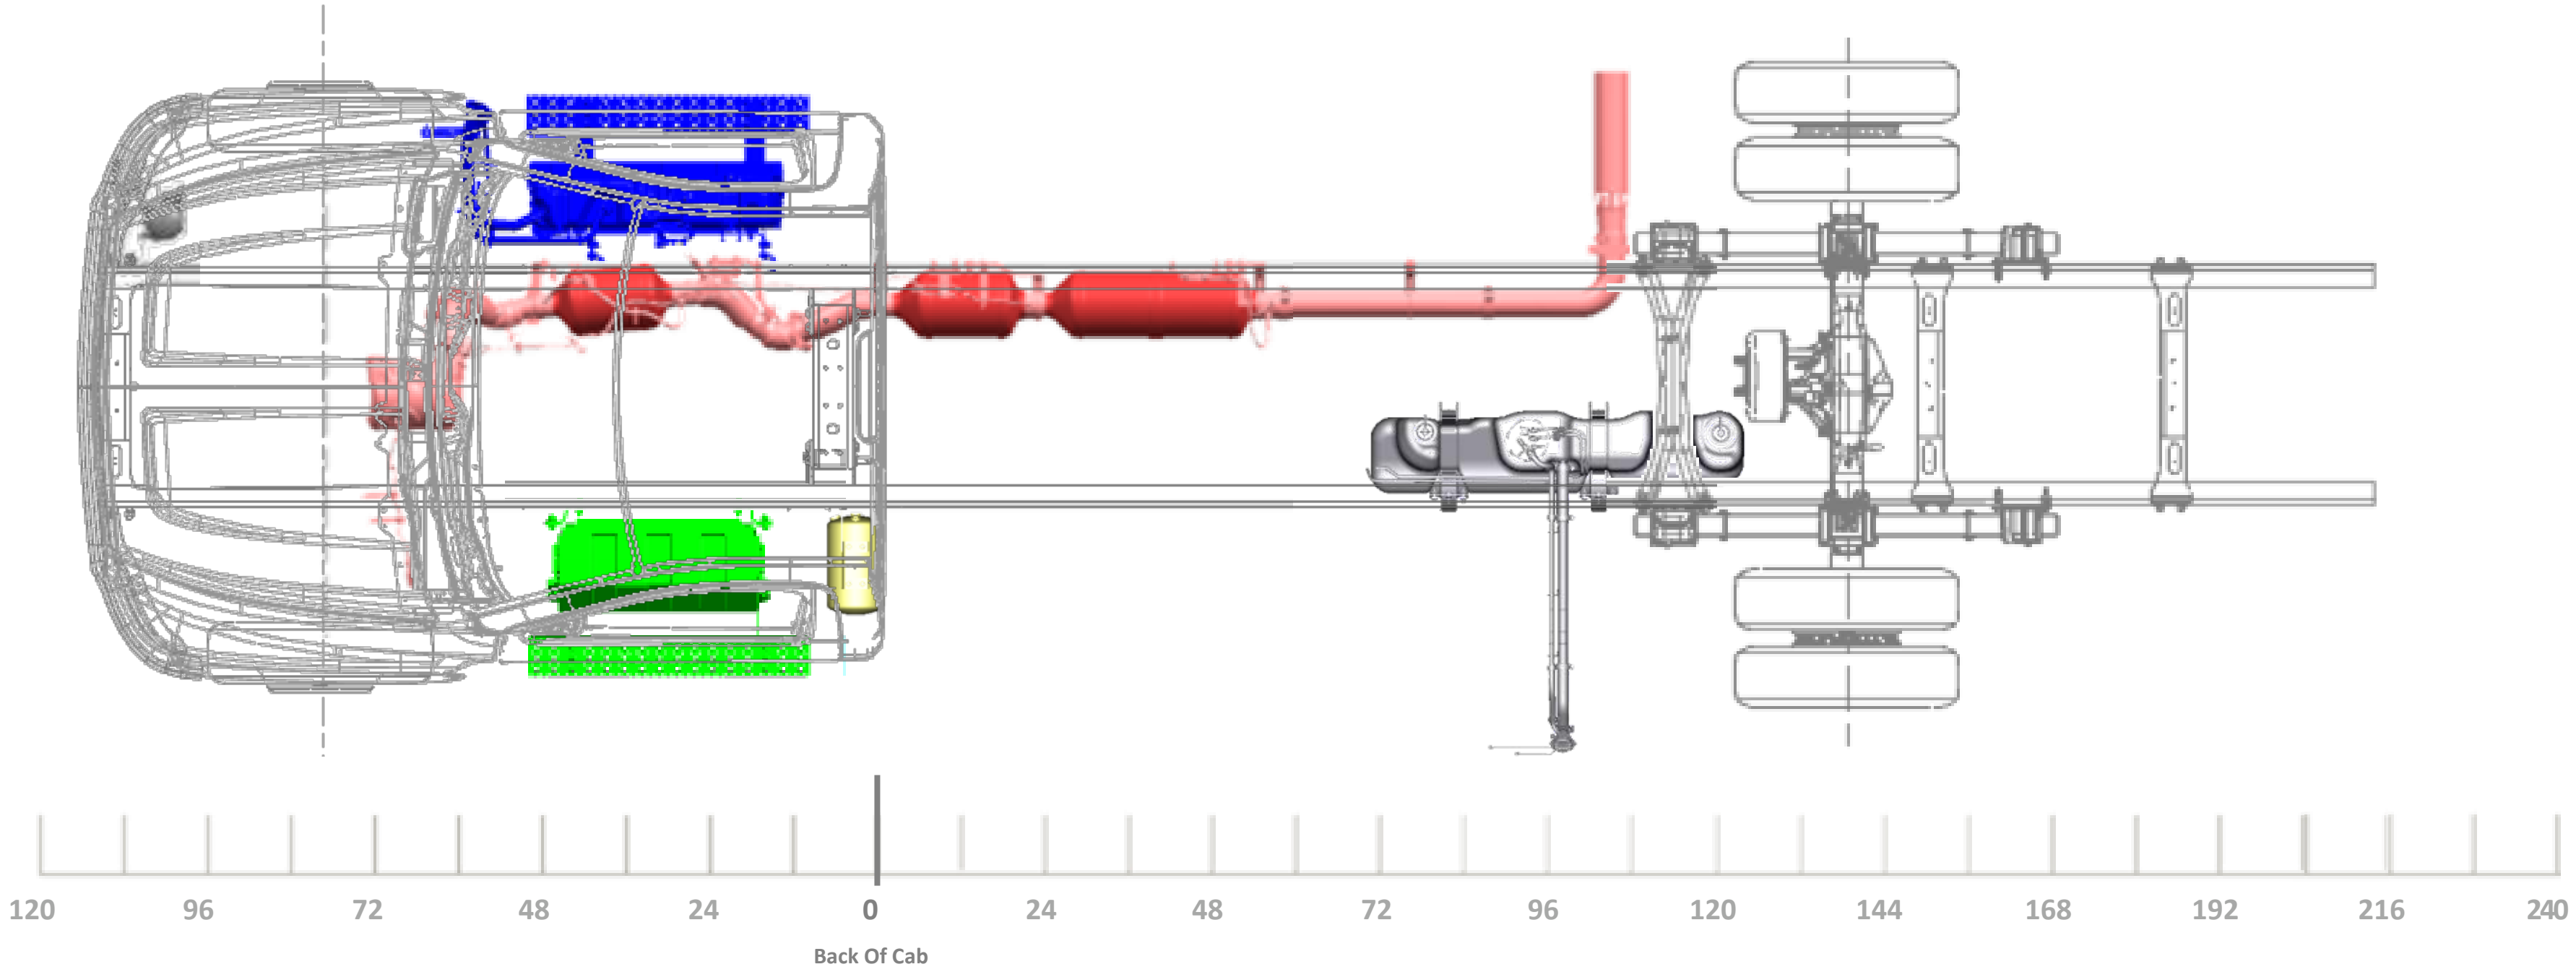
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

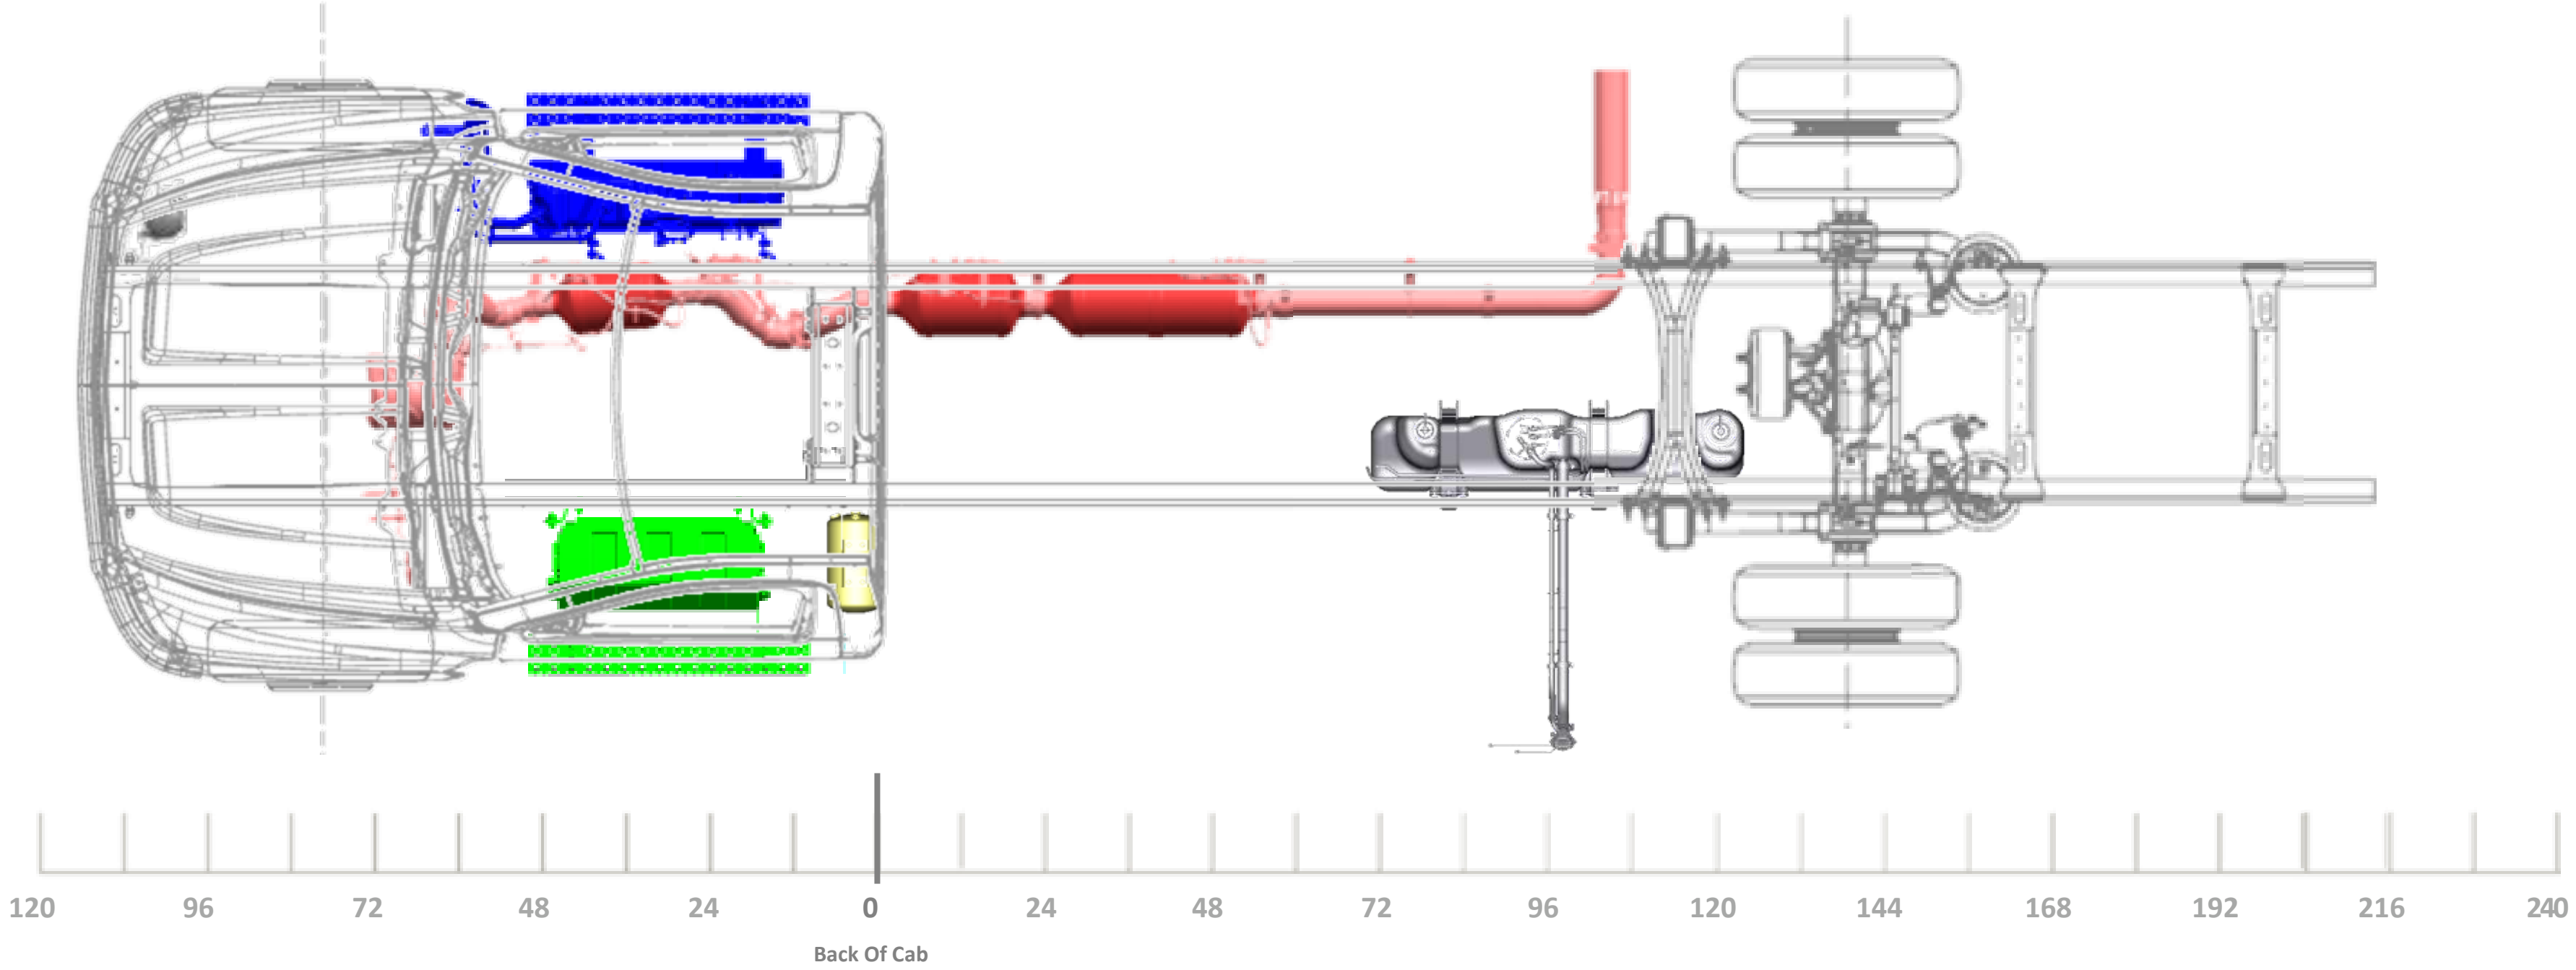
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

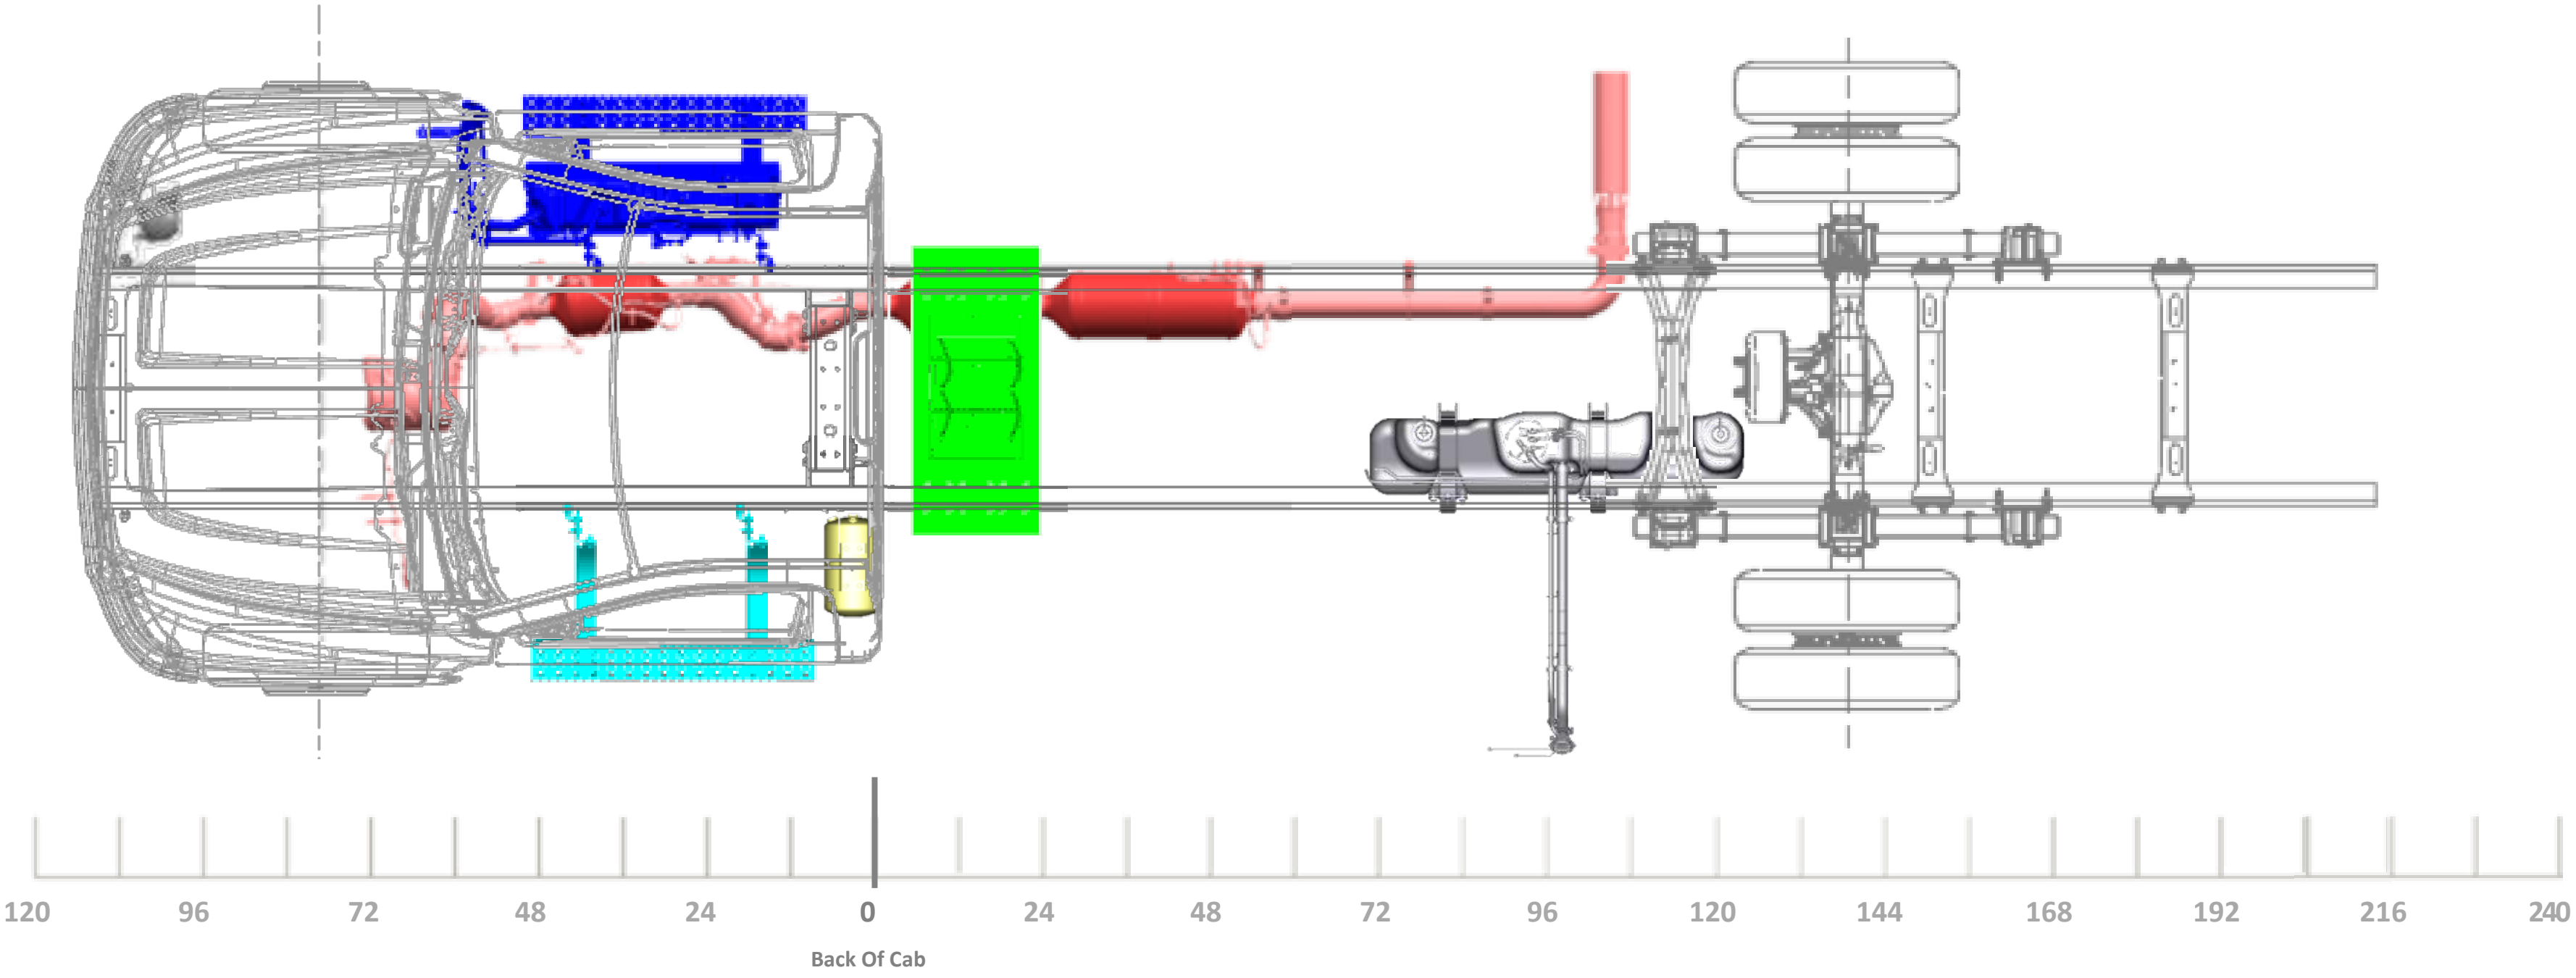

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

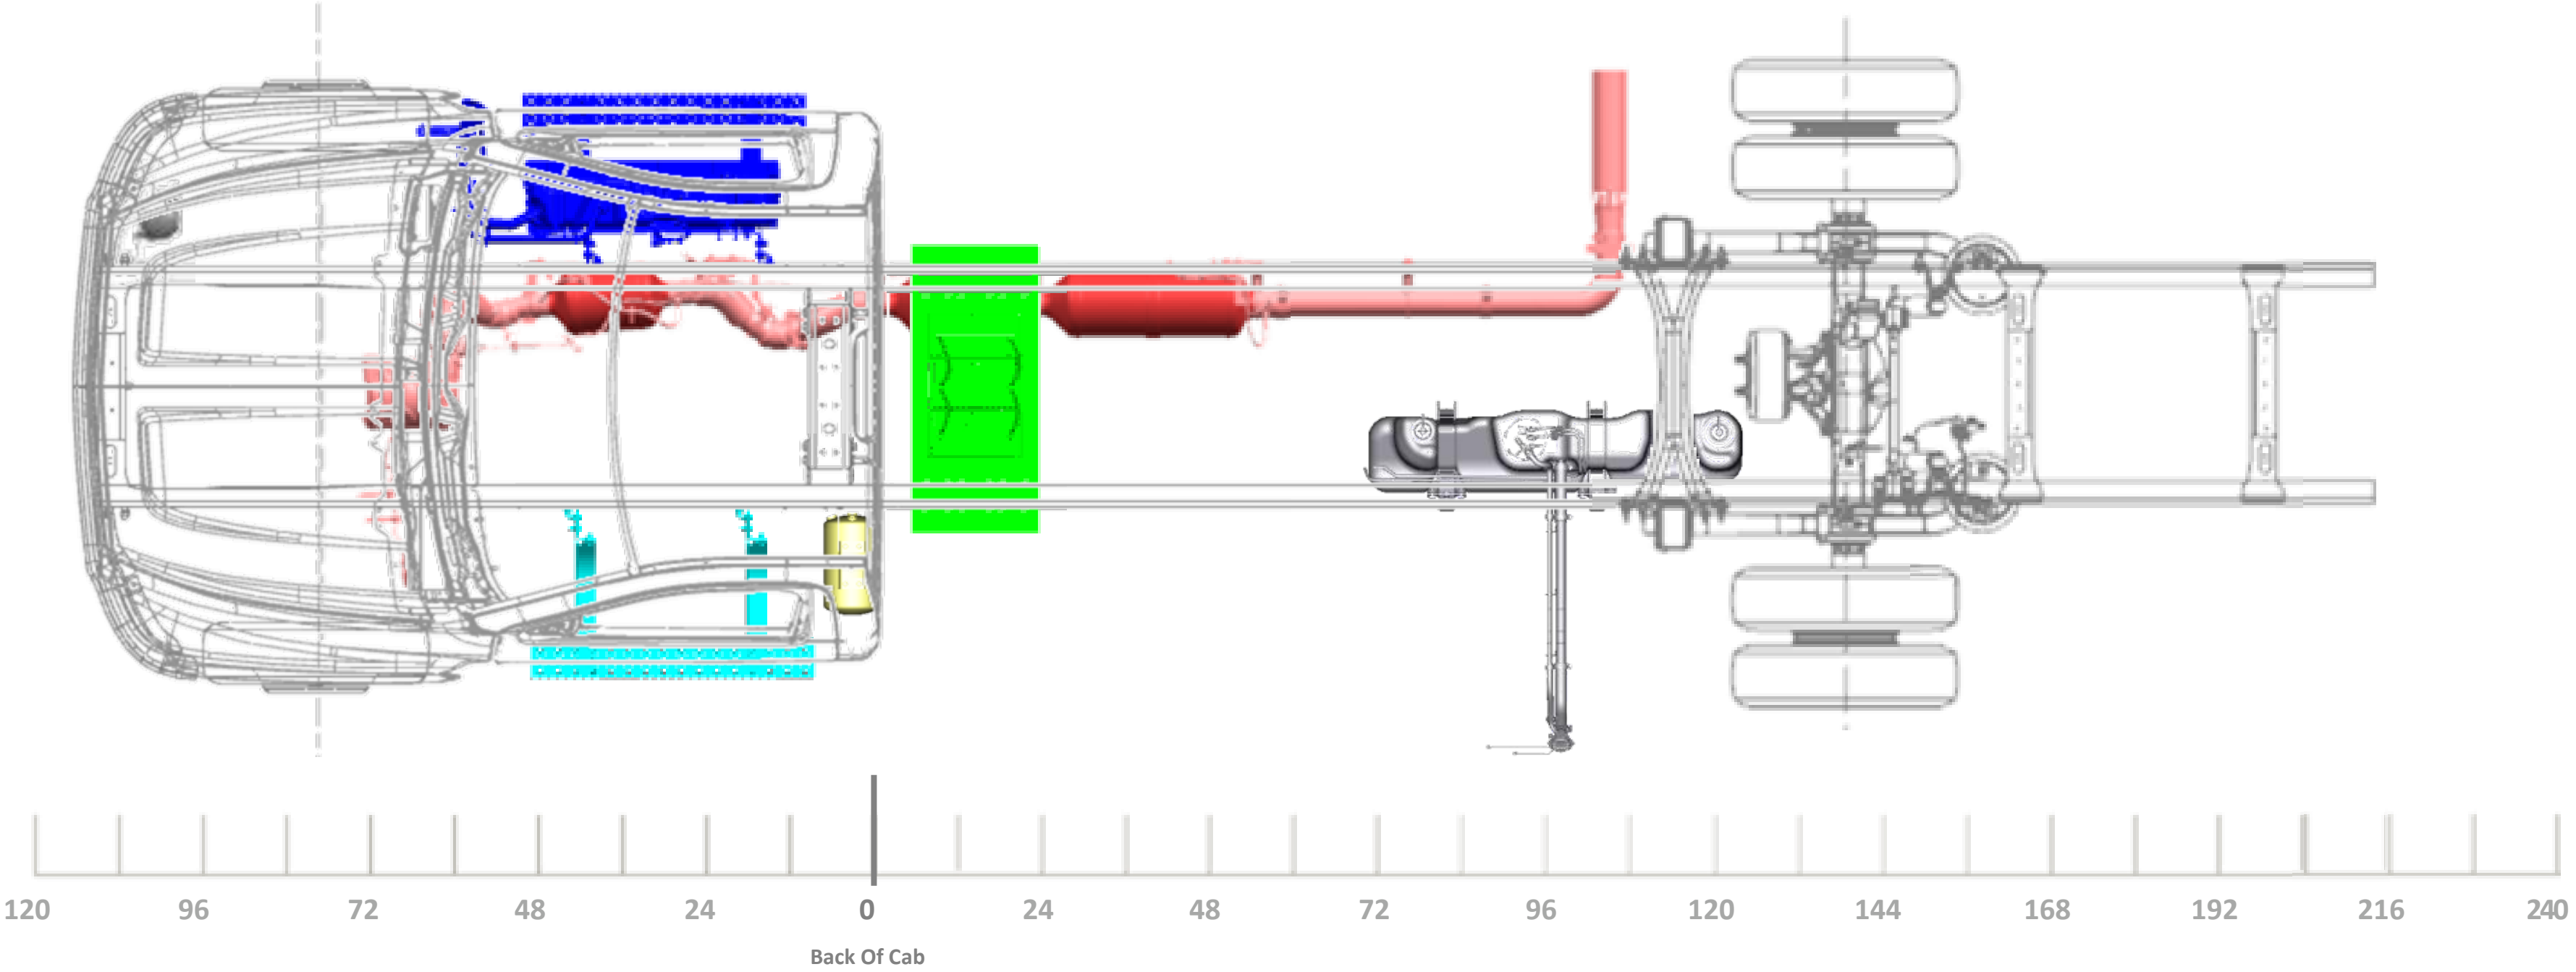
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

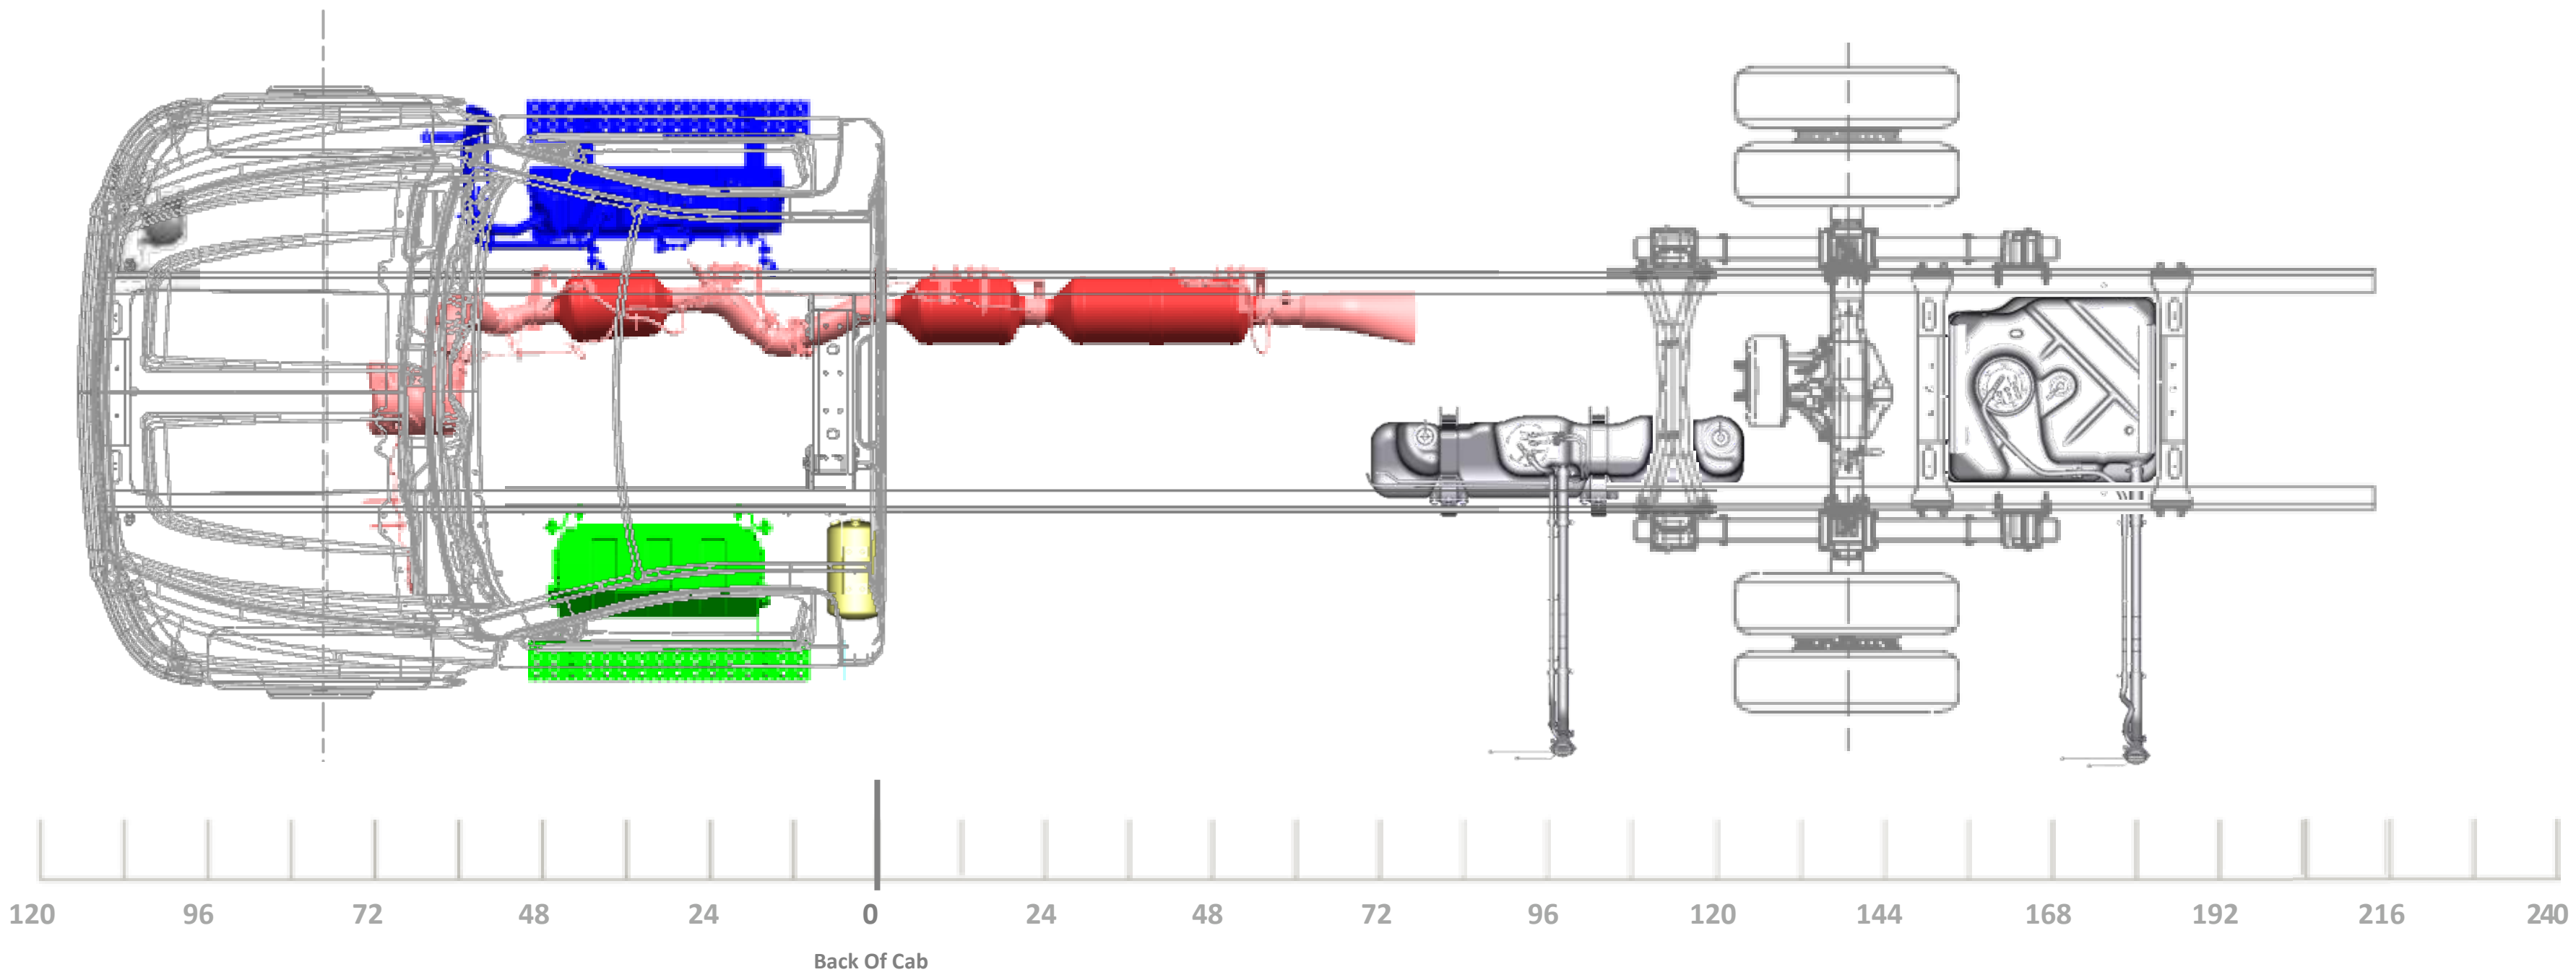
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

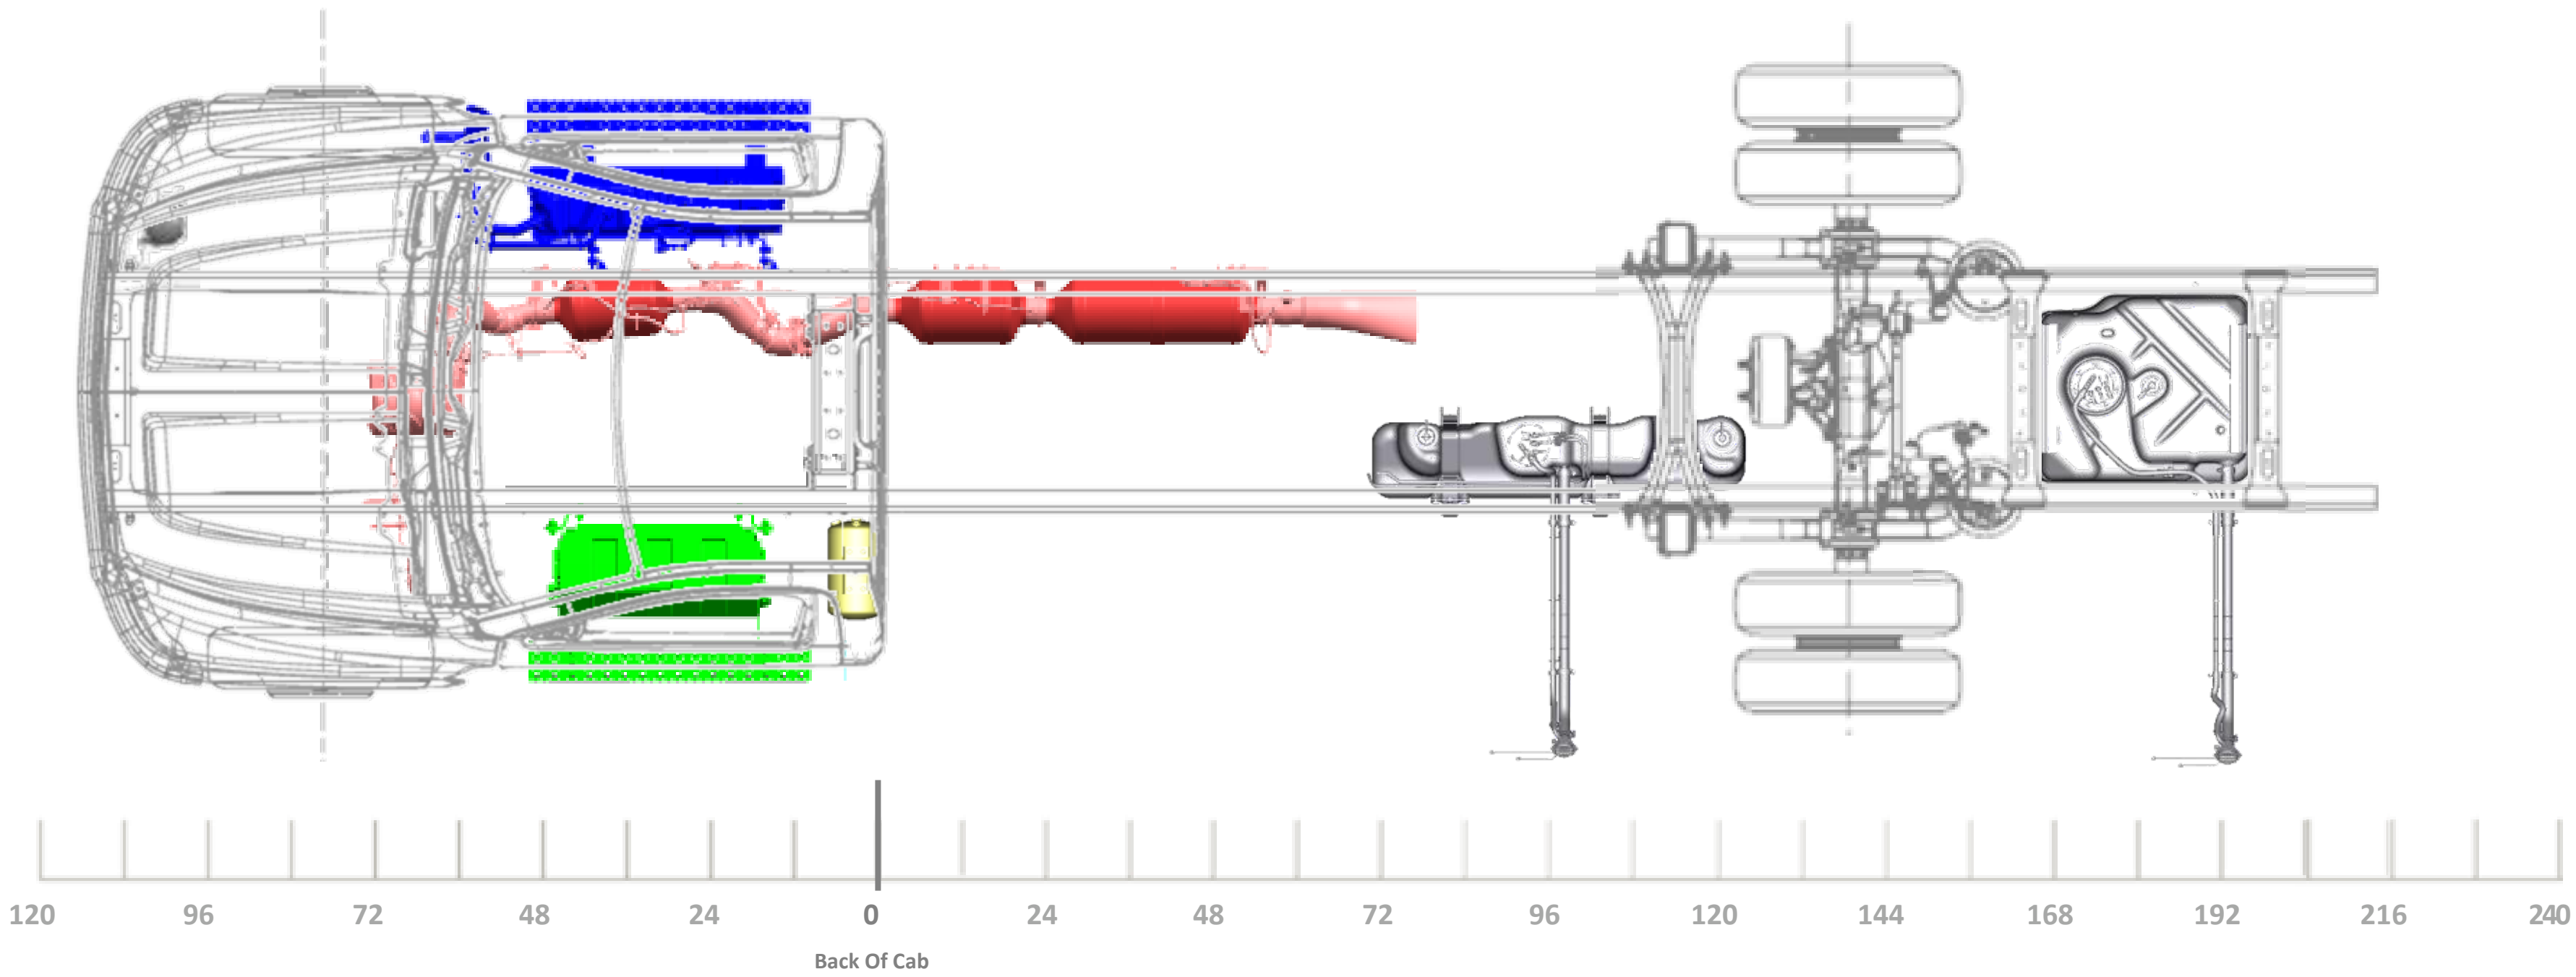
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION

VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)

75” AF

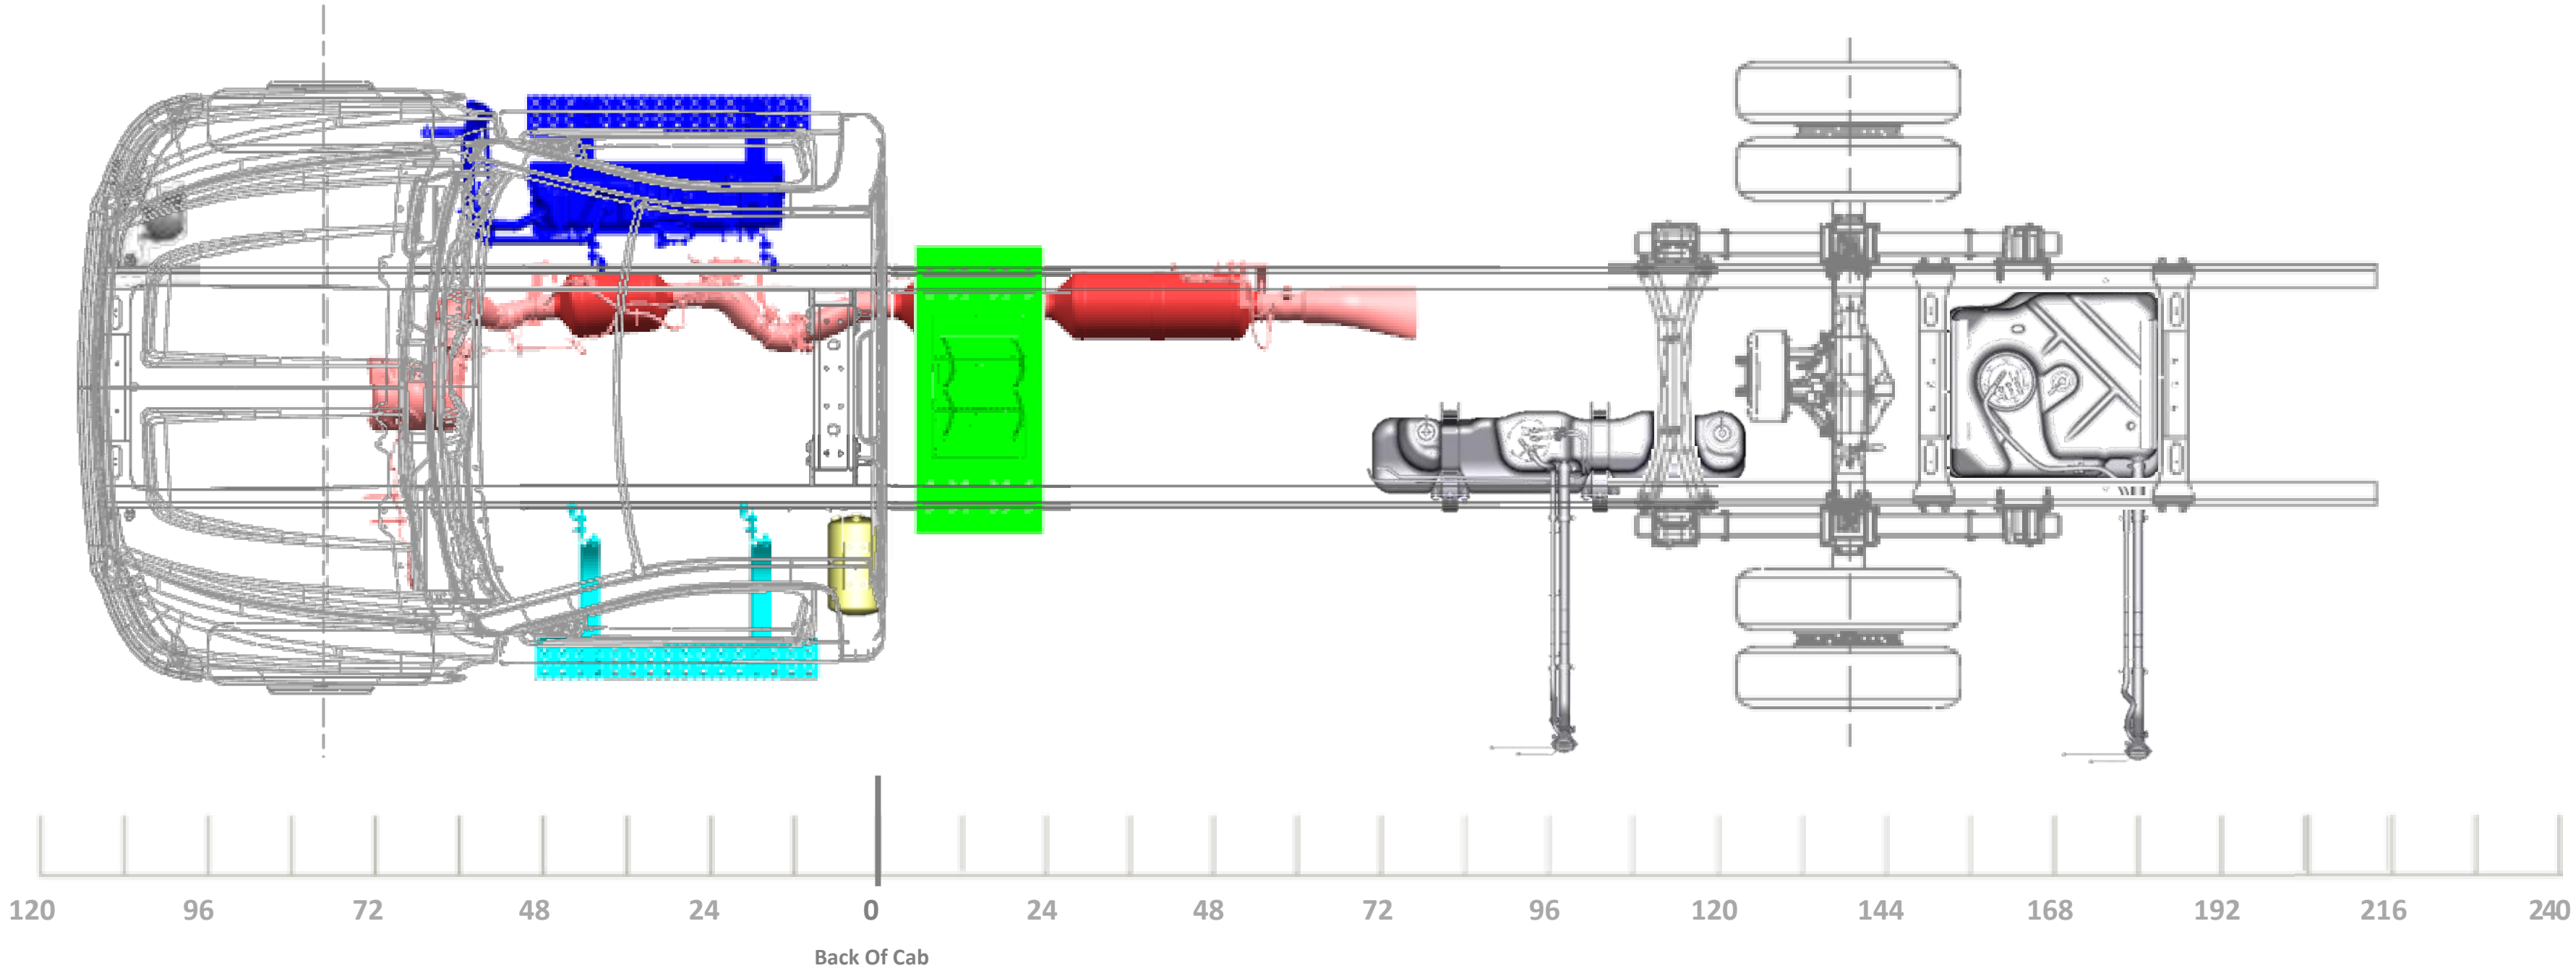
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

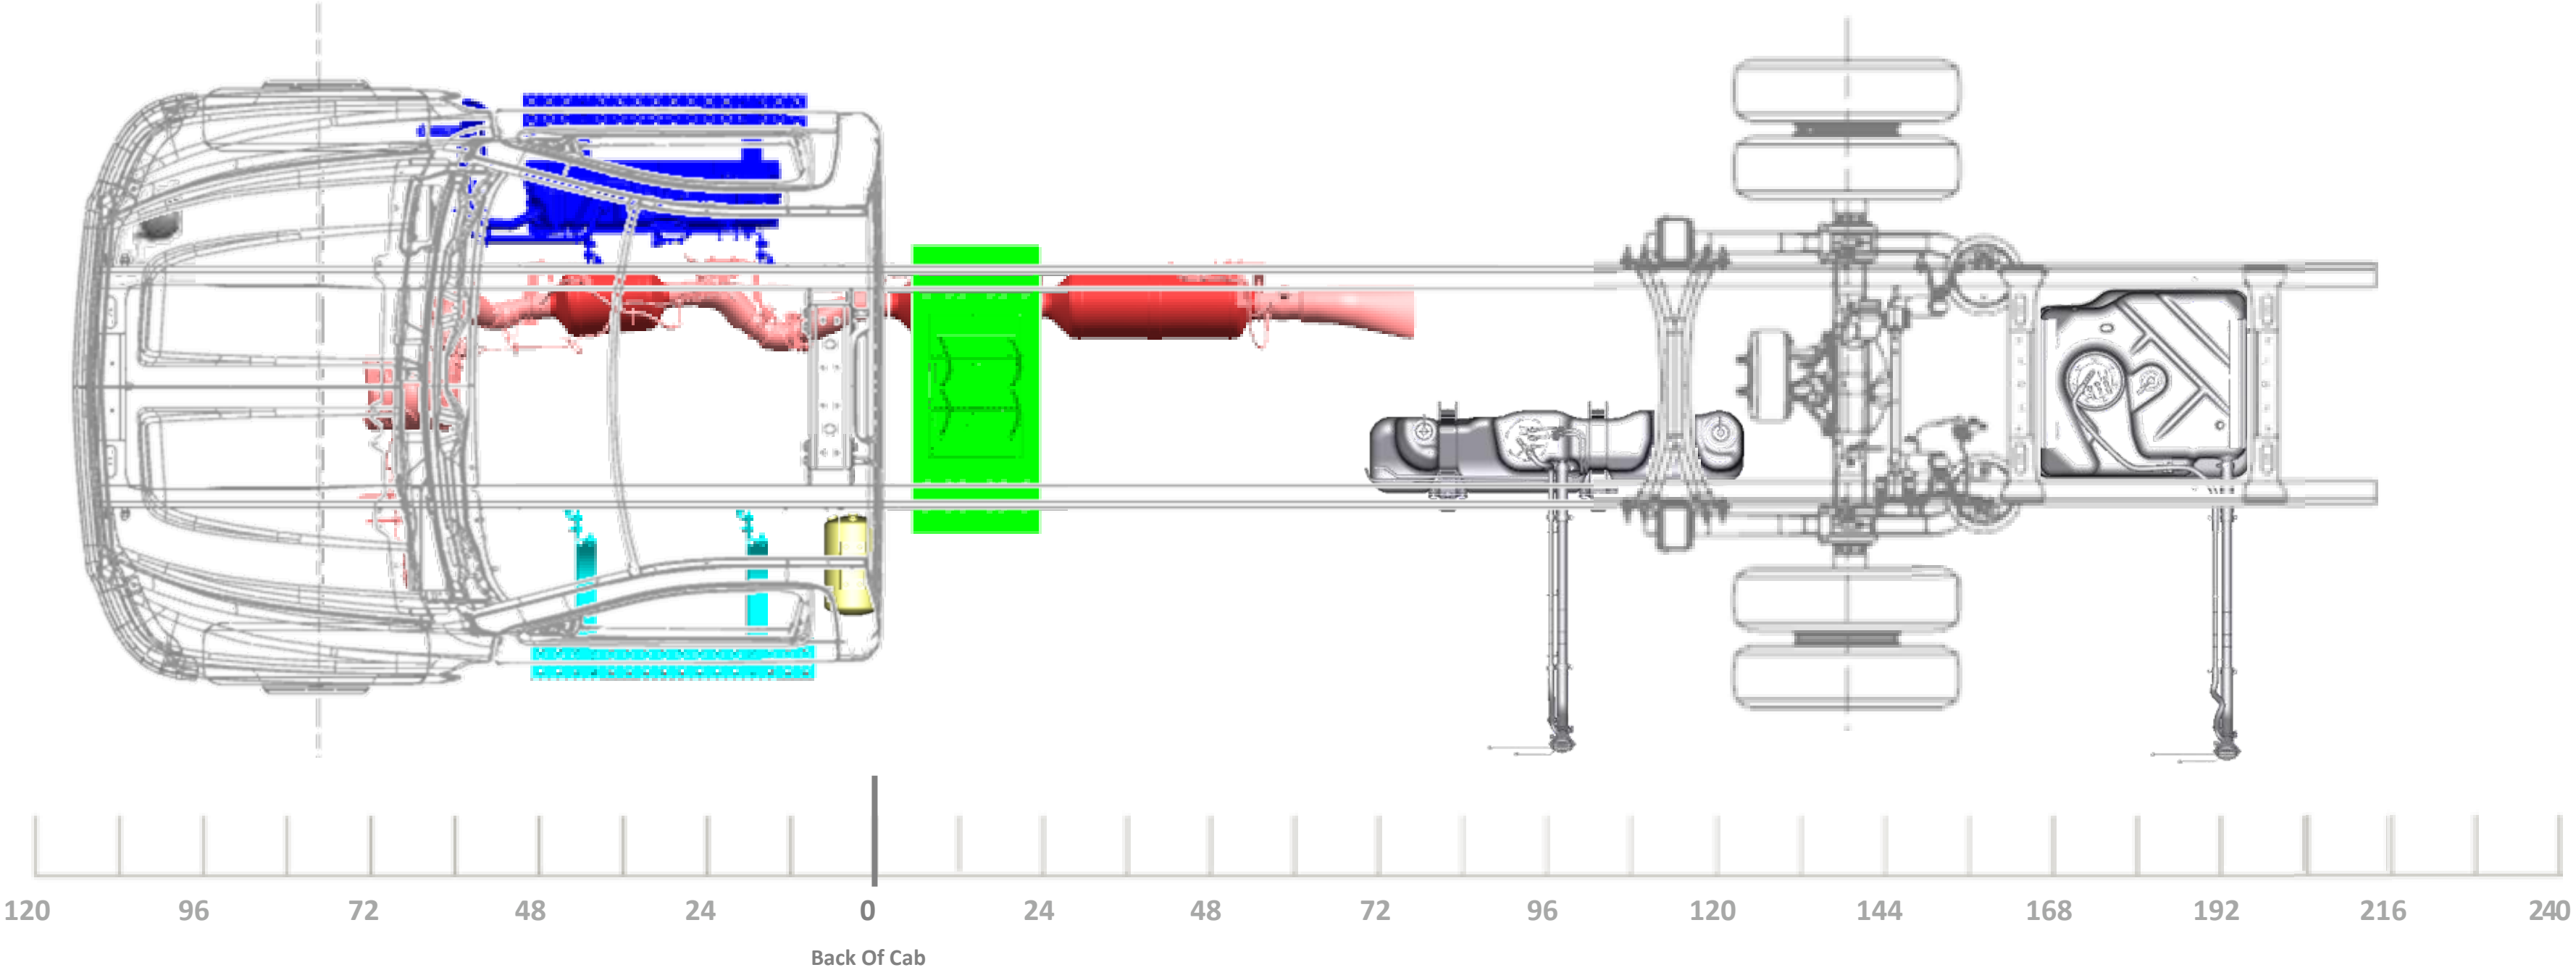

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

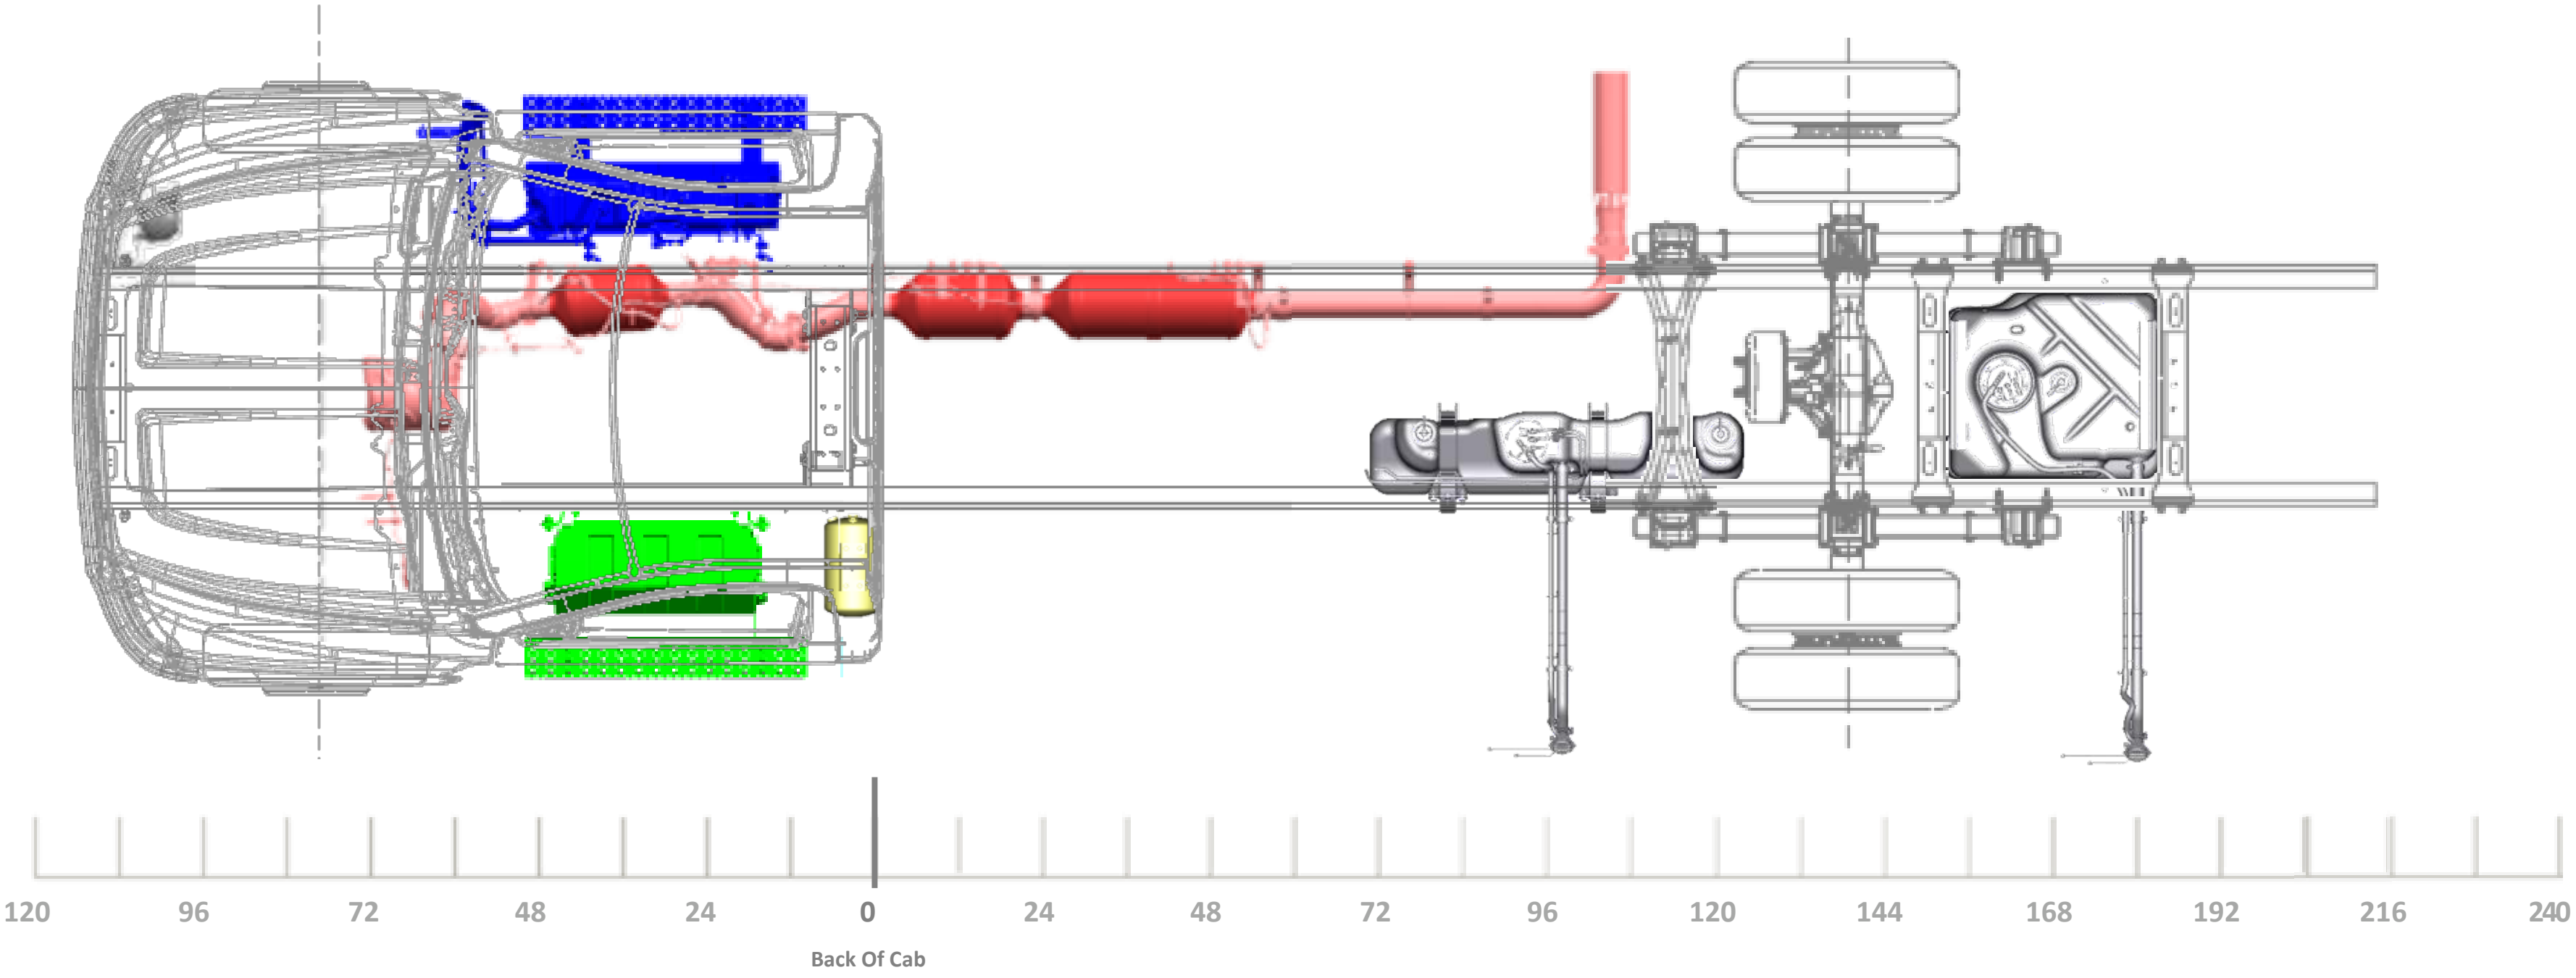
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

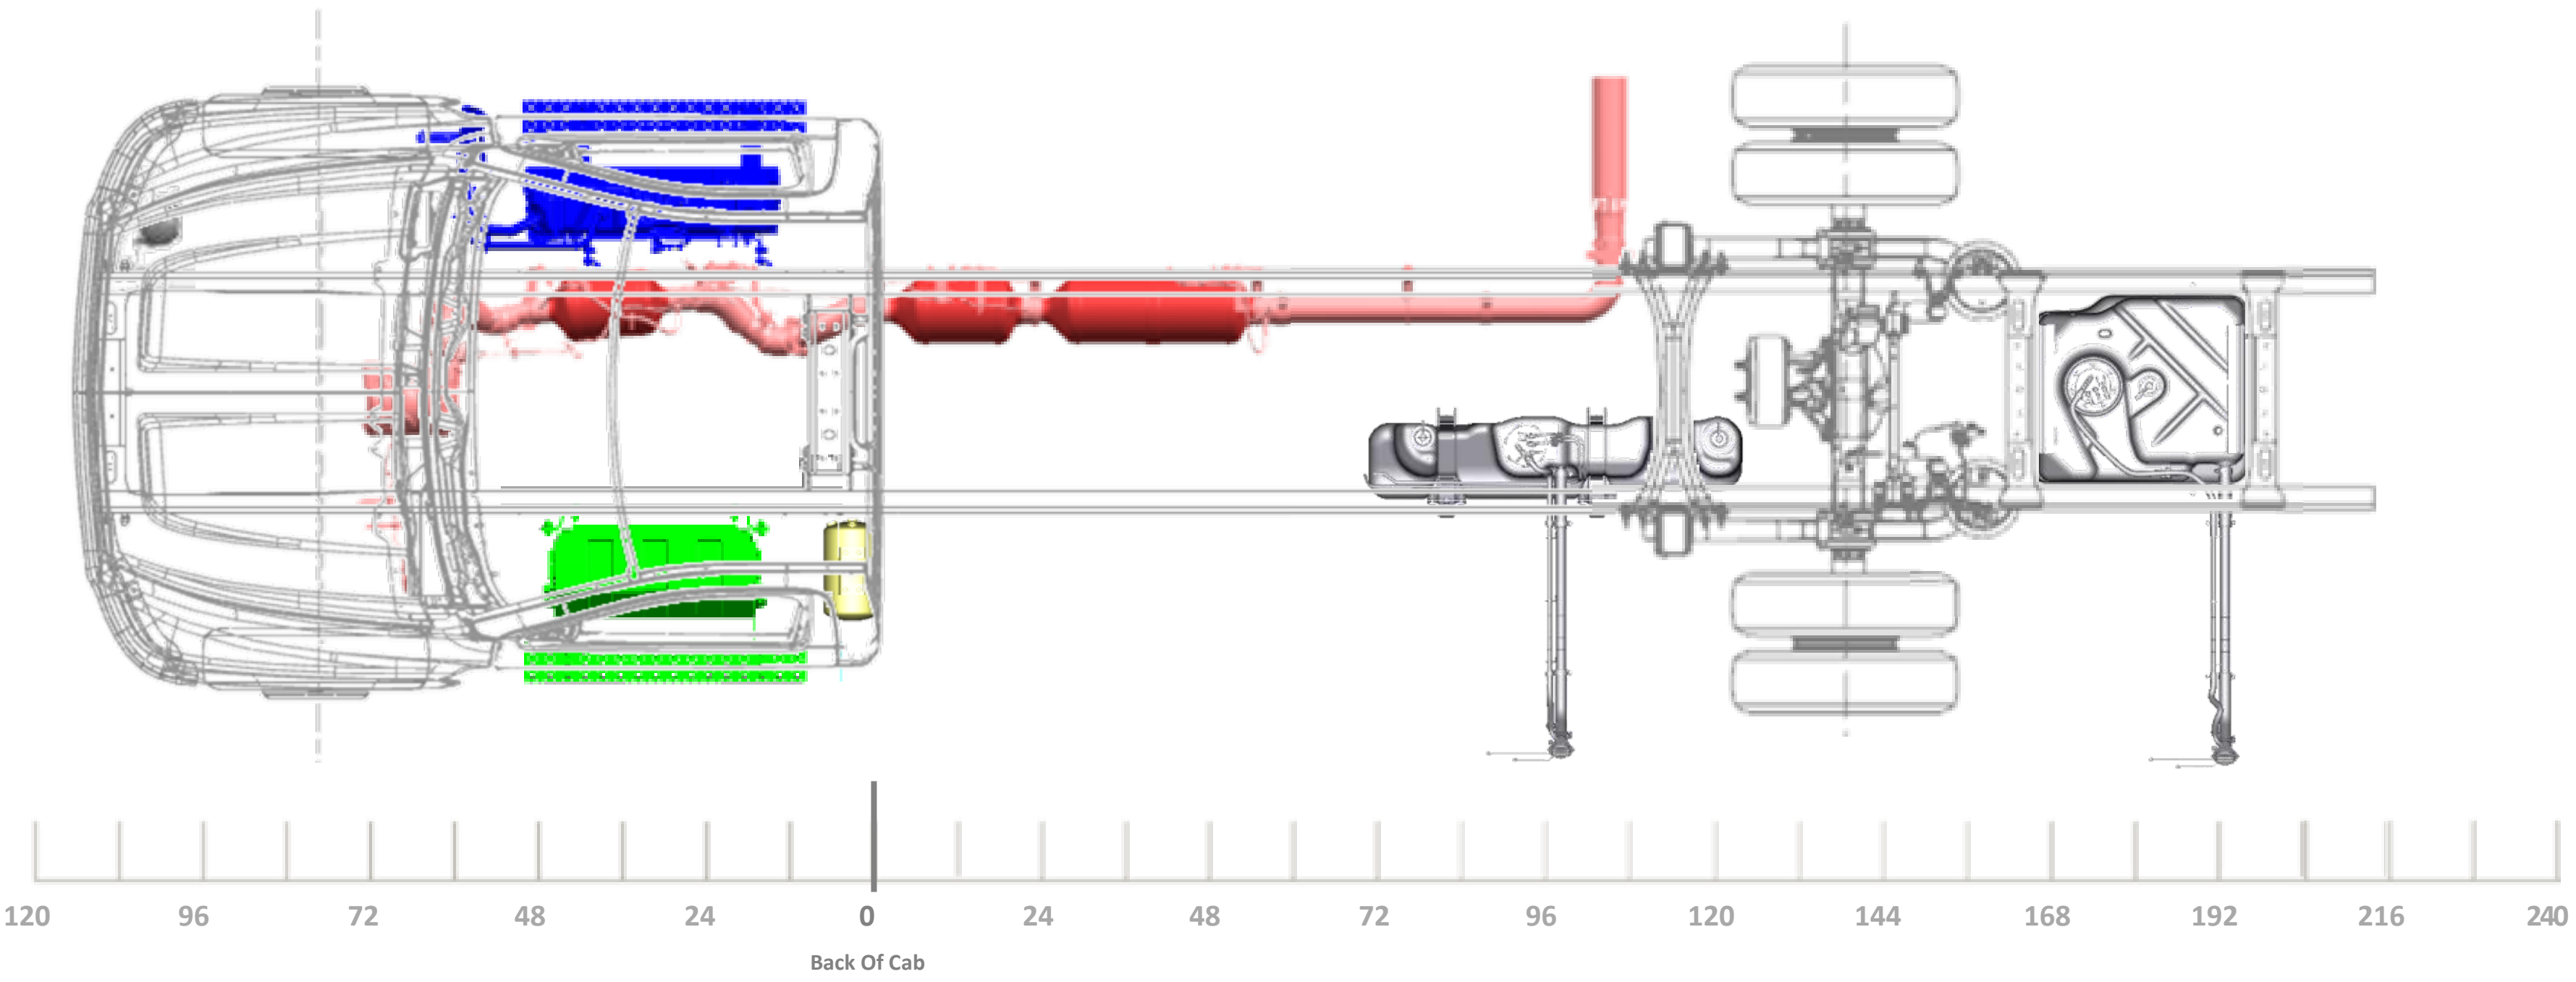
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

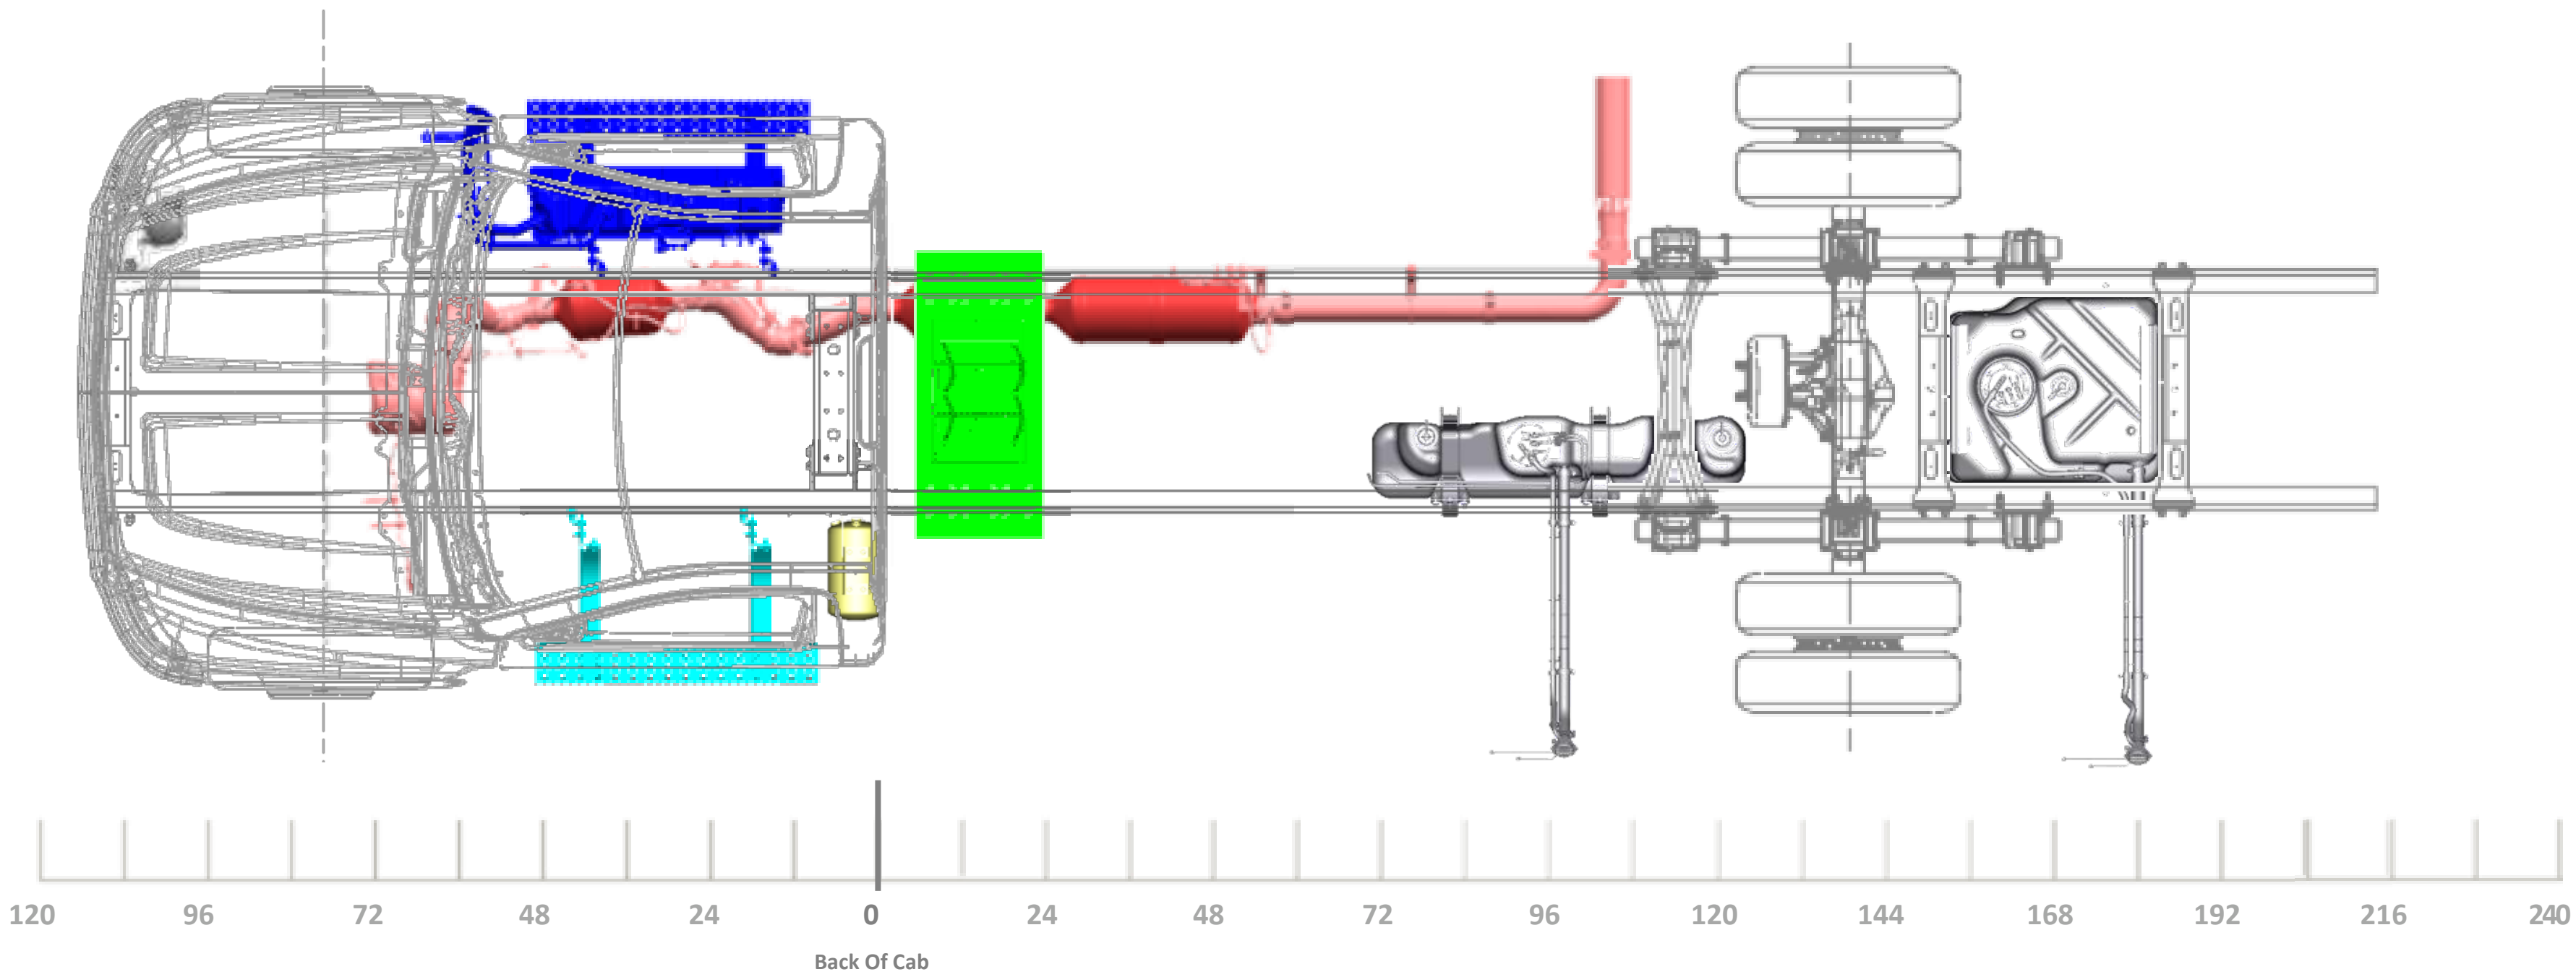
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

219” WB (138” CA)
75” AF

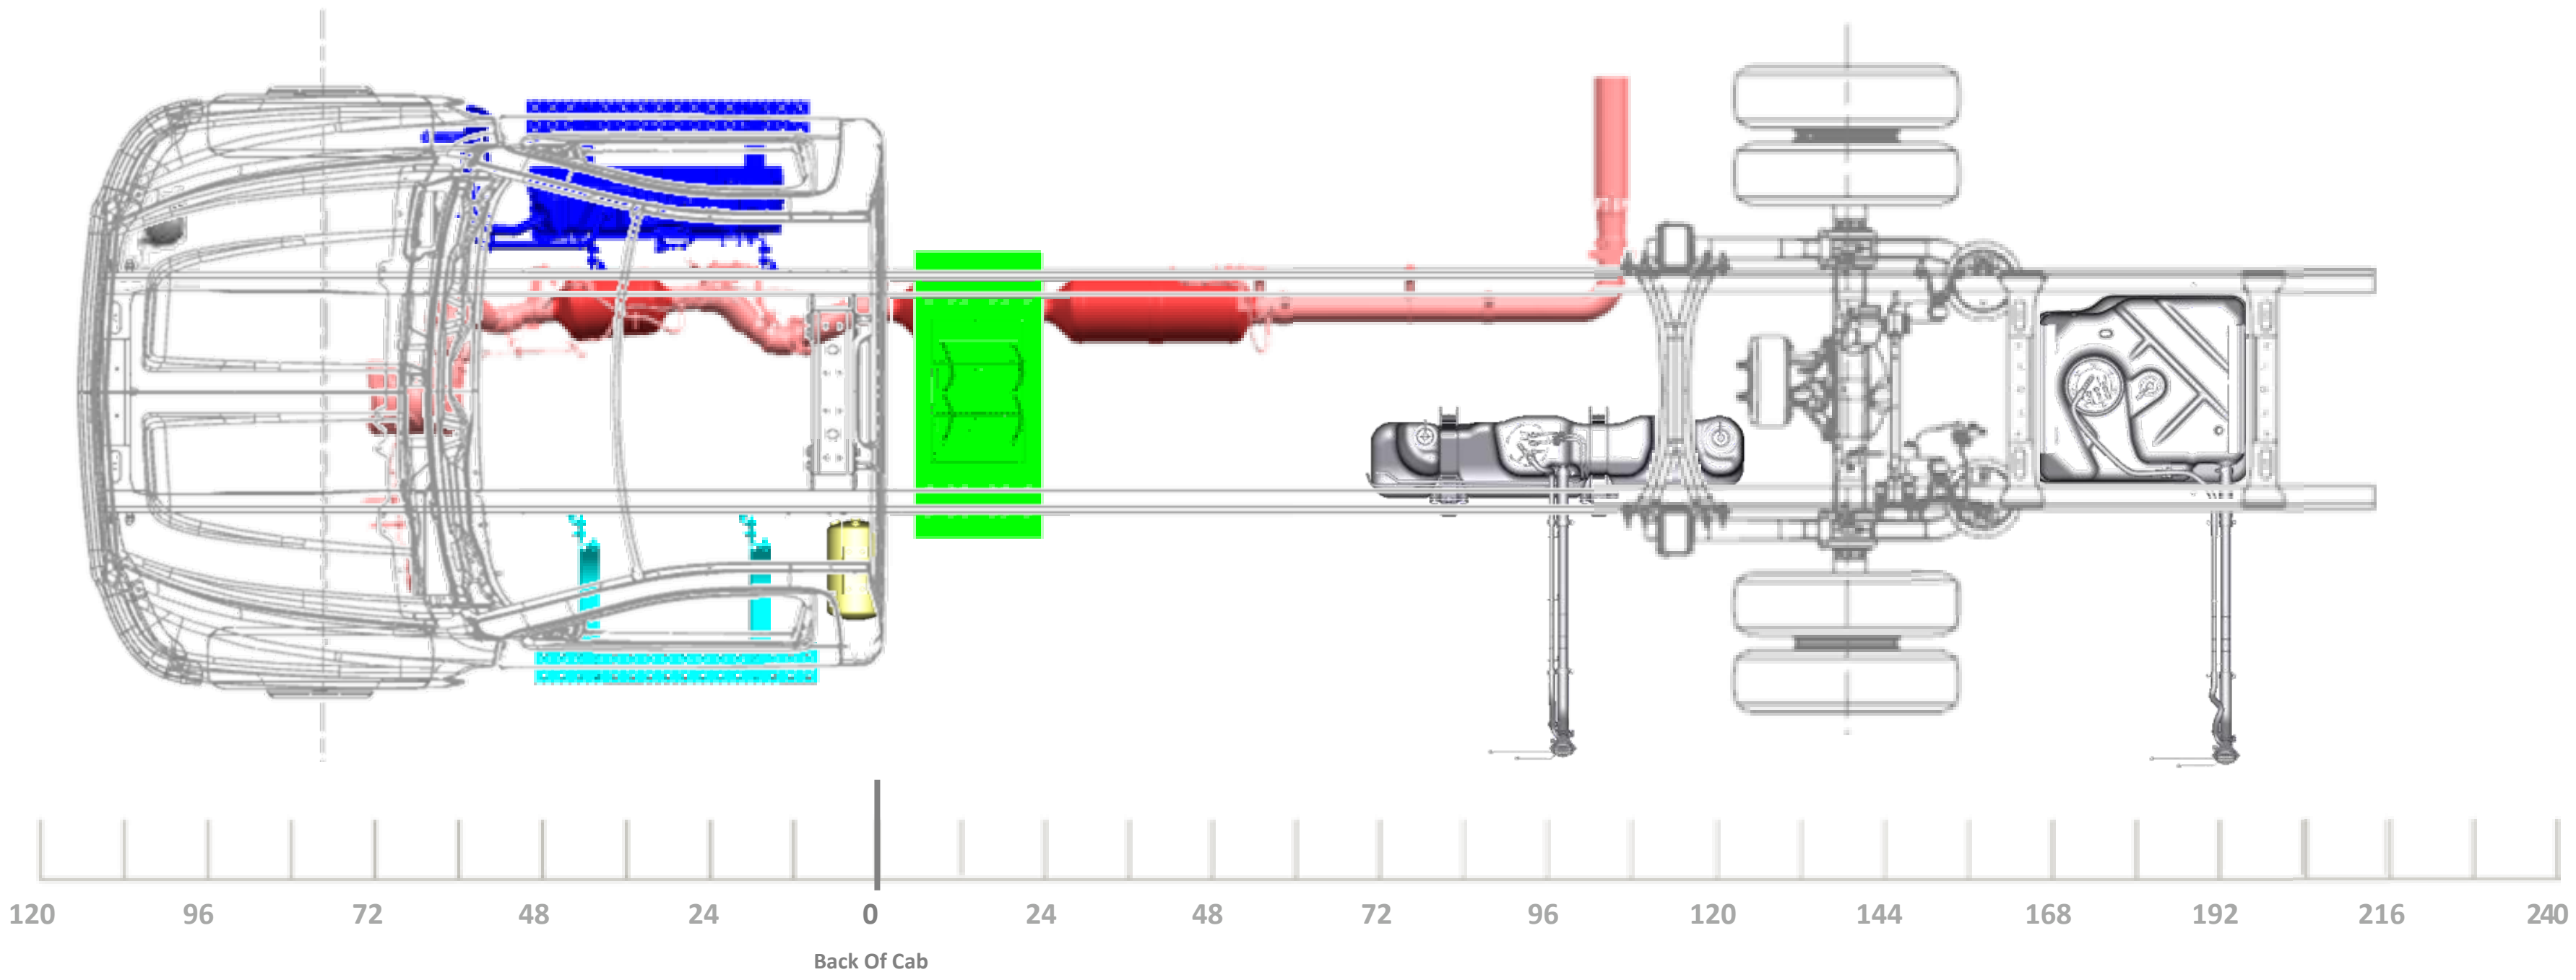
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

REGULAR
CAB 231”
WB

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

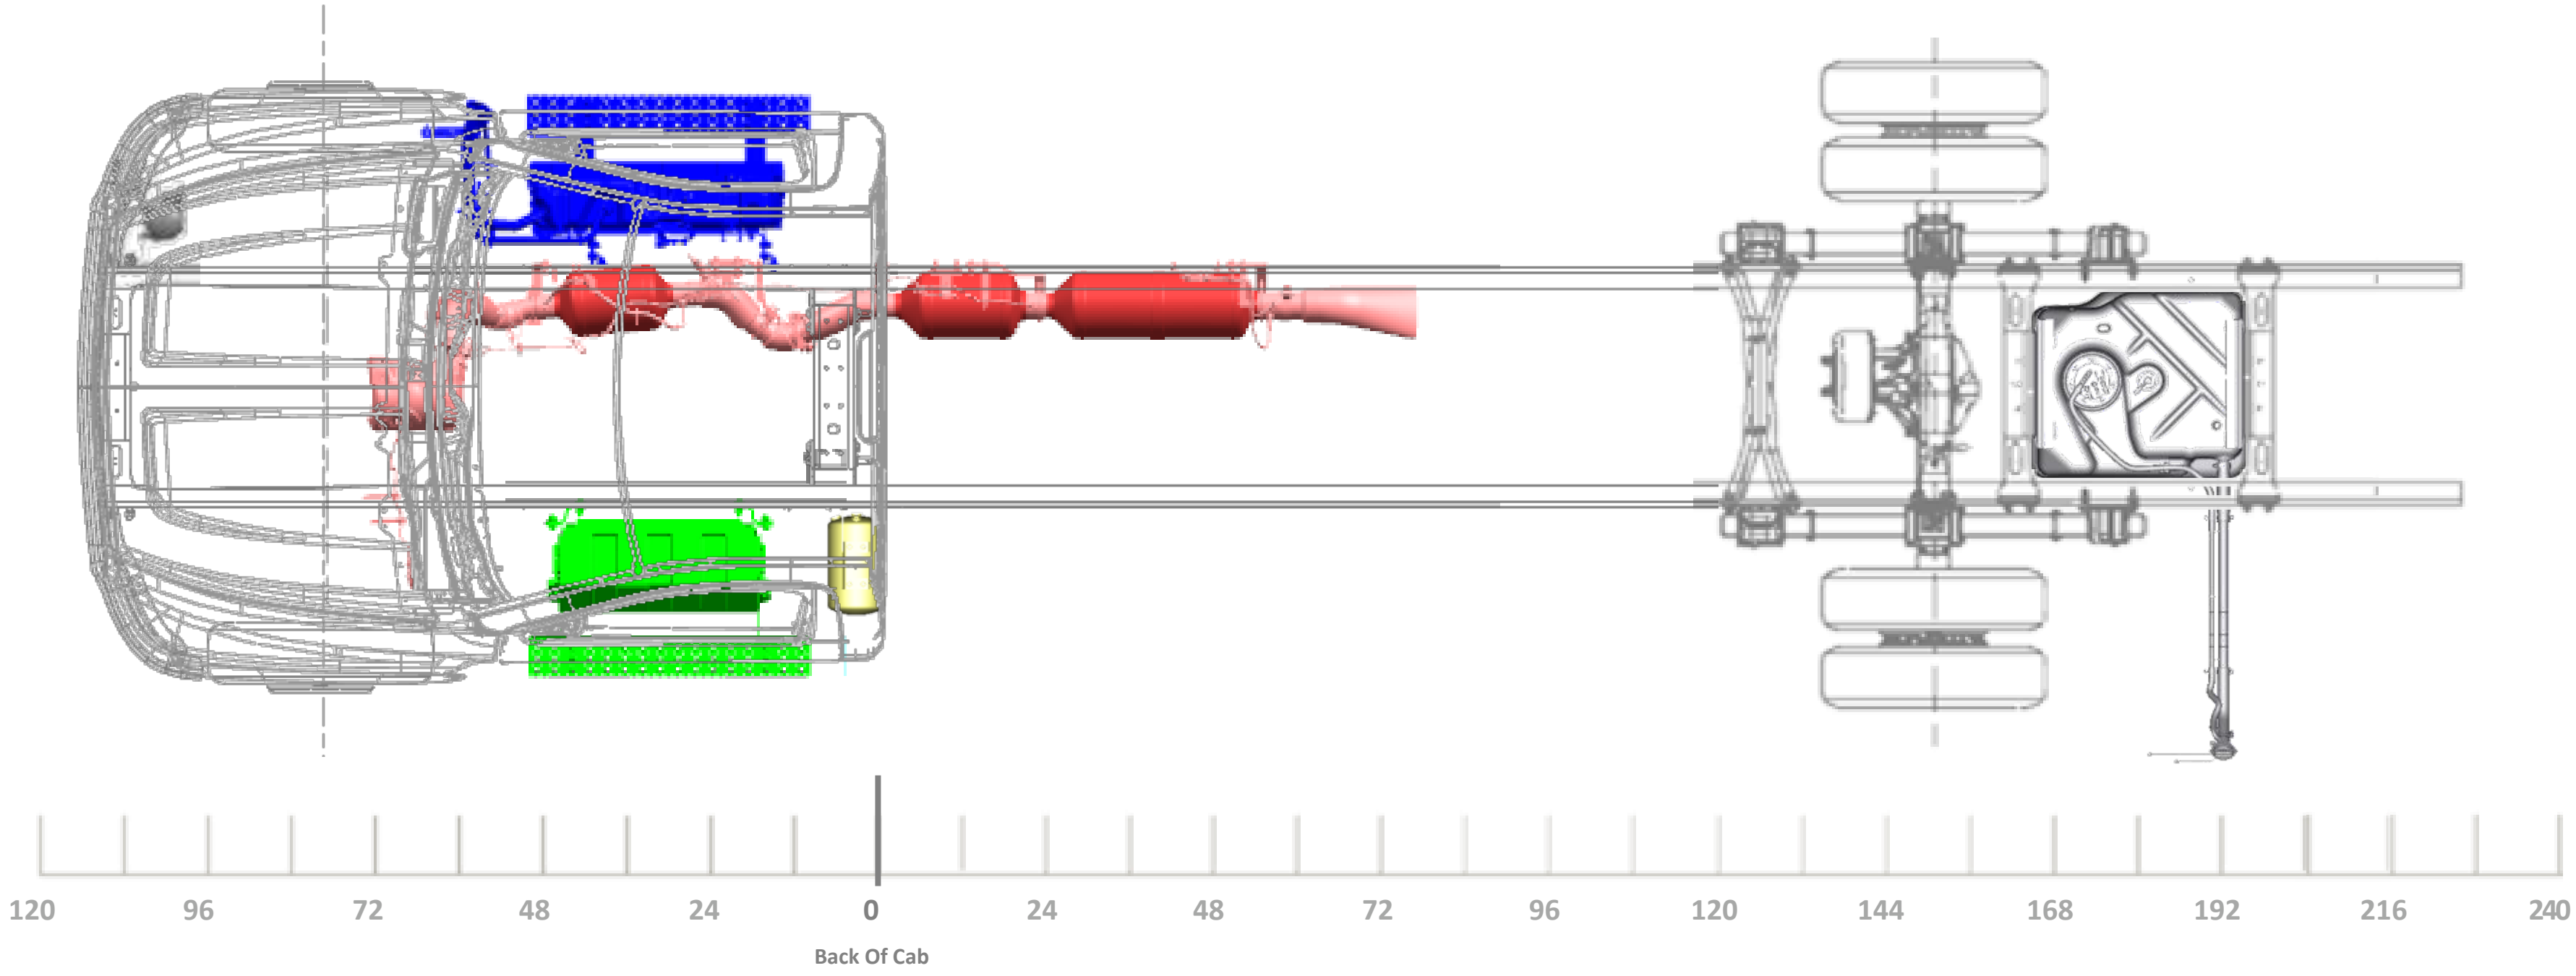
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

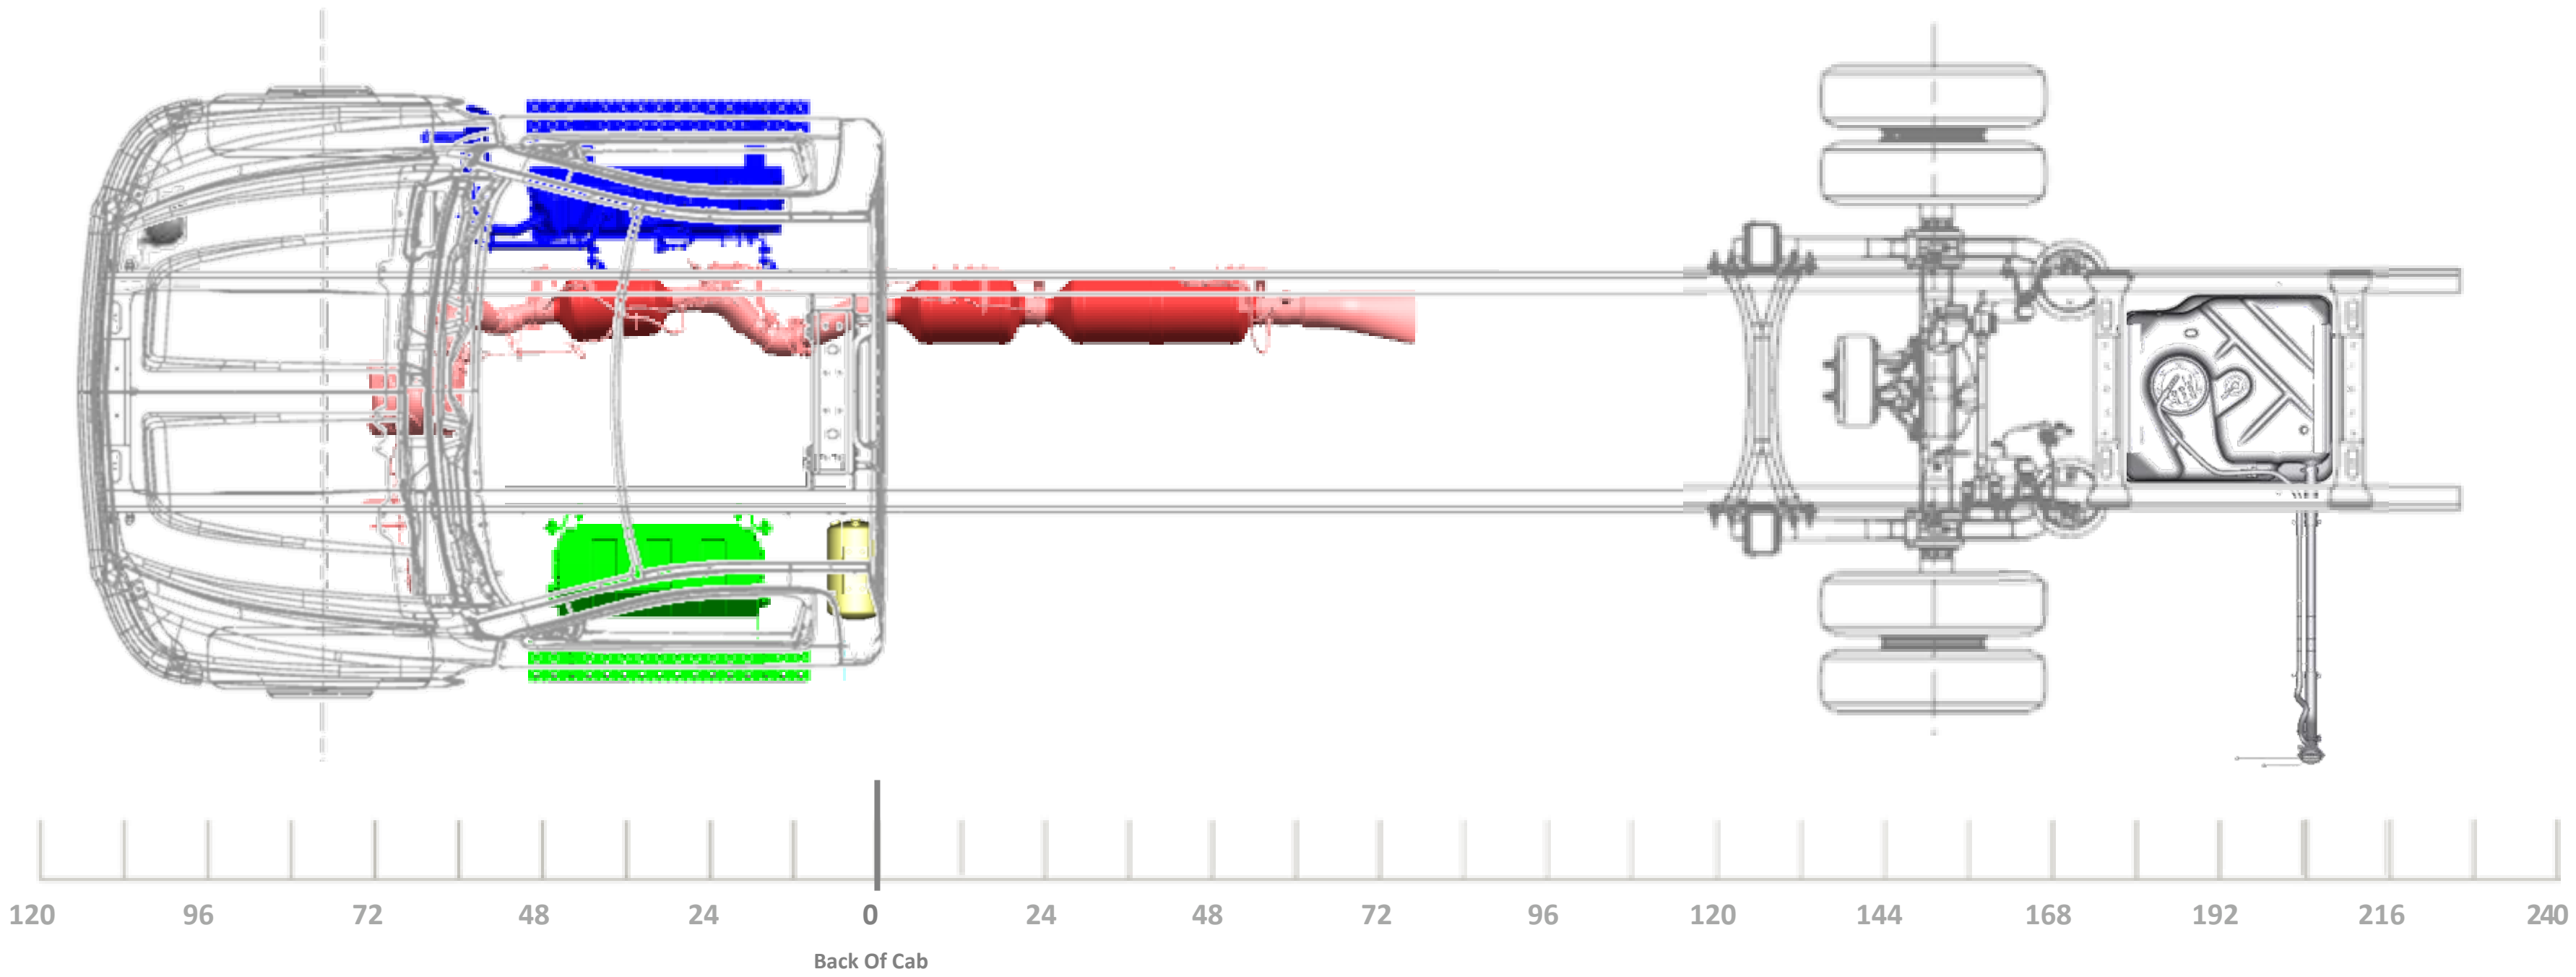
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

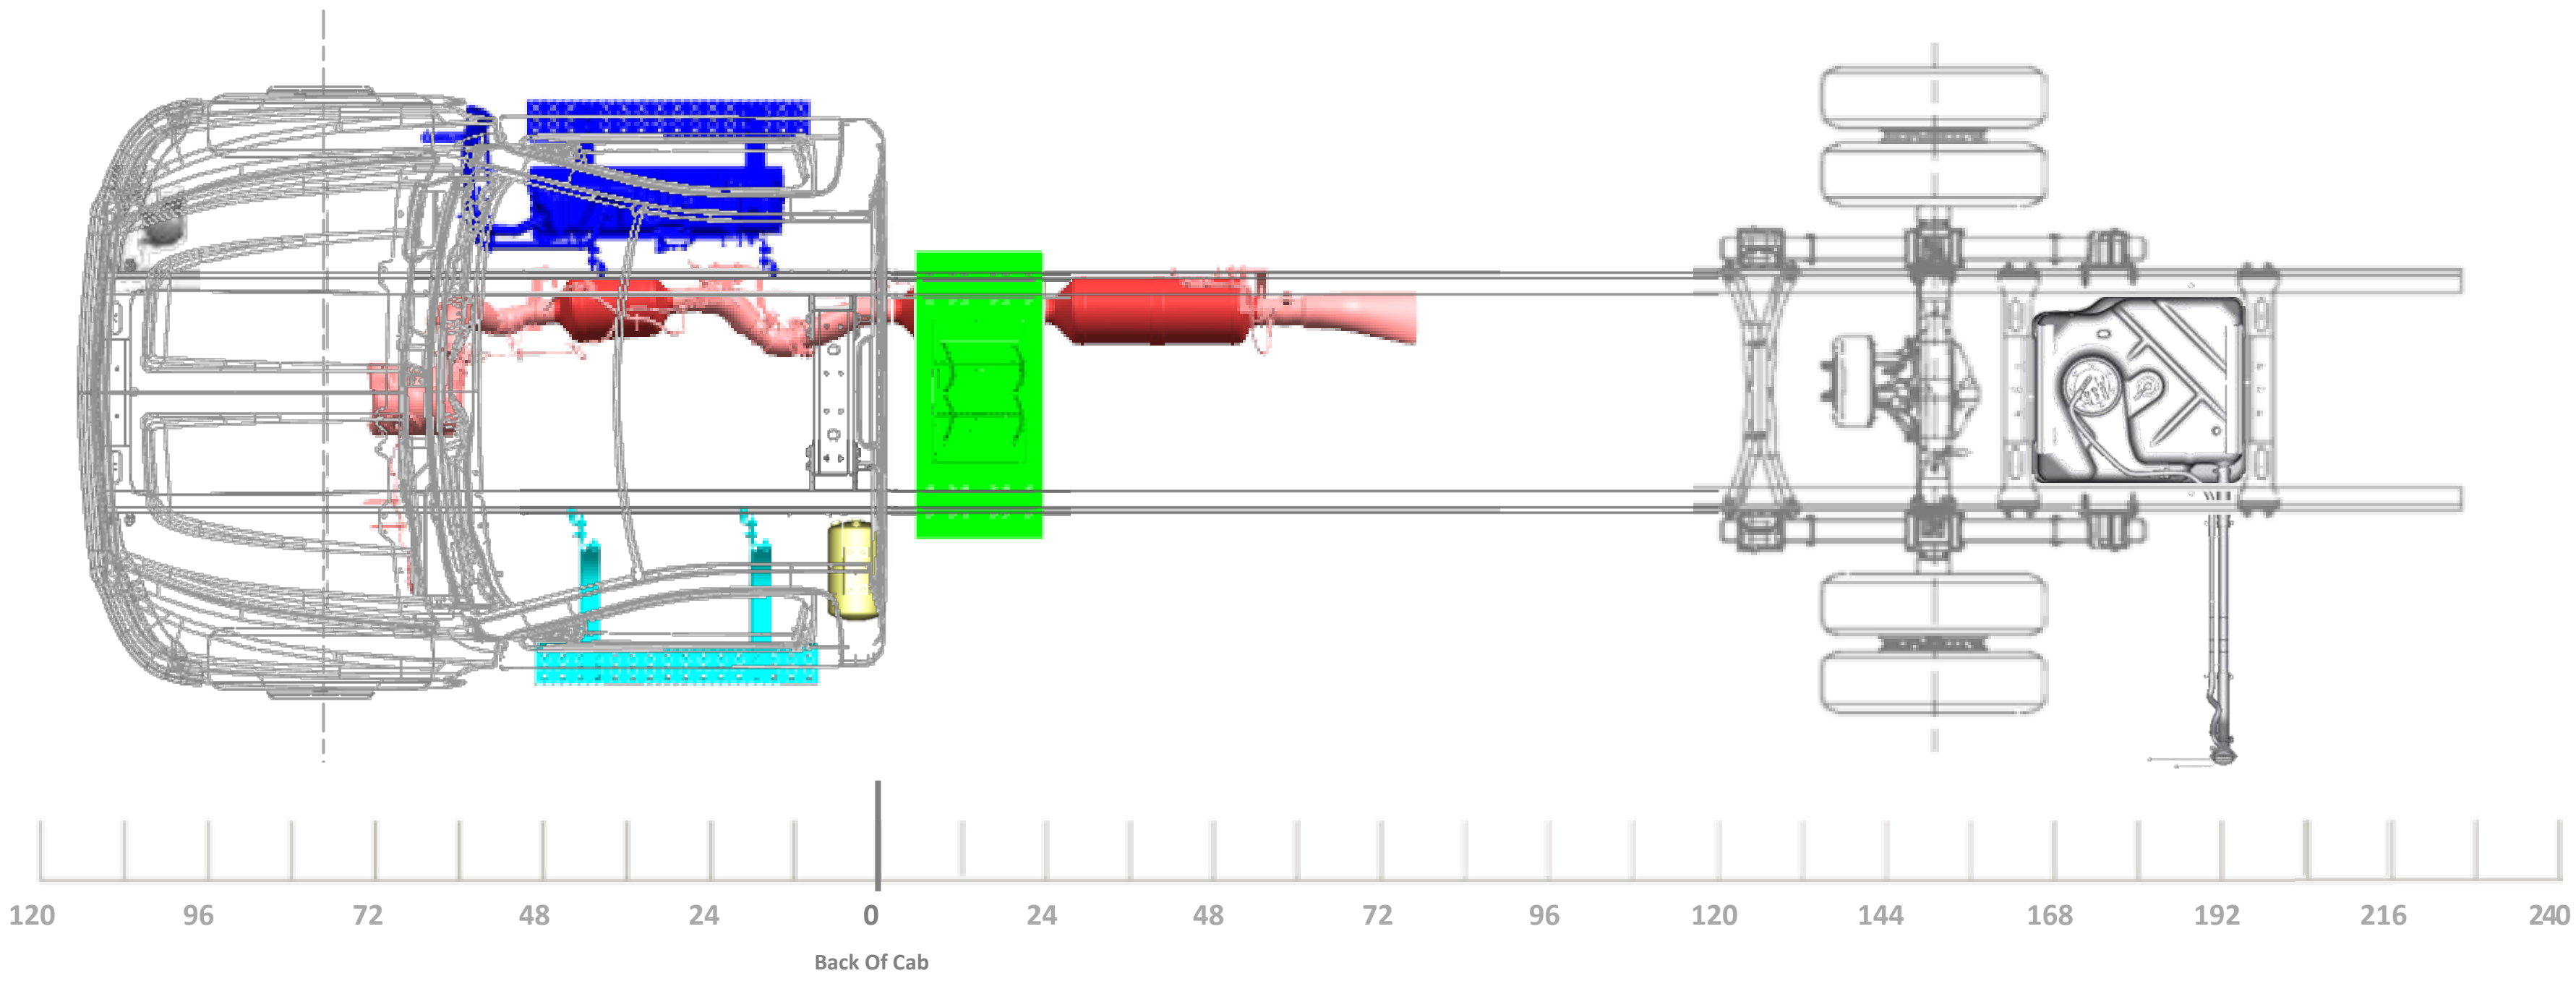
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

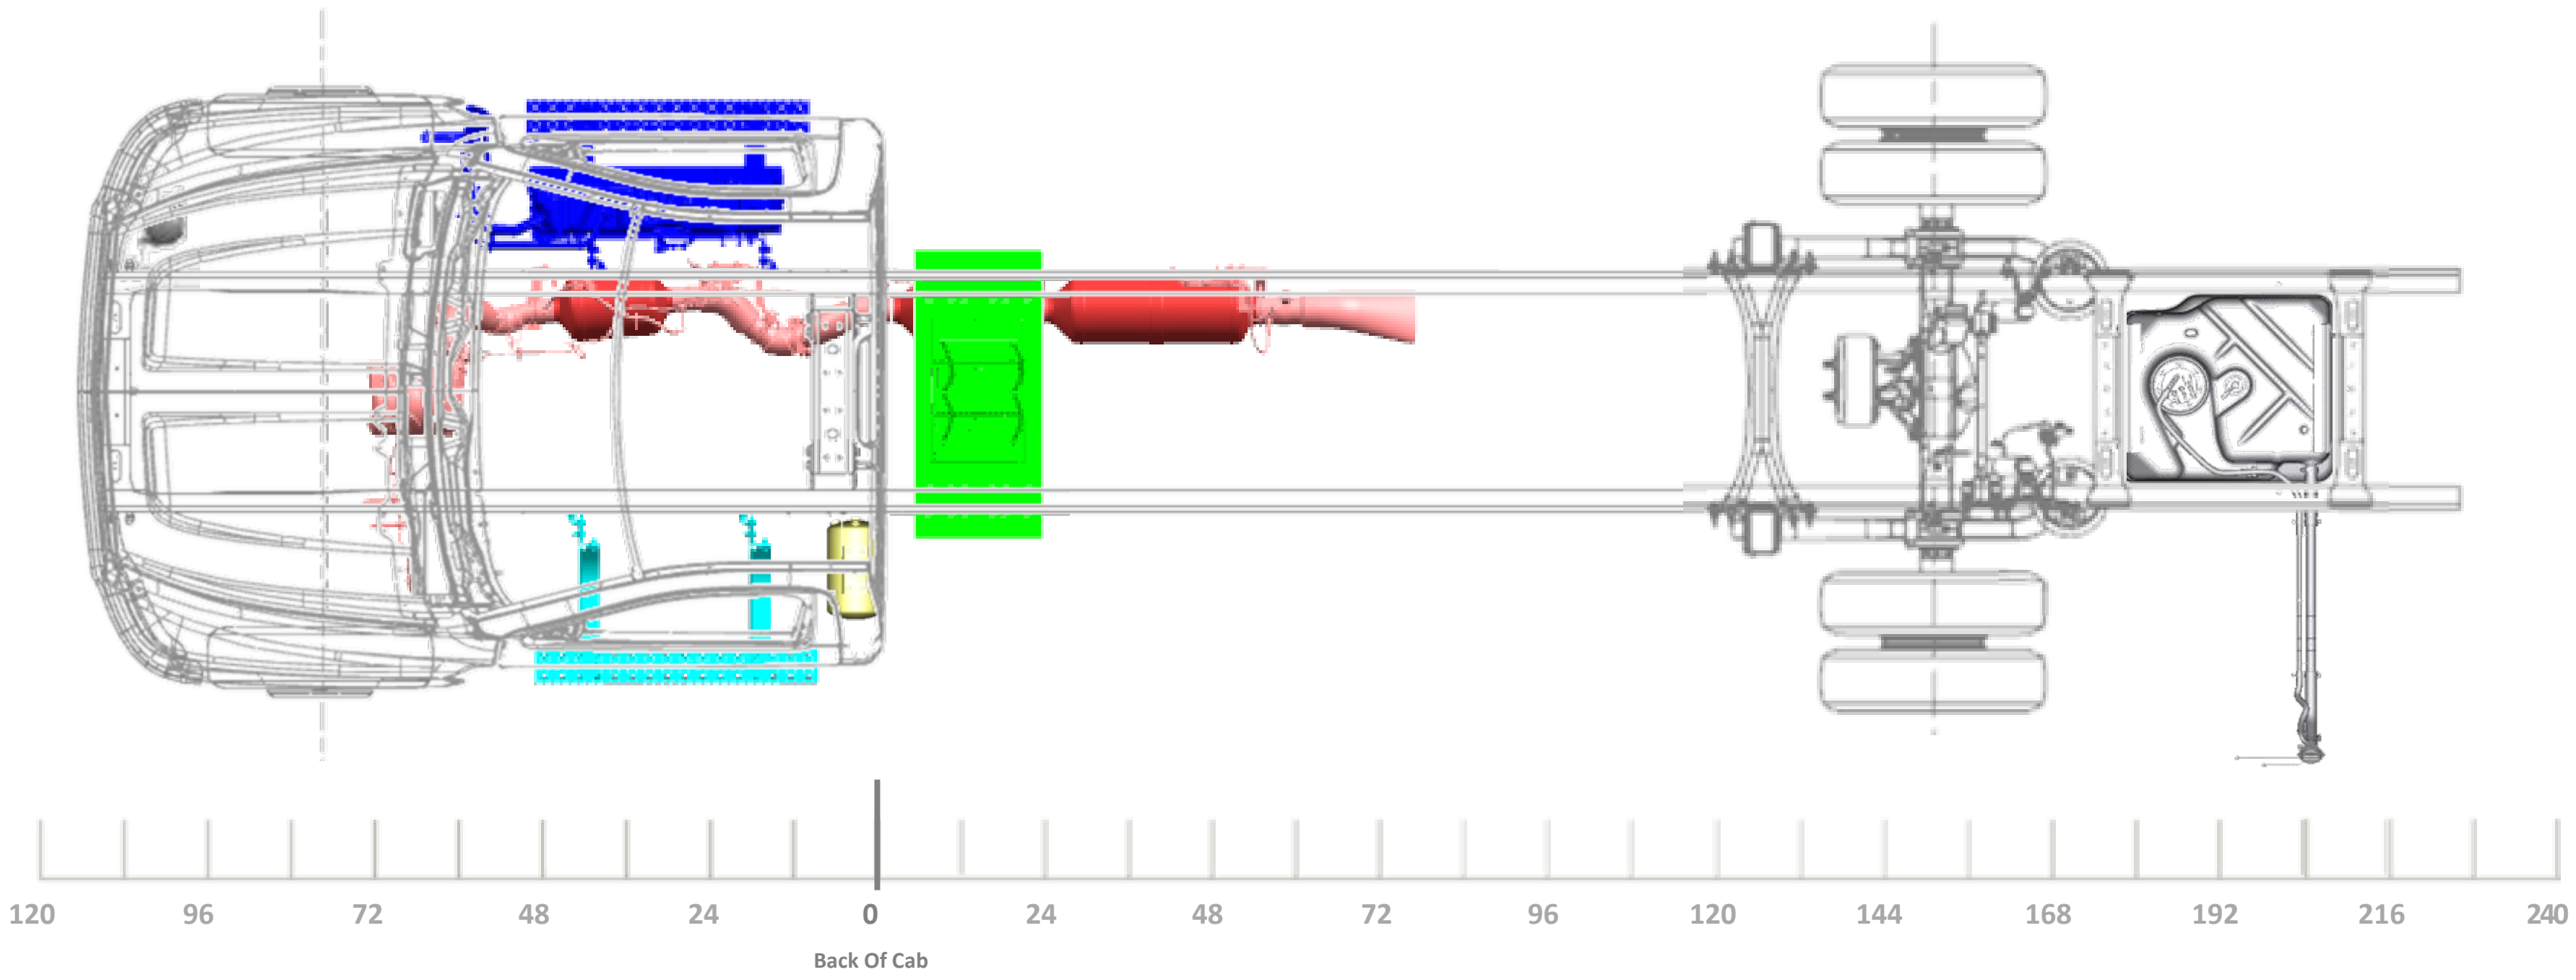

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

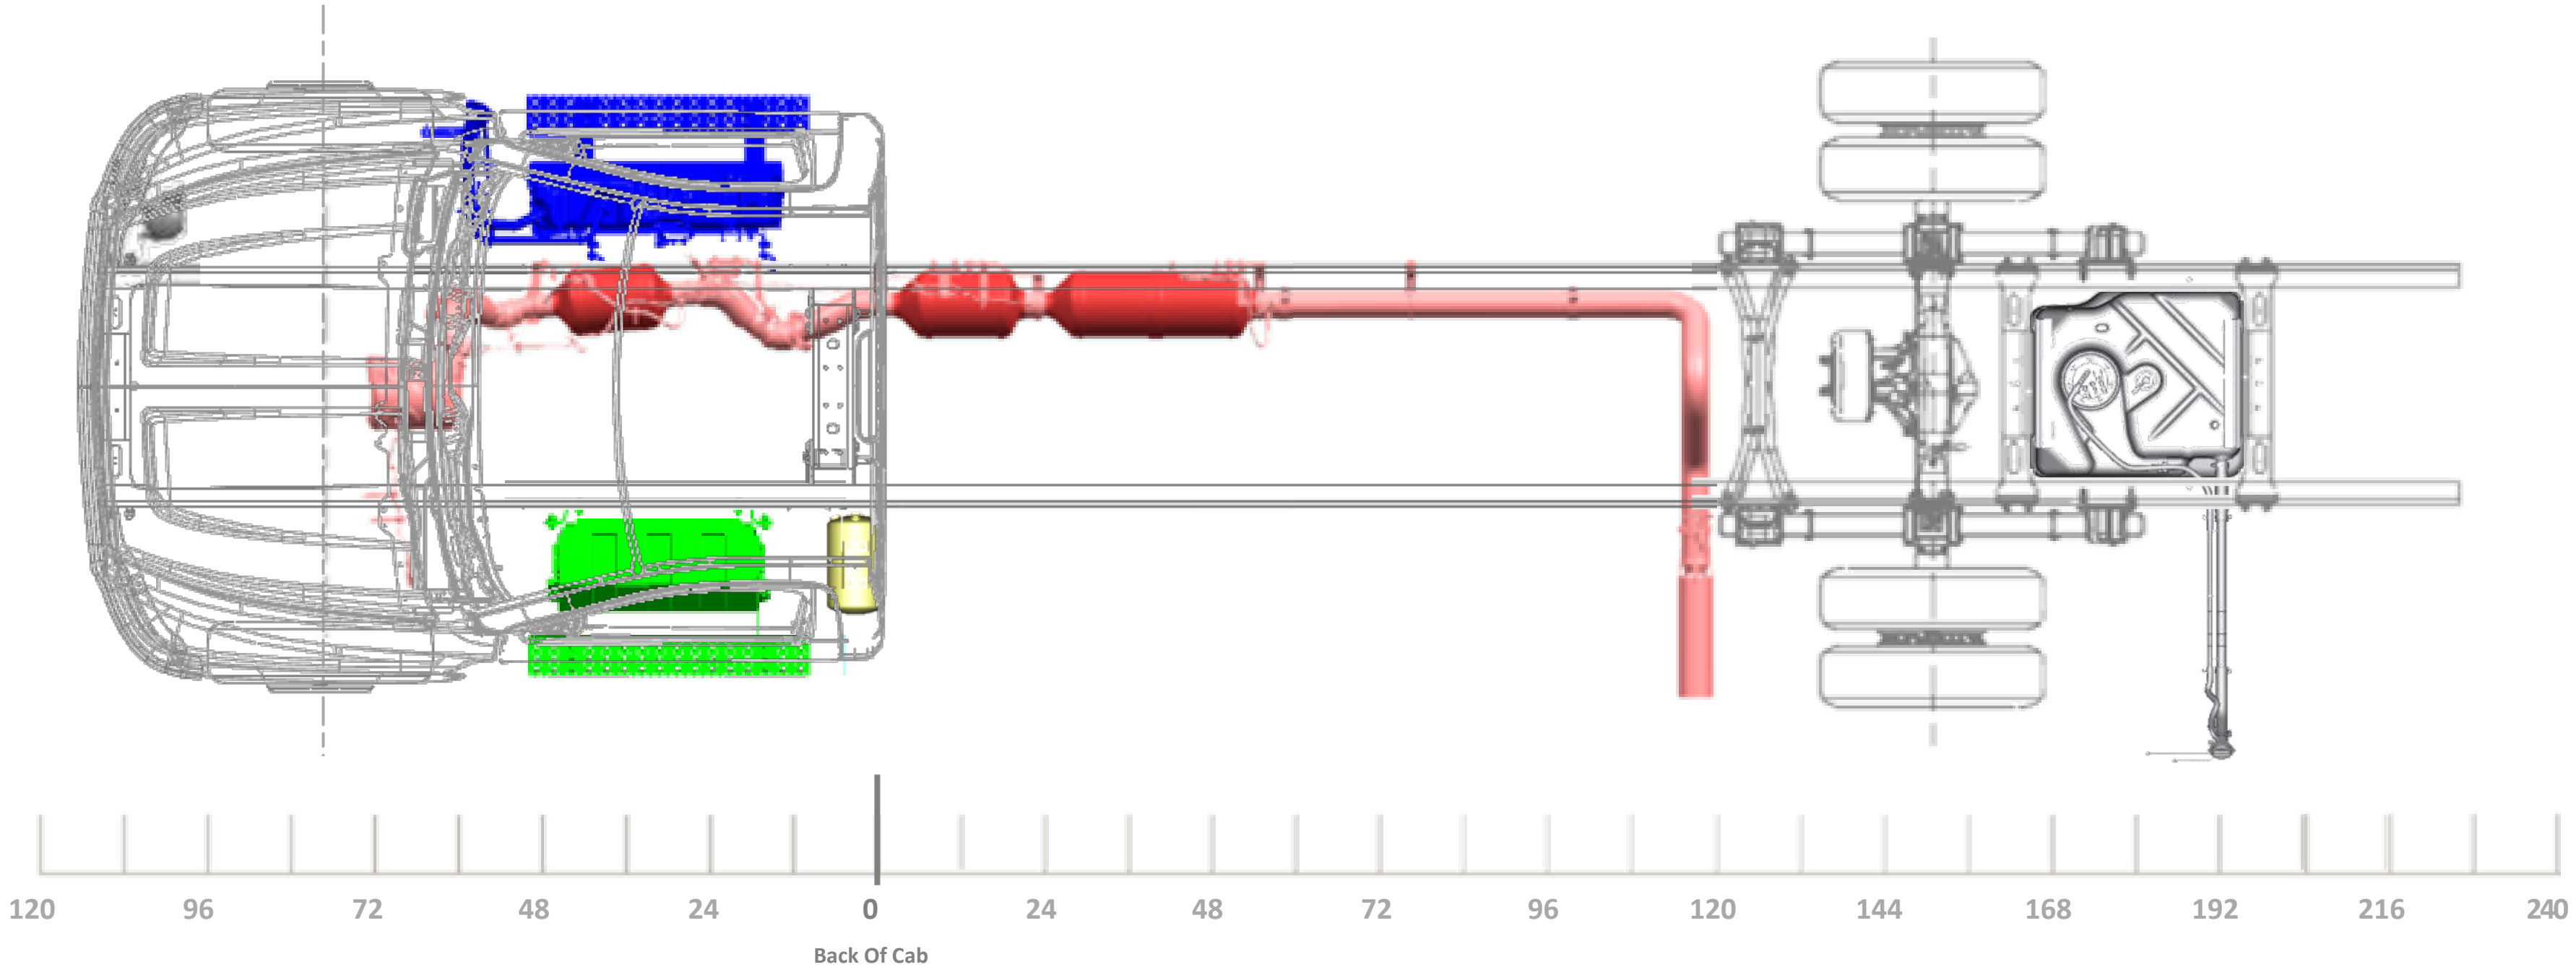
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

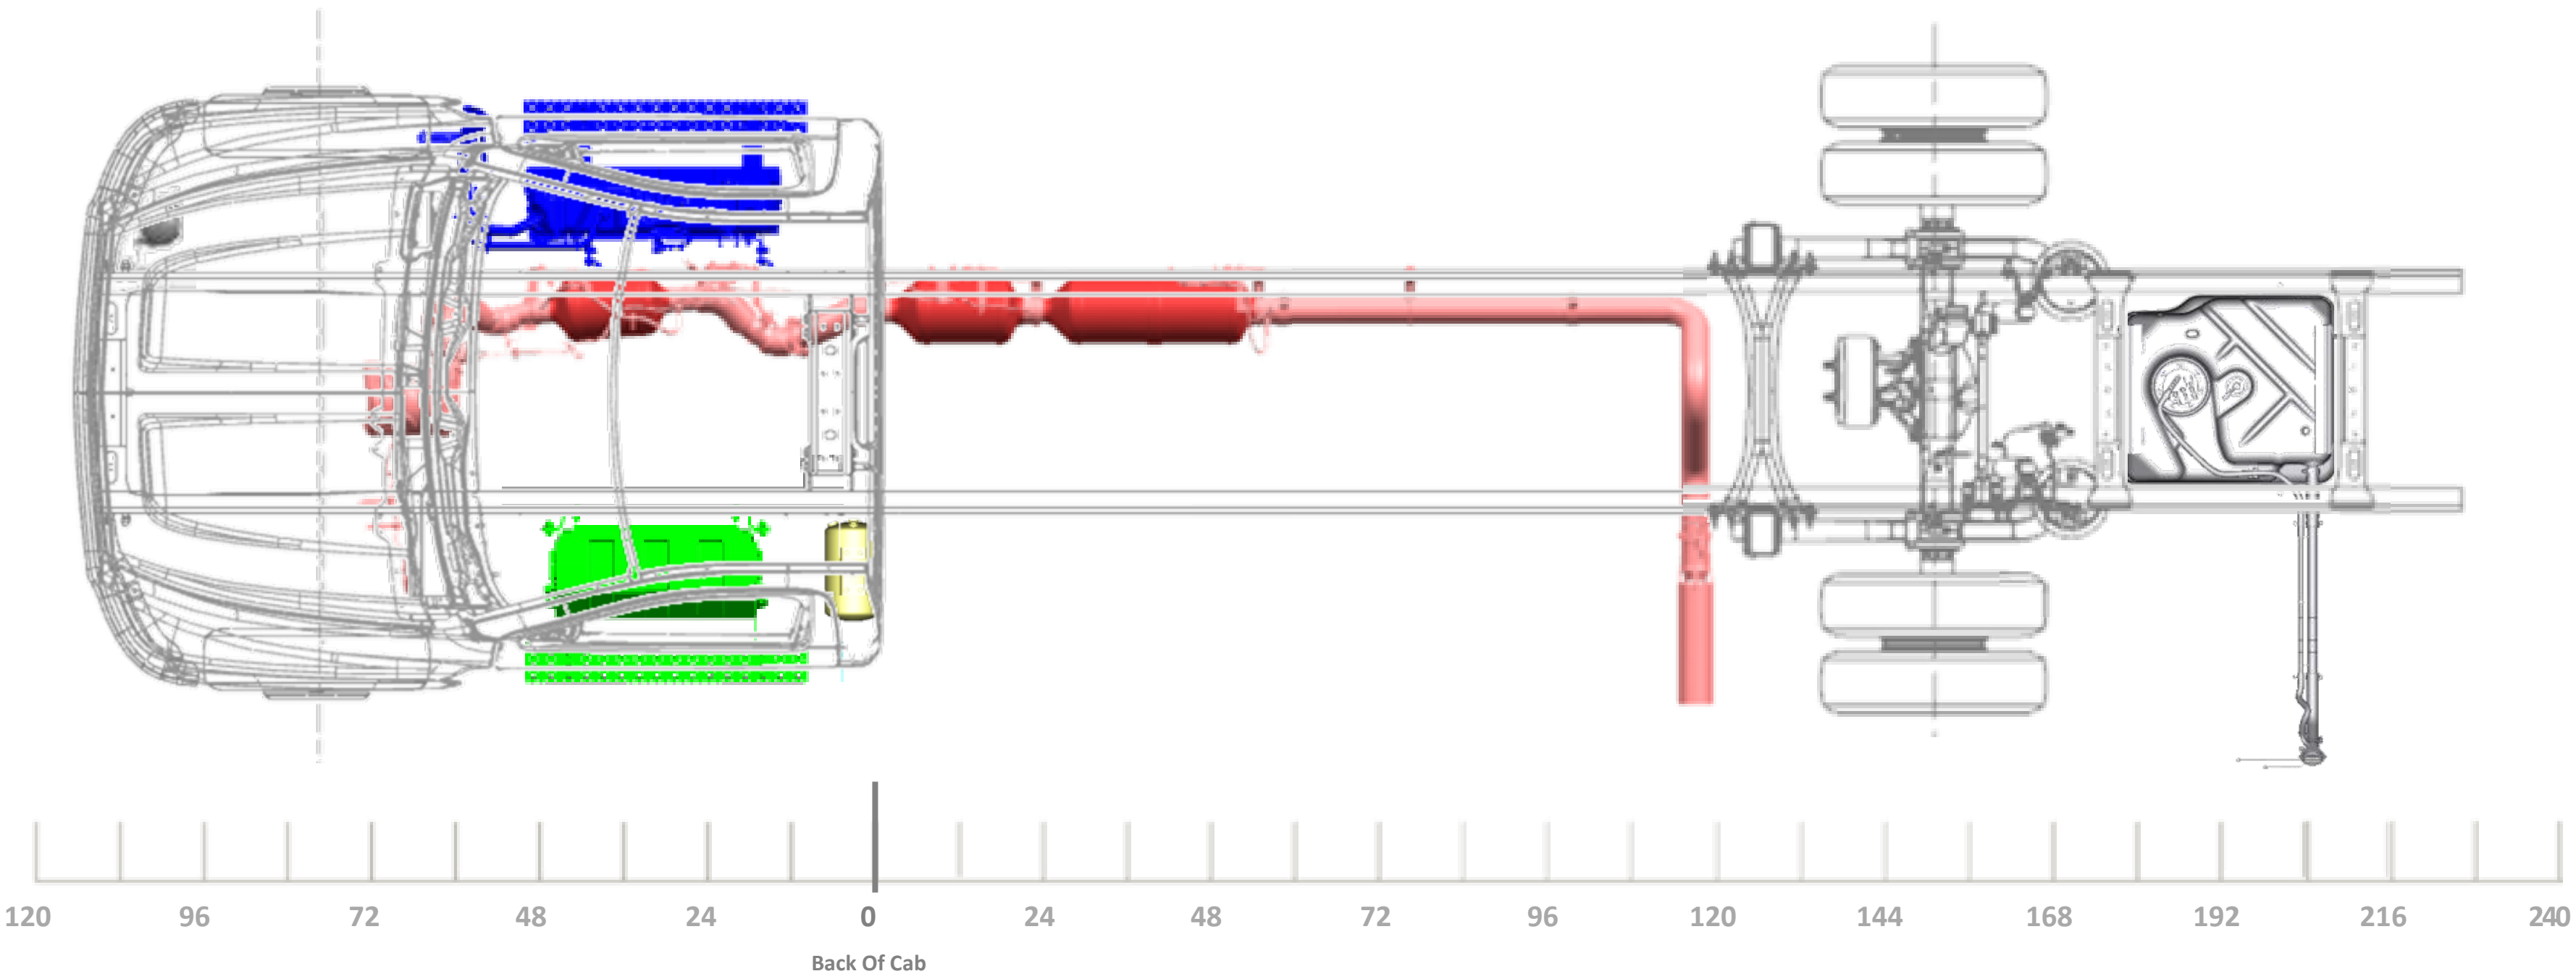
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

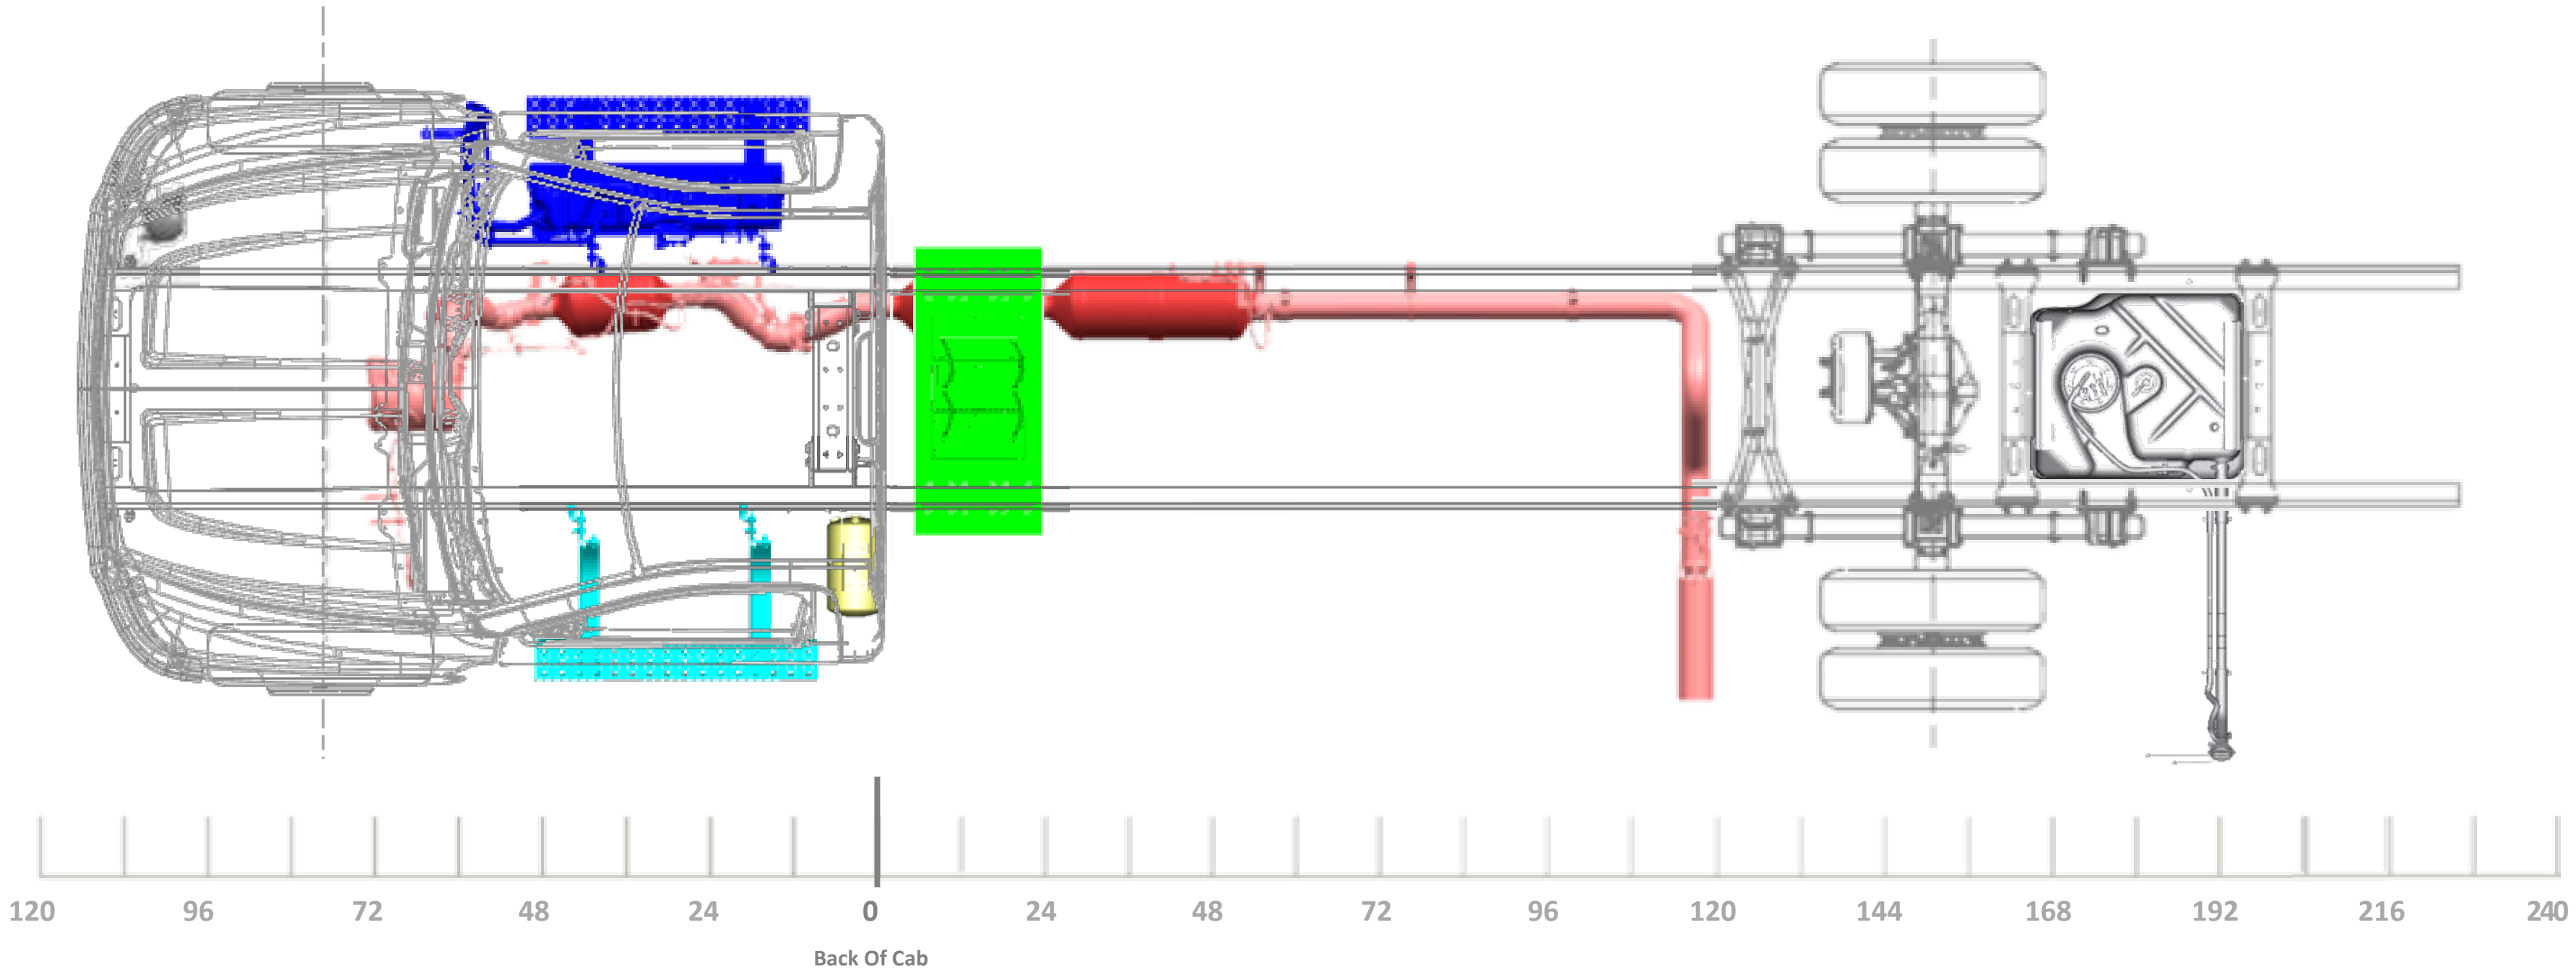
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

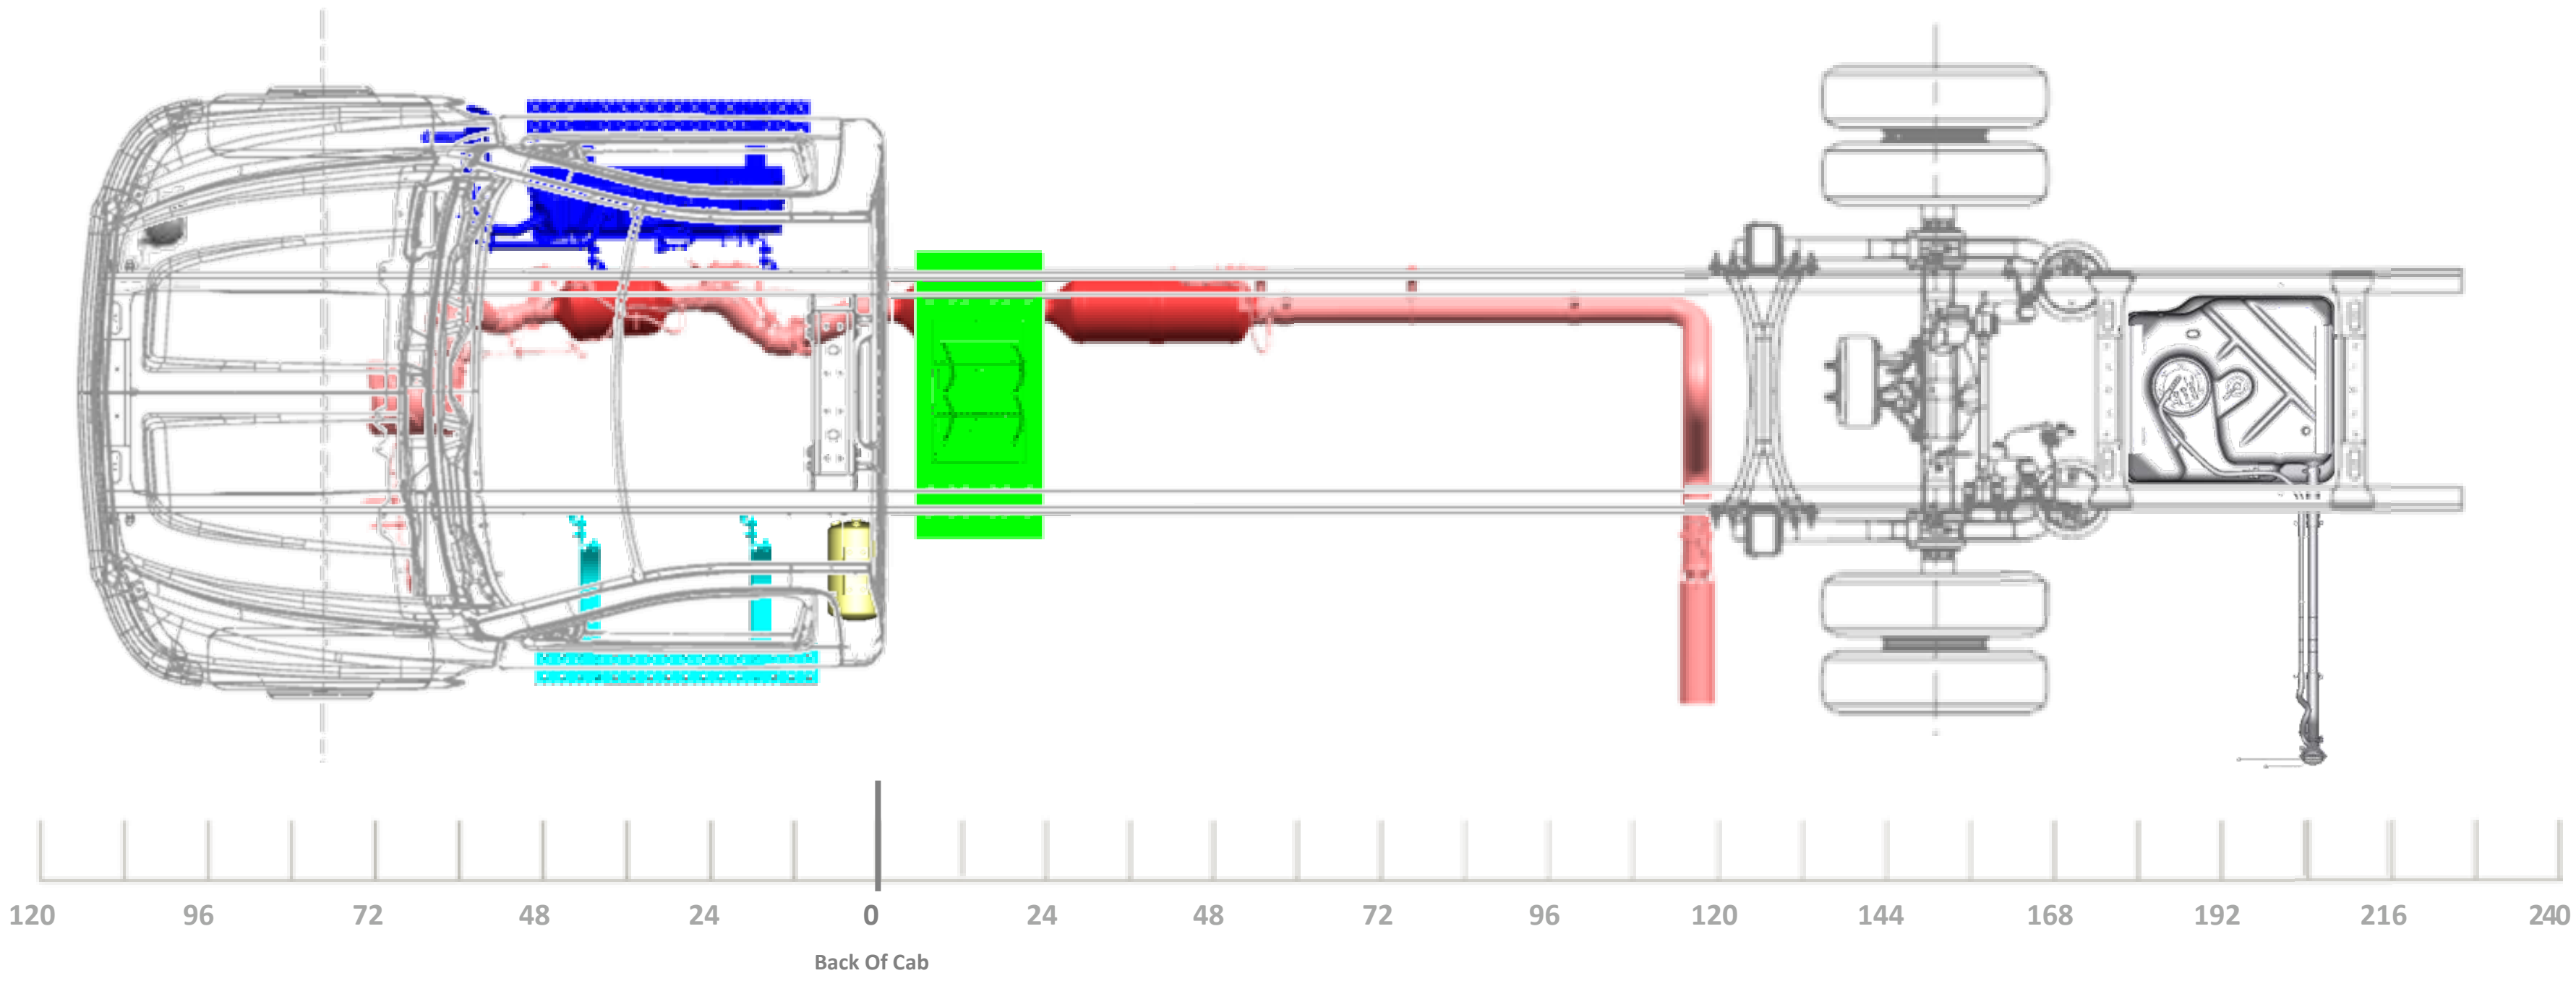
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

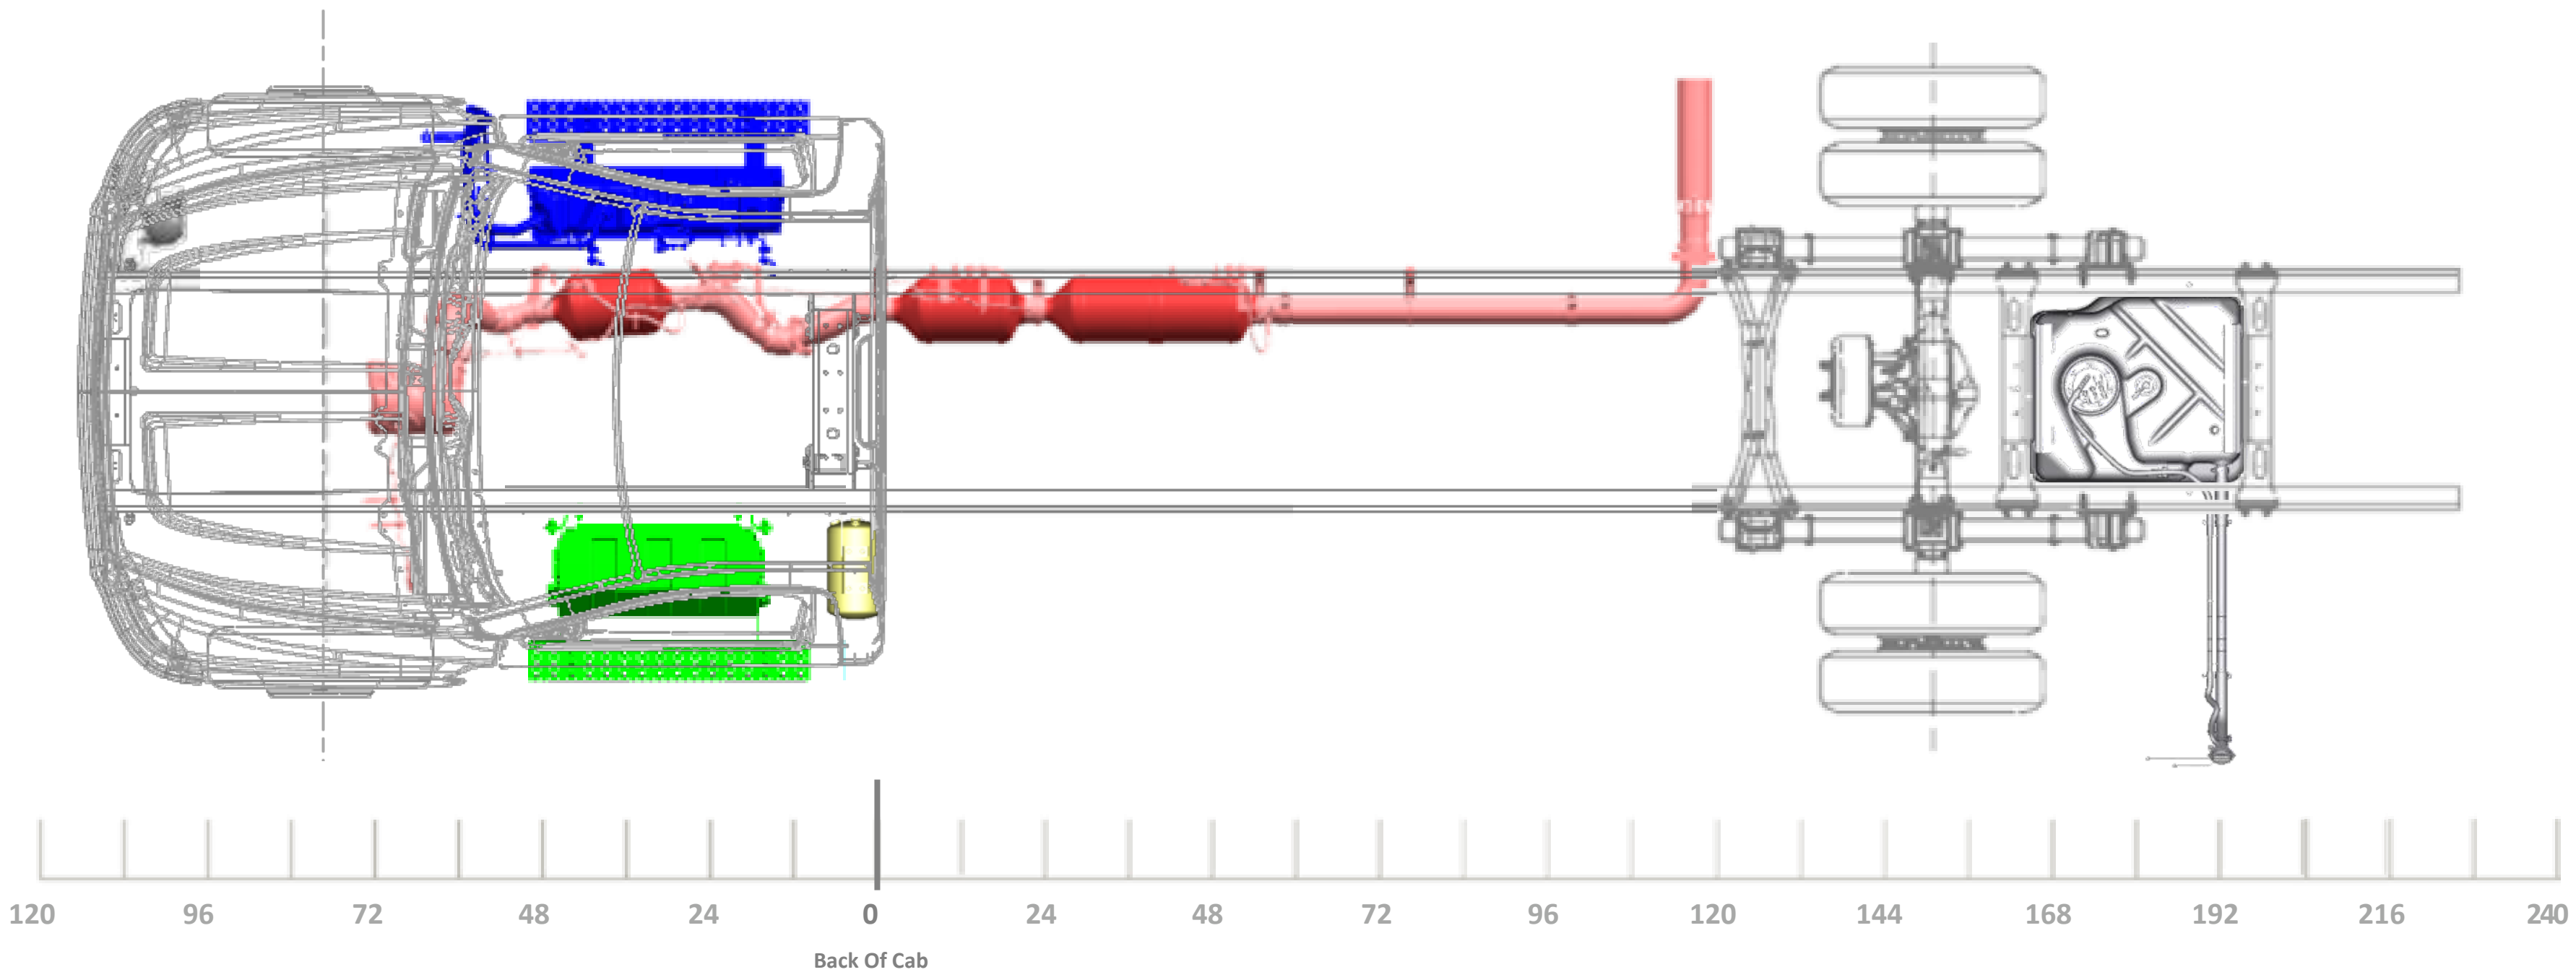
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

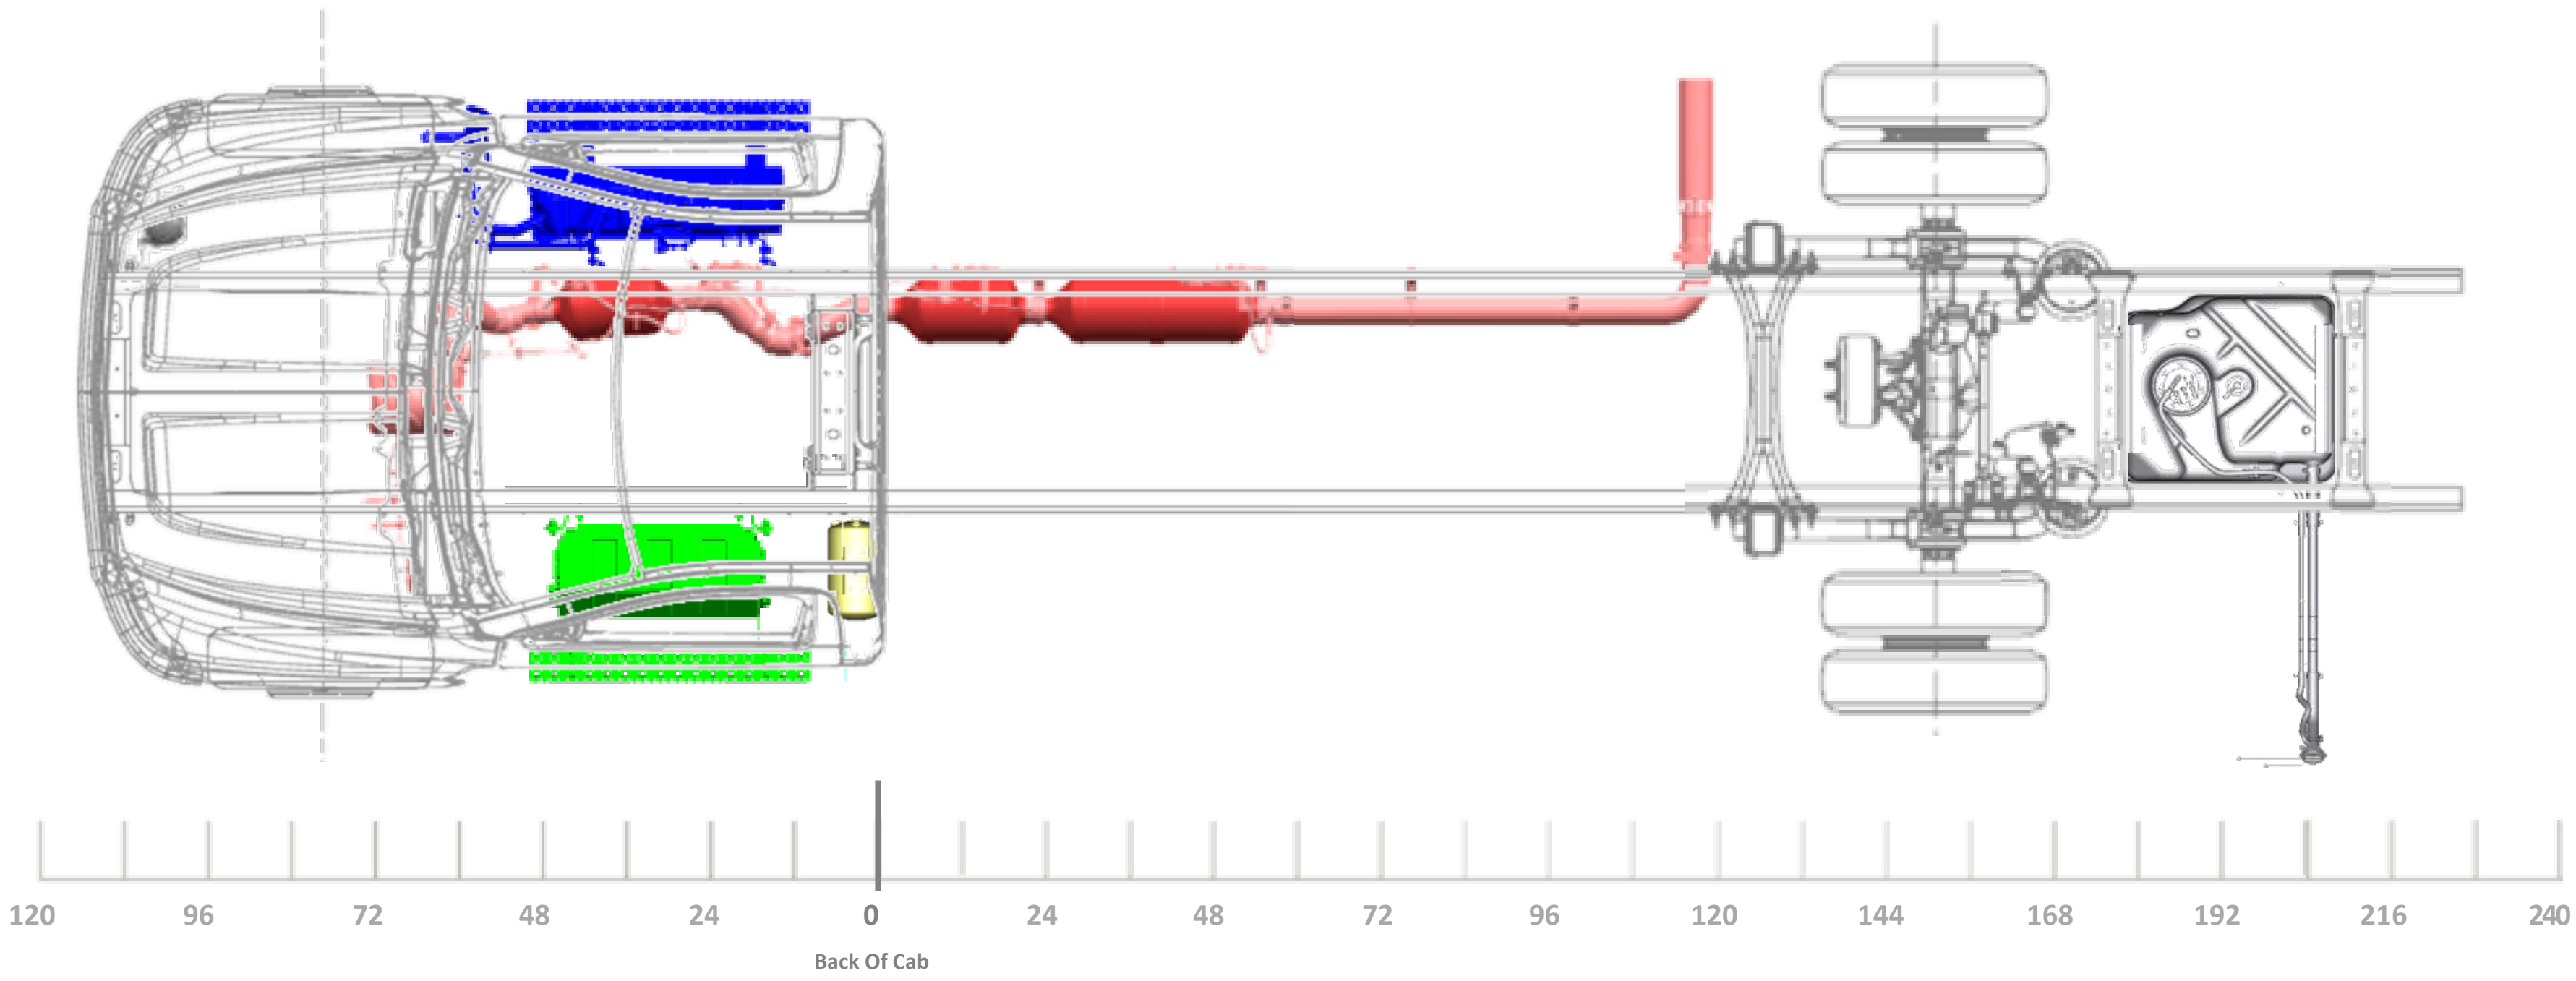
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

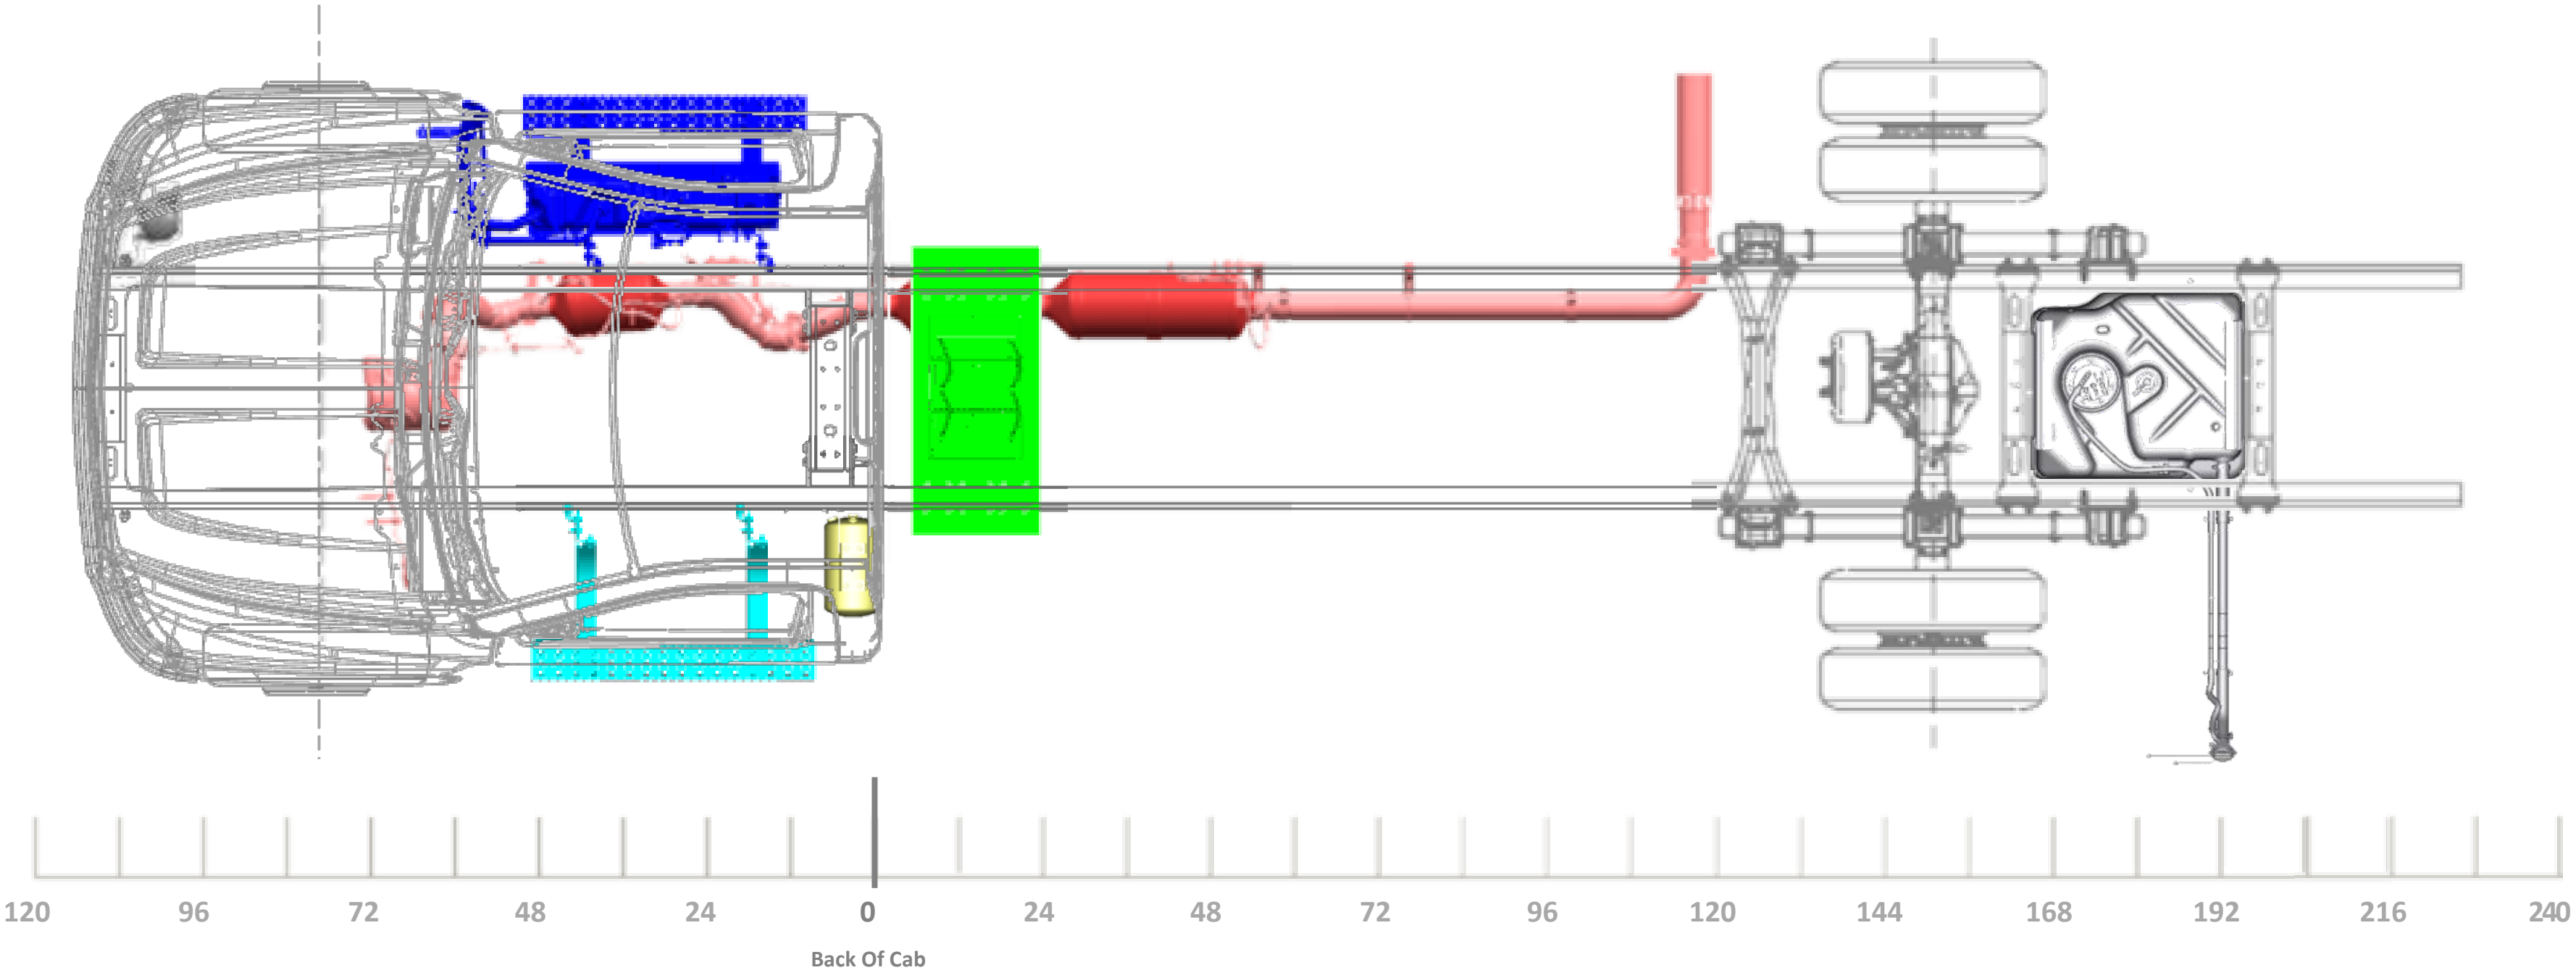
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

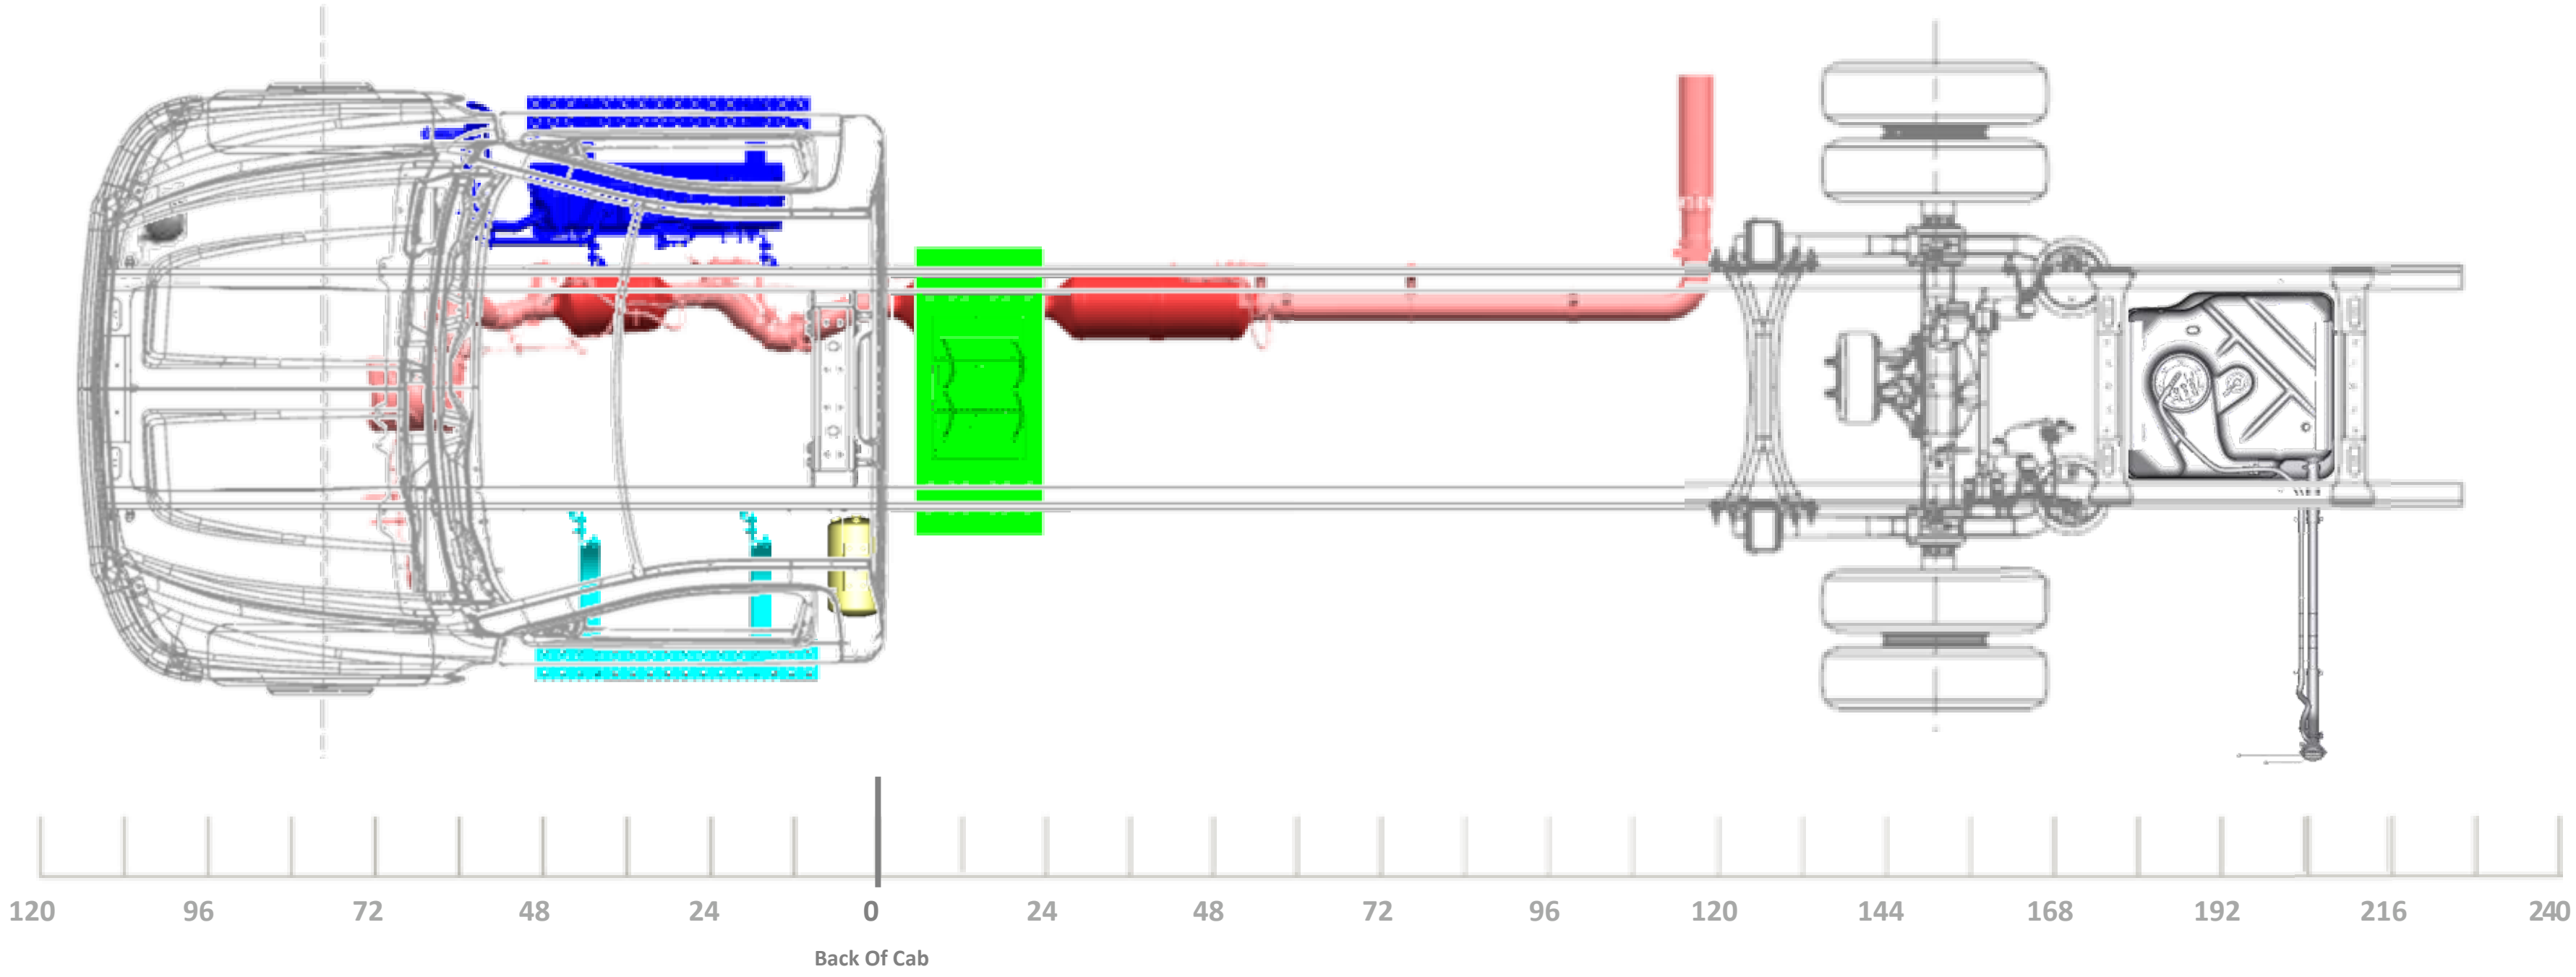
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

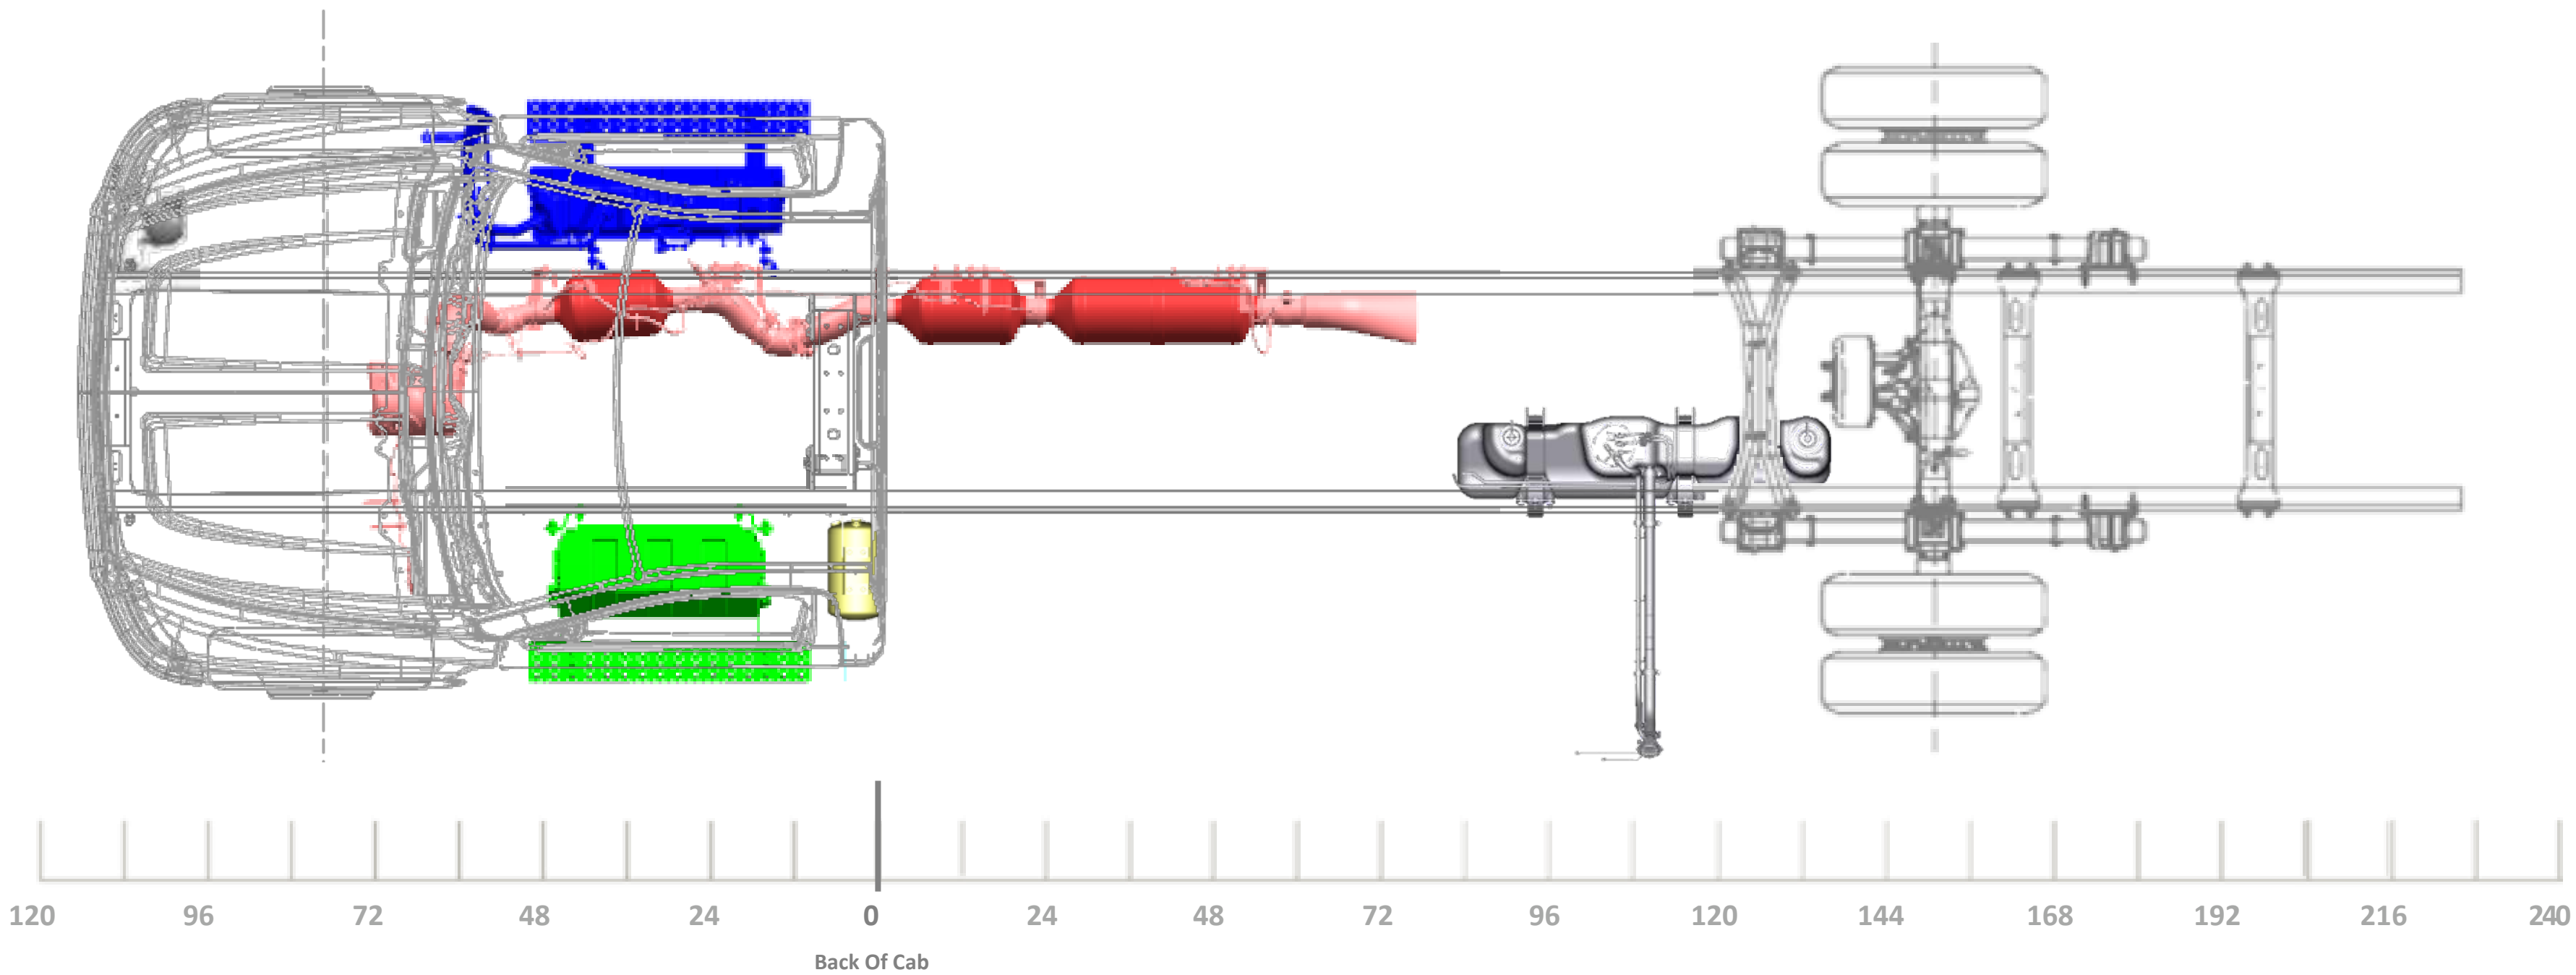
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

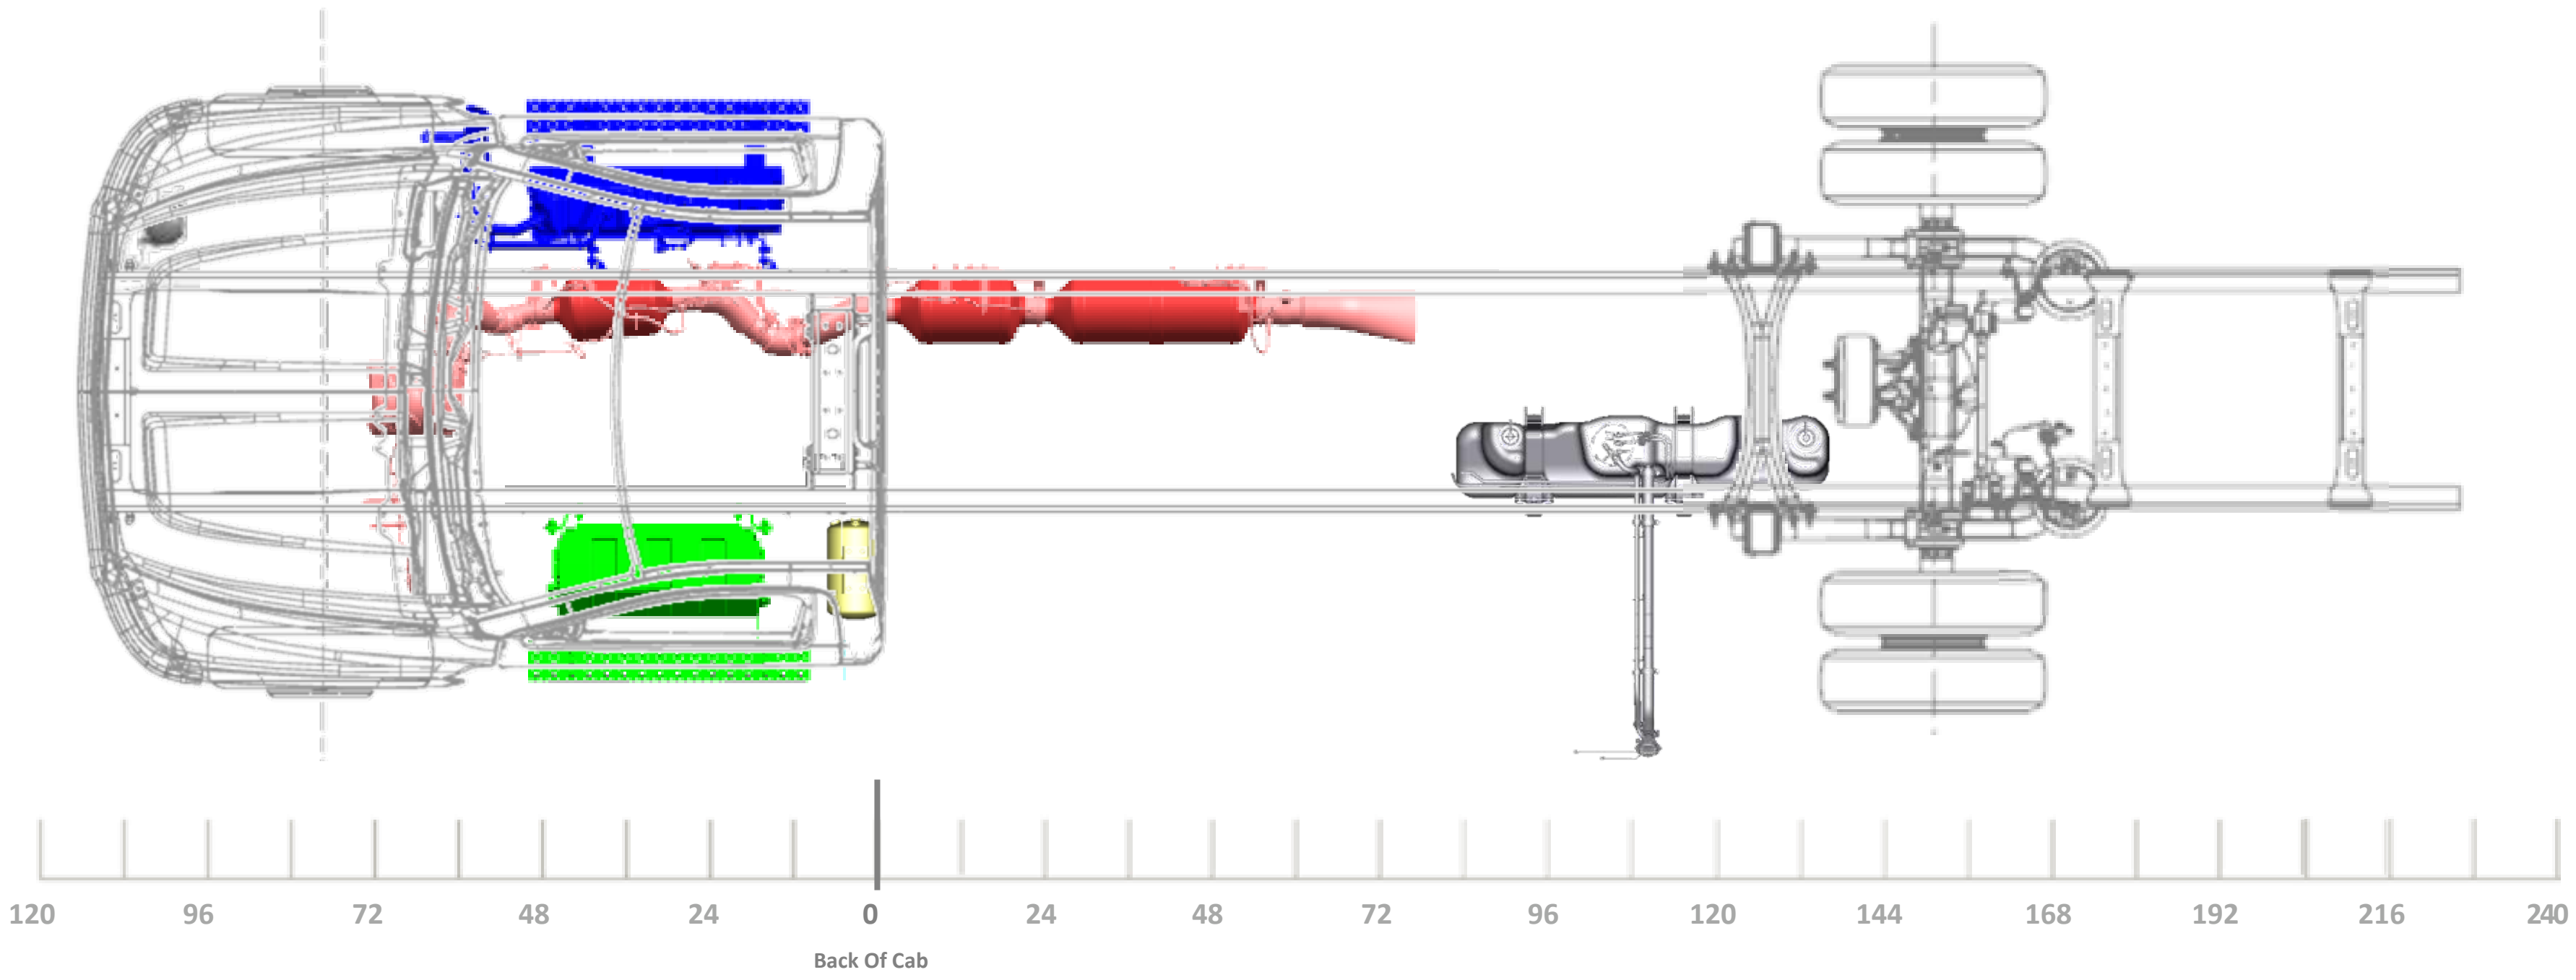
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

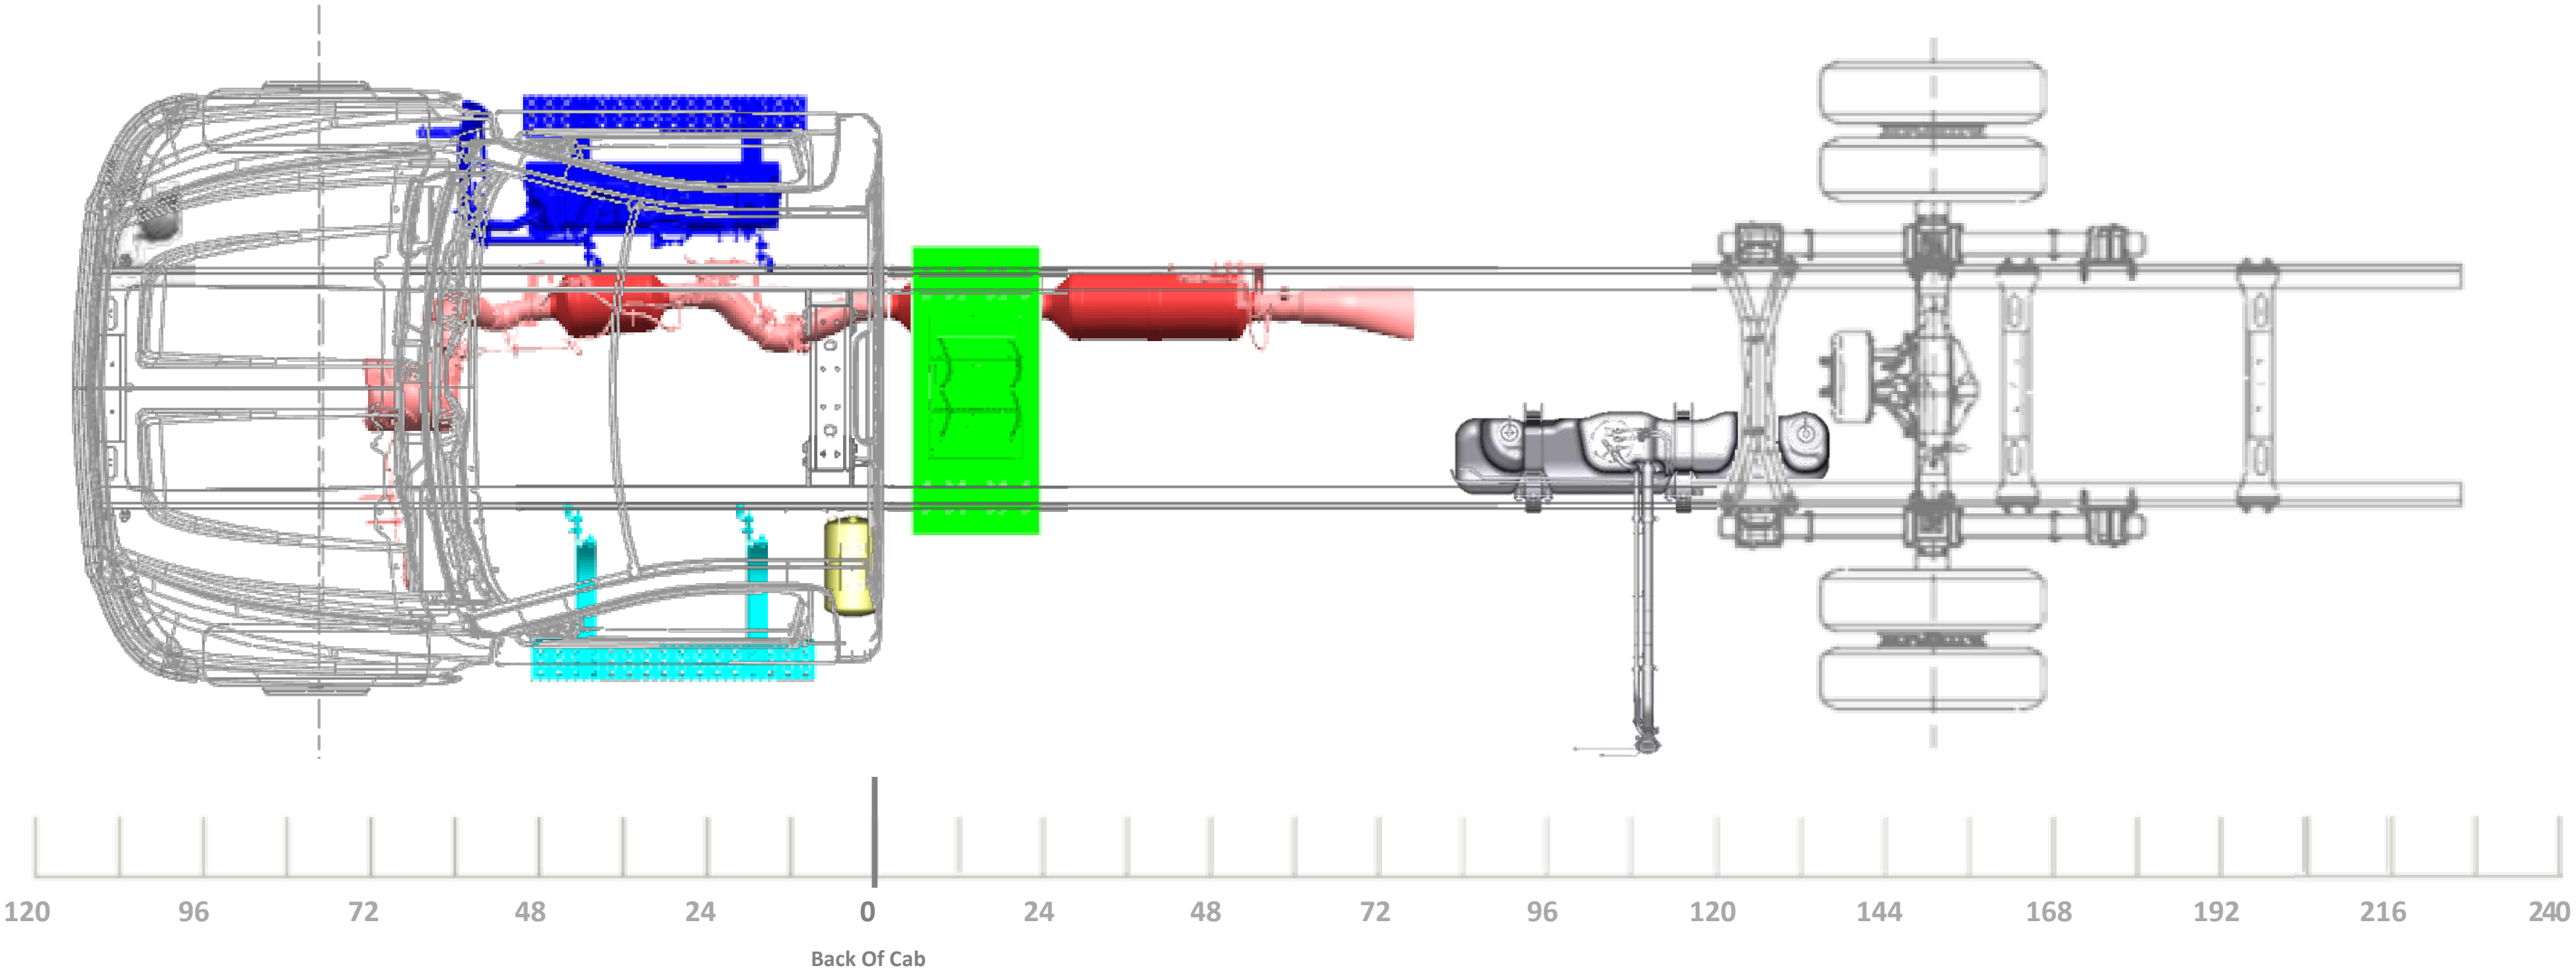
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

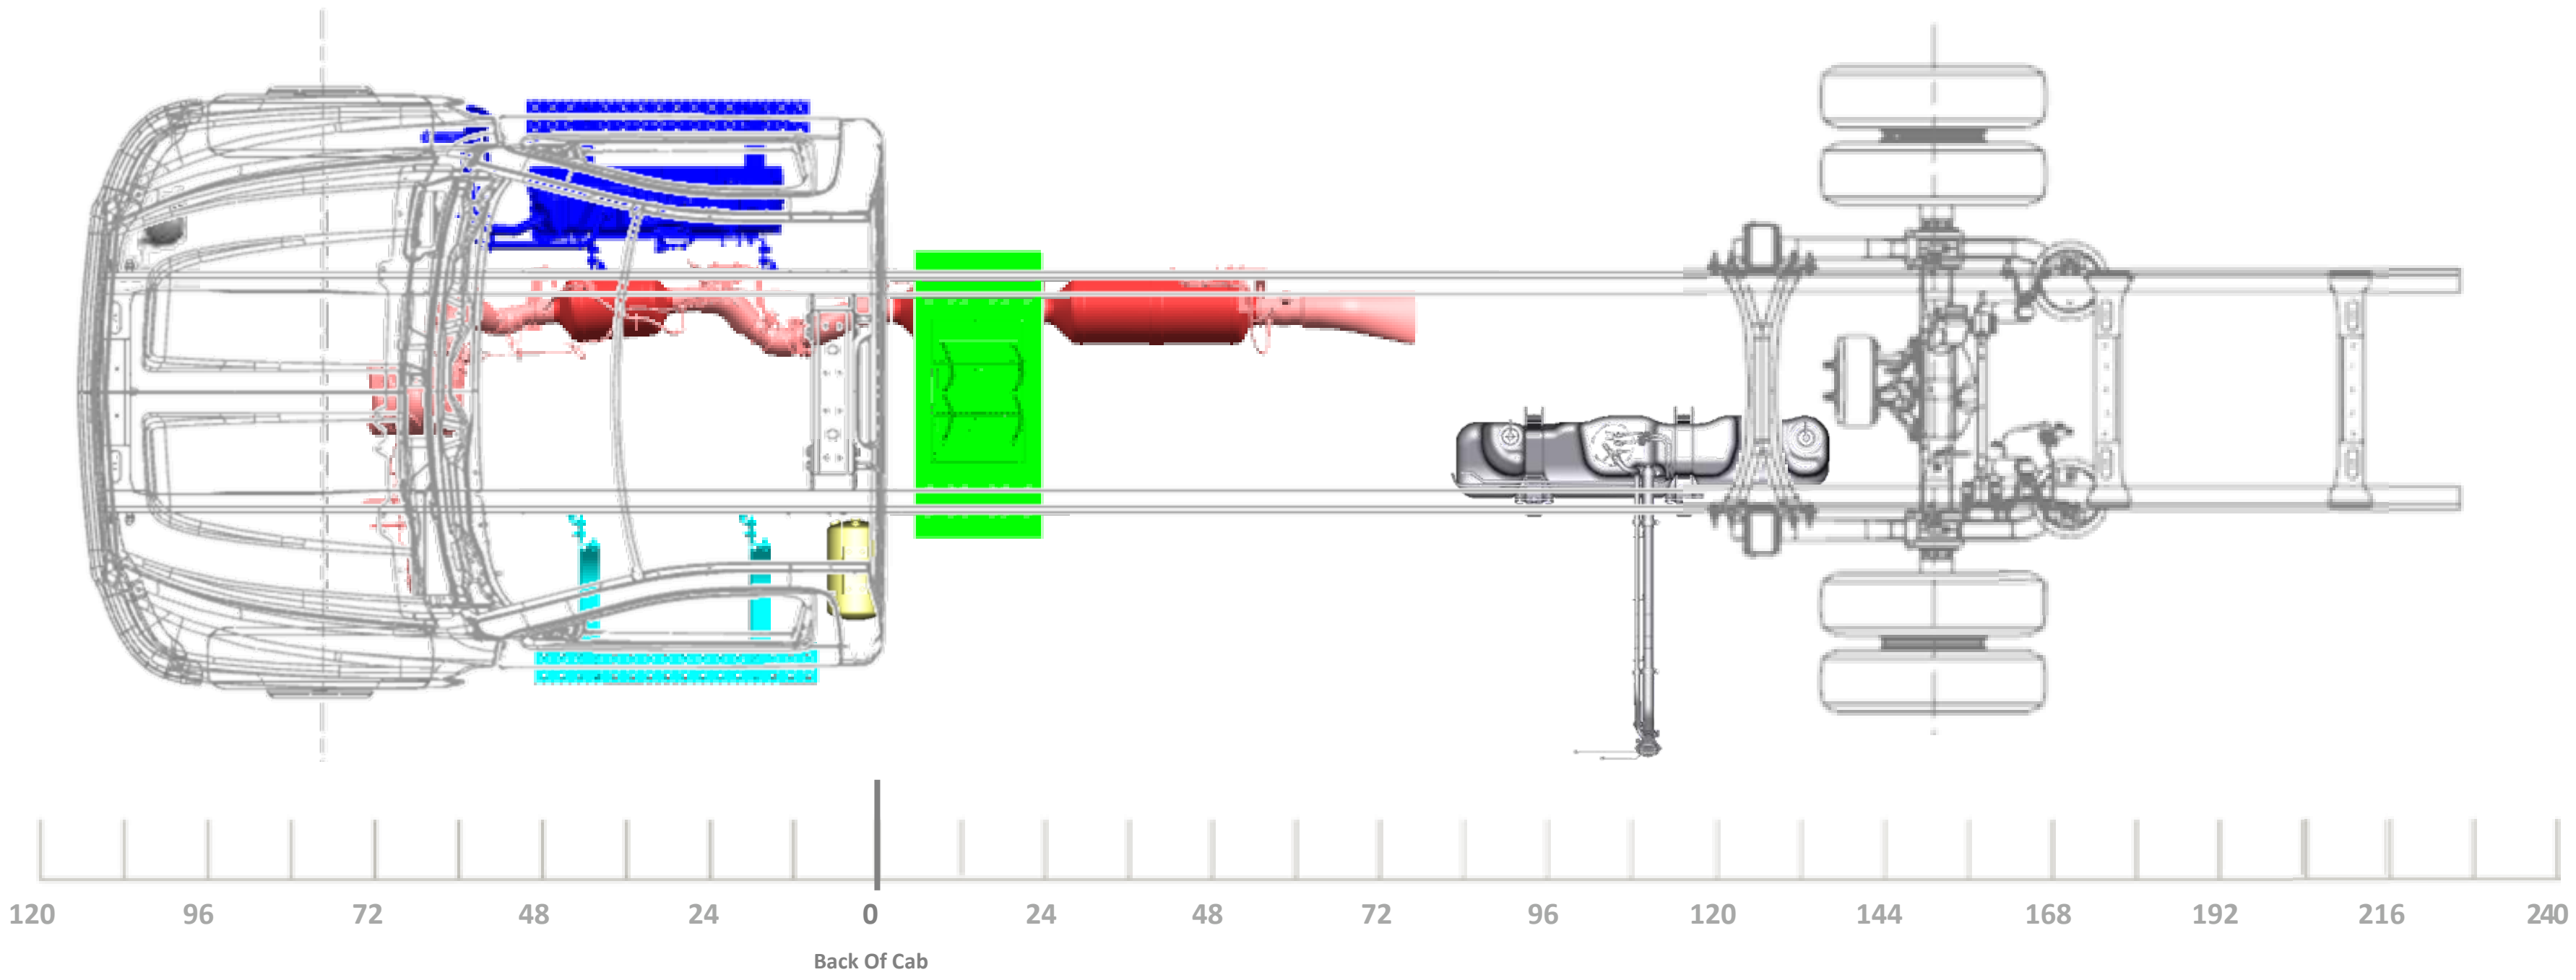
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

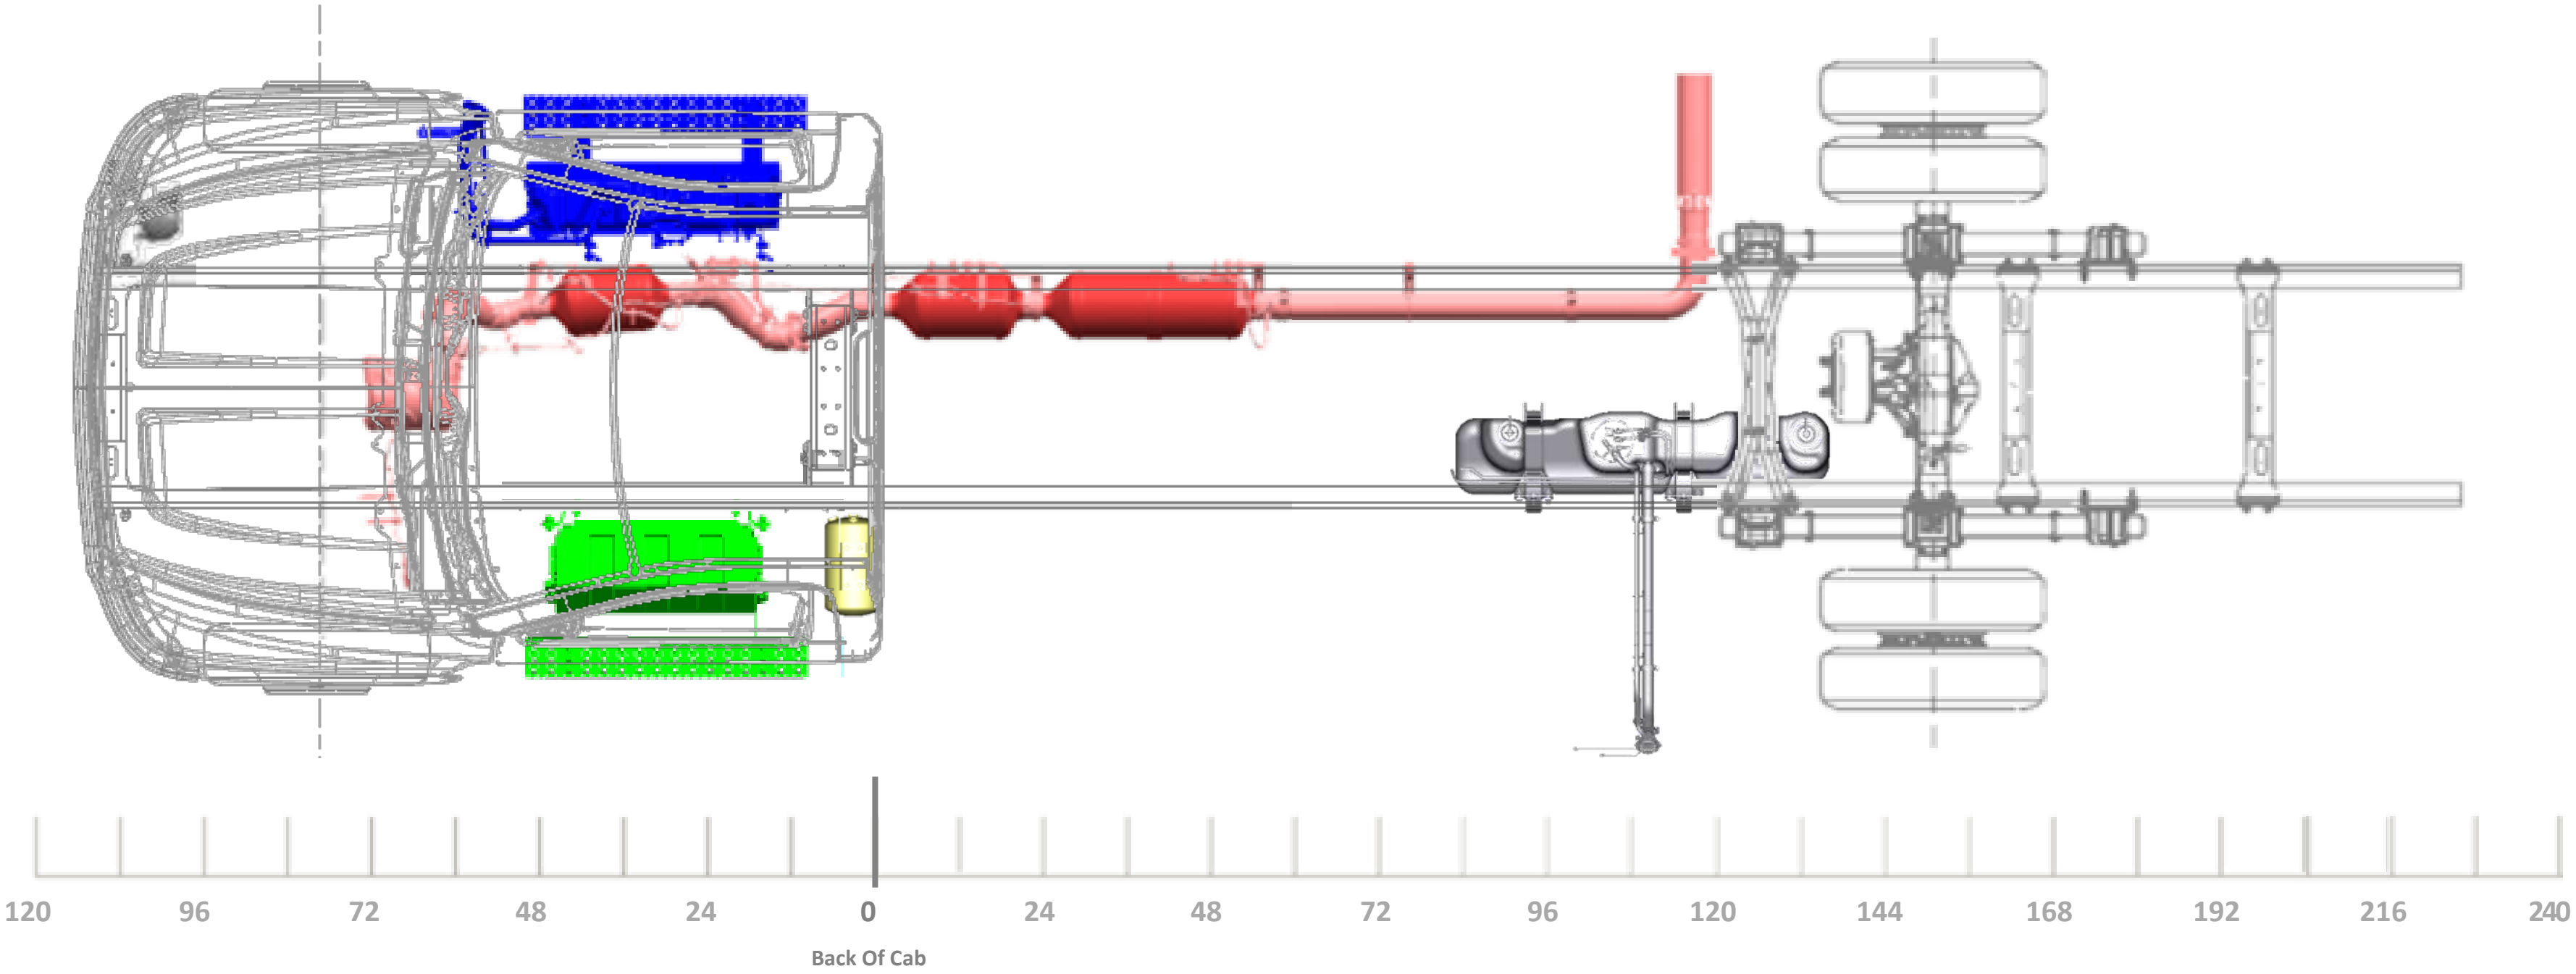
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

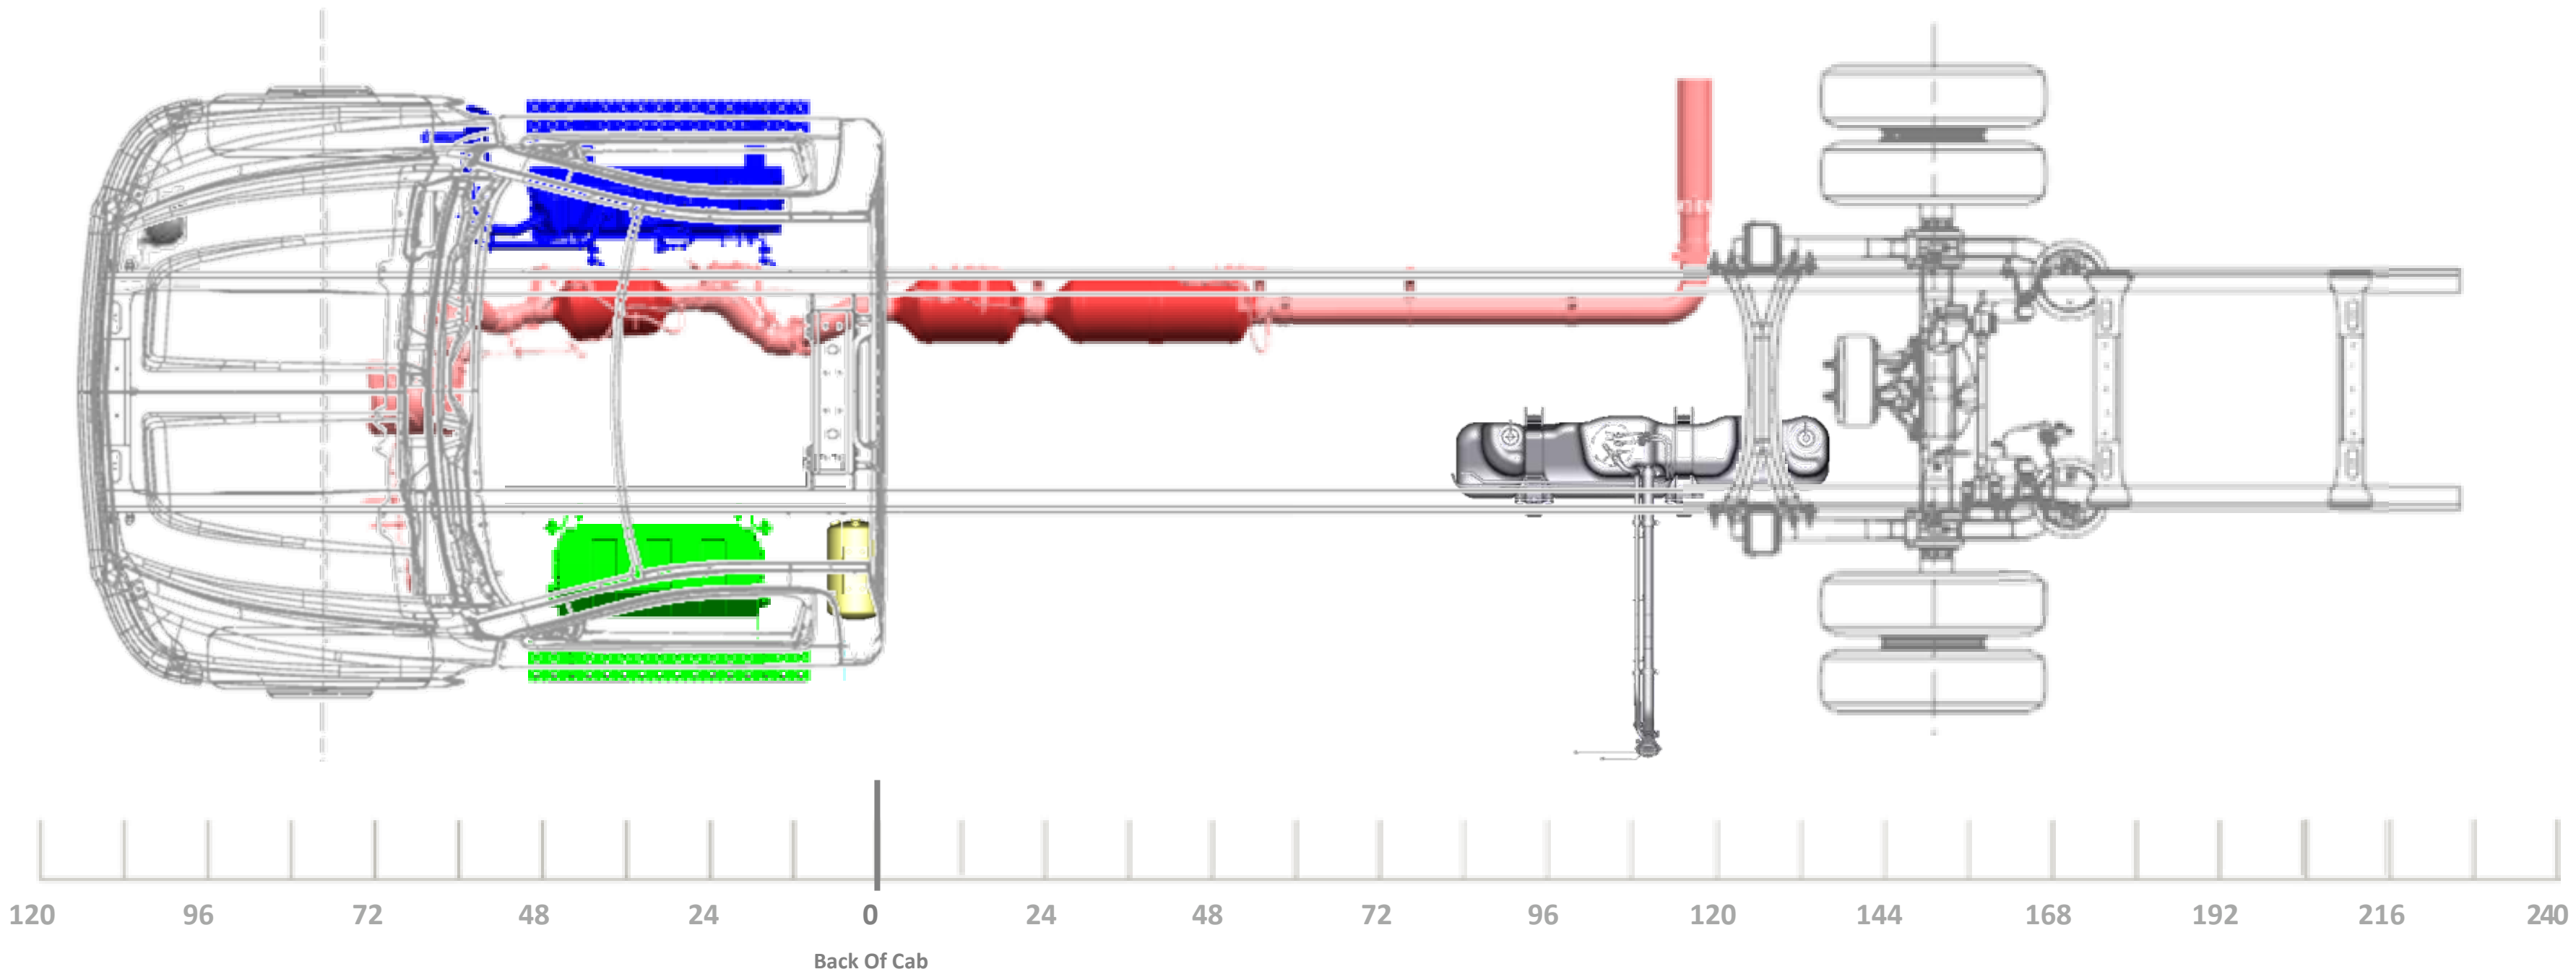

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

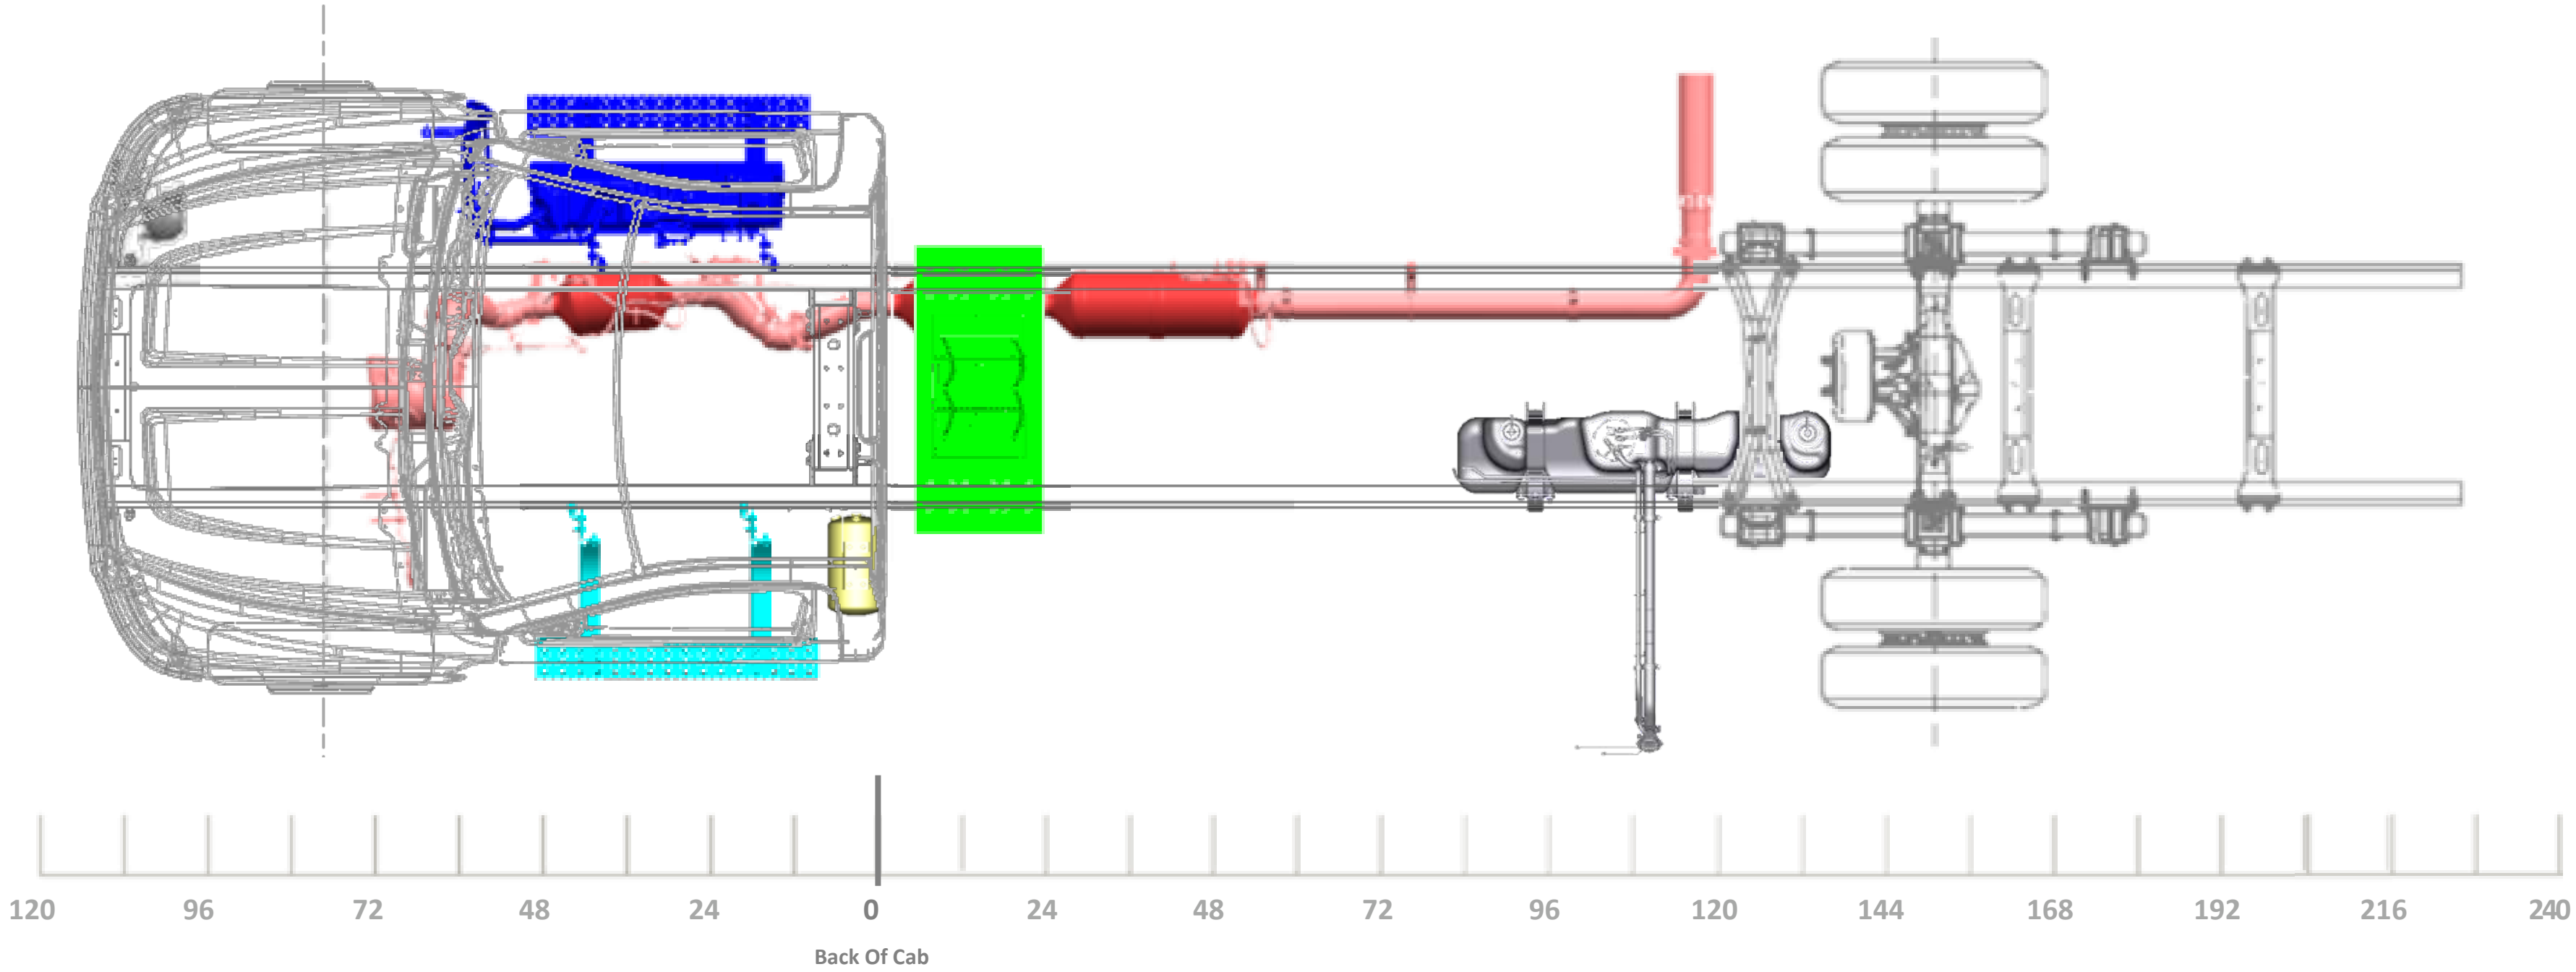
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

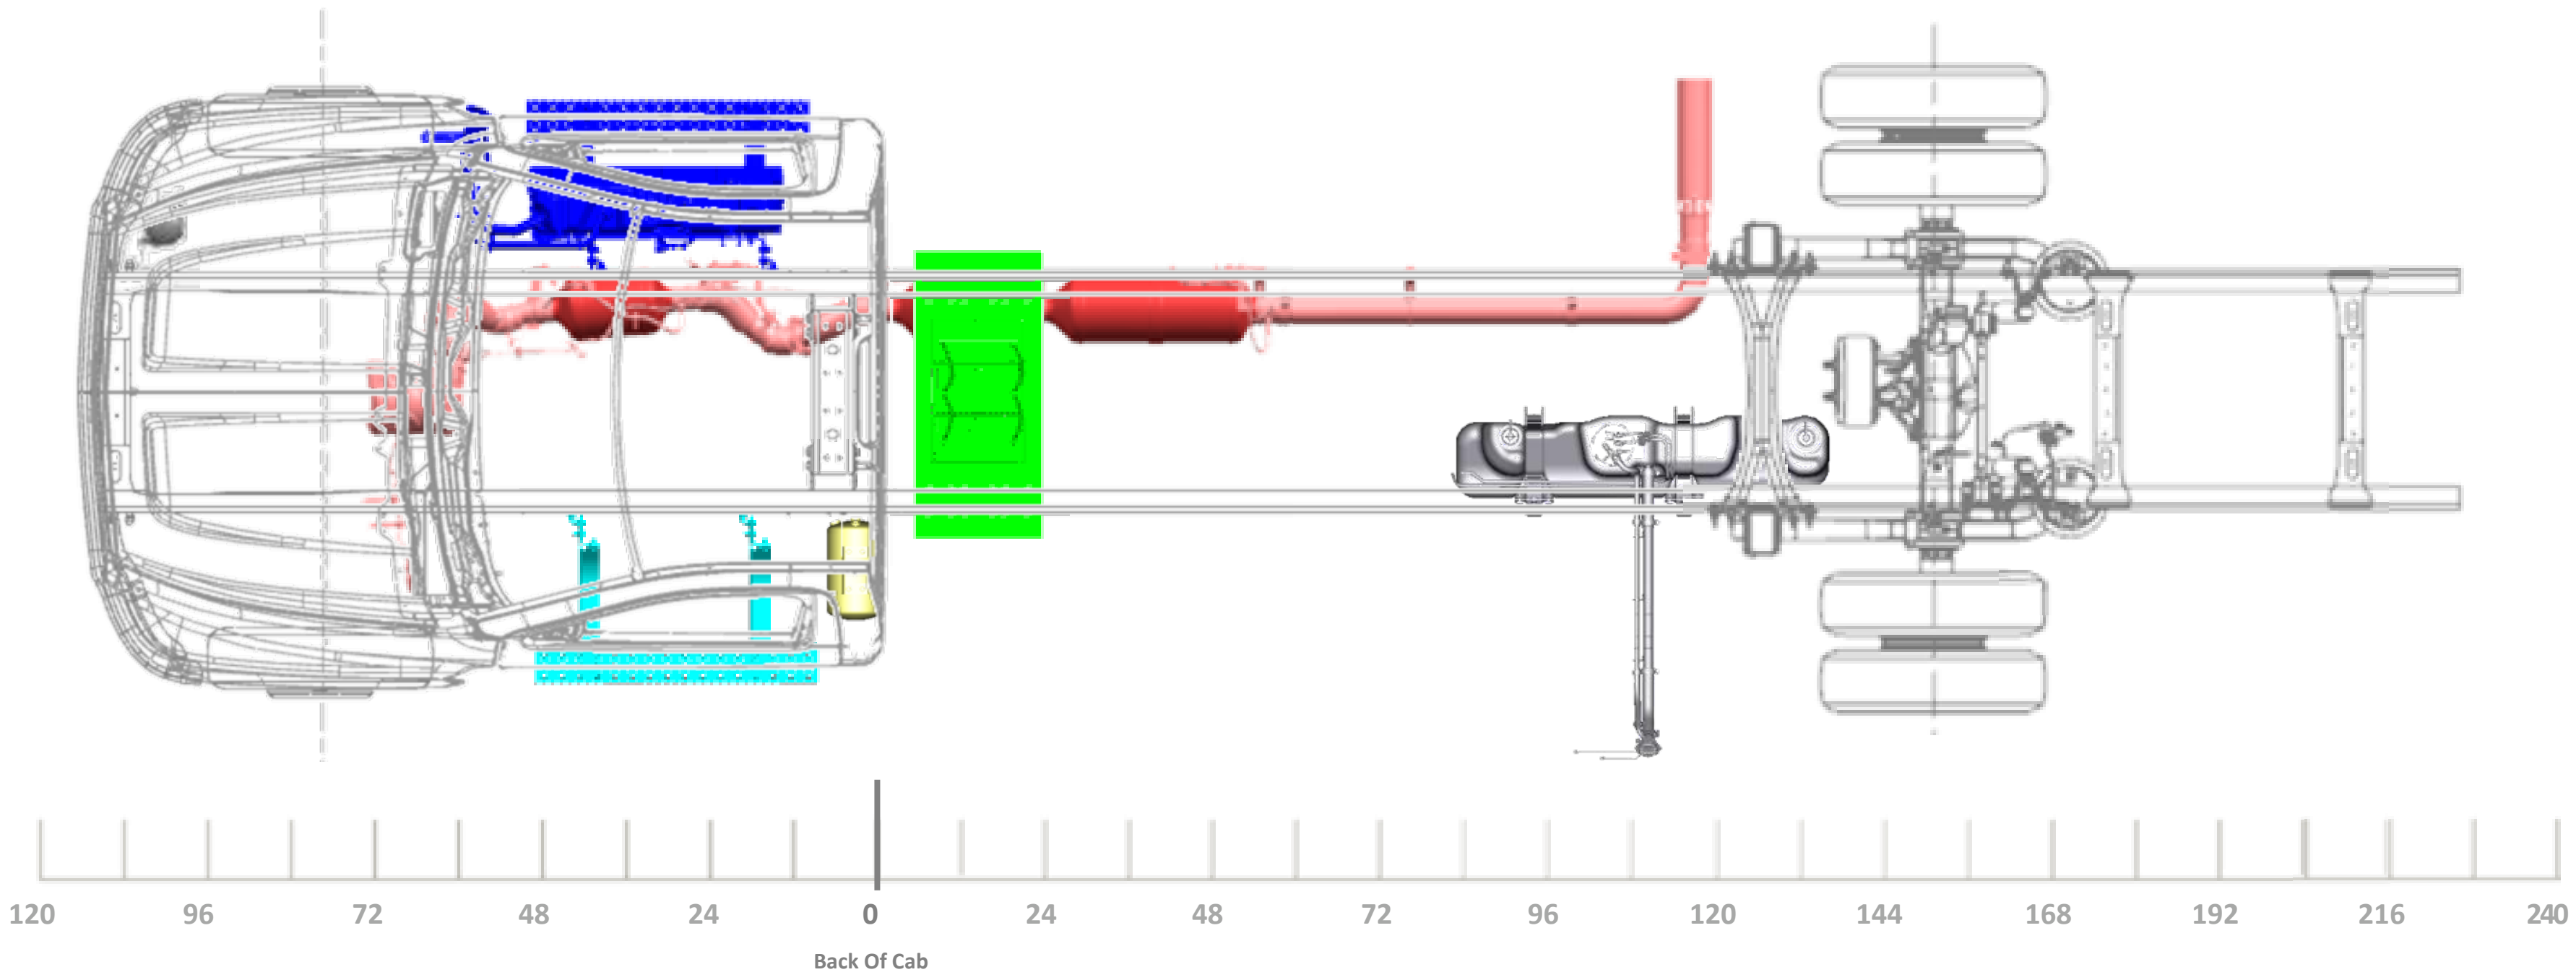
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

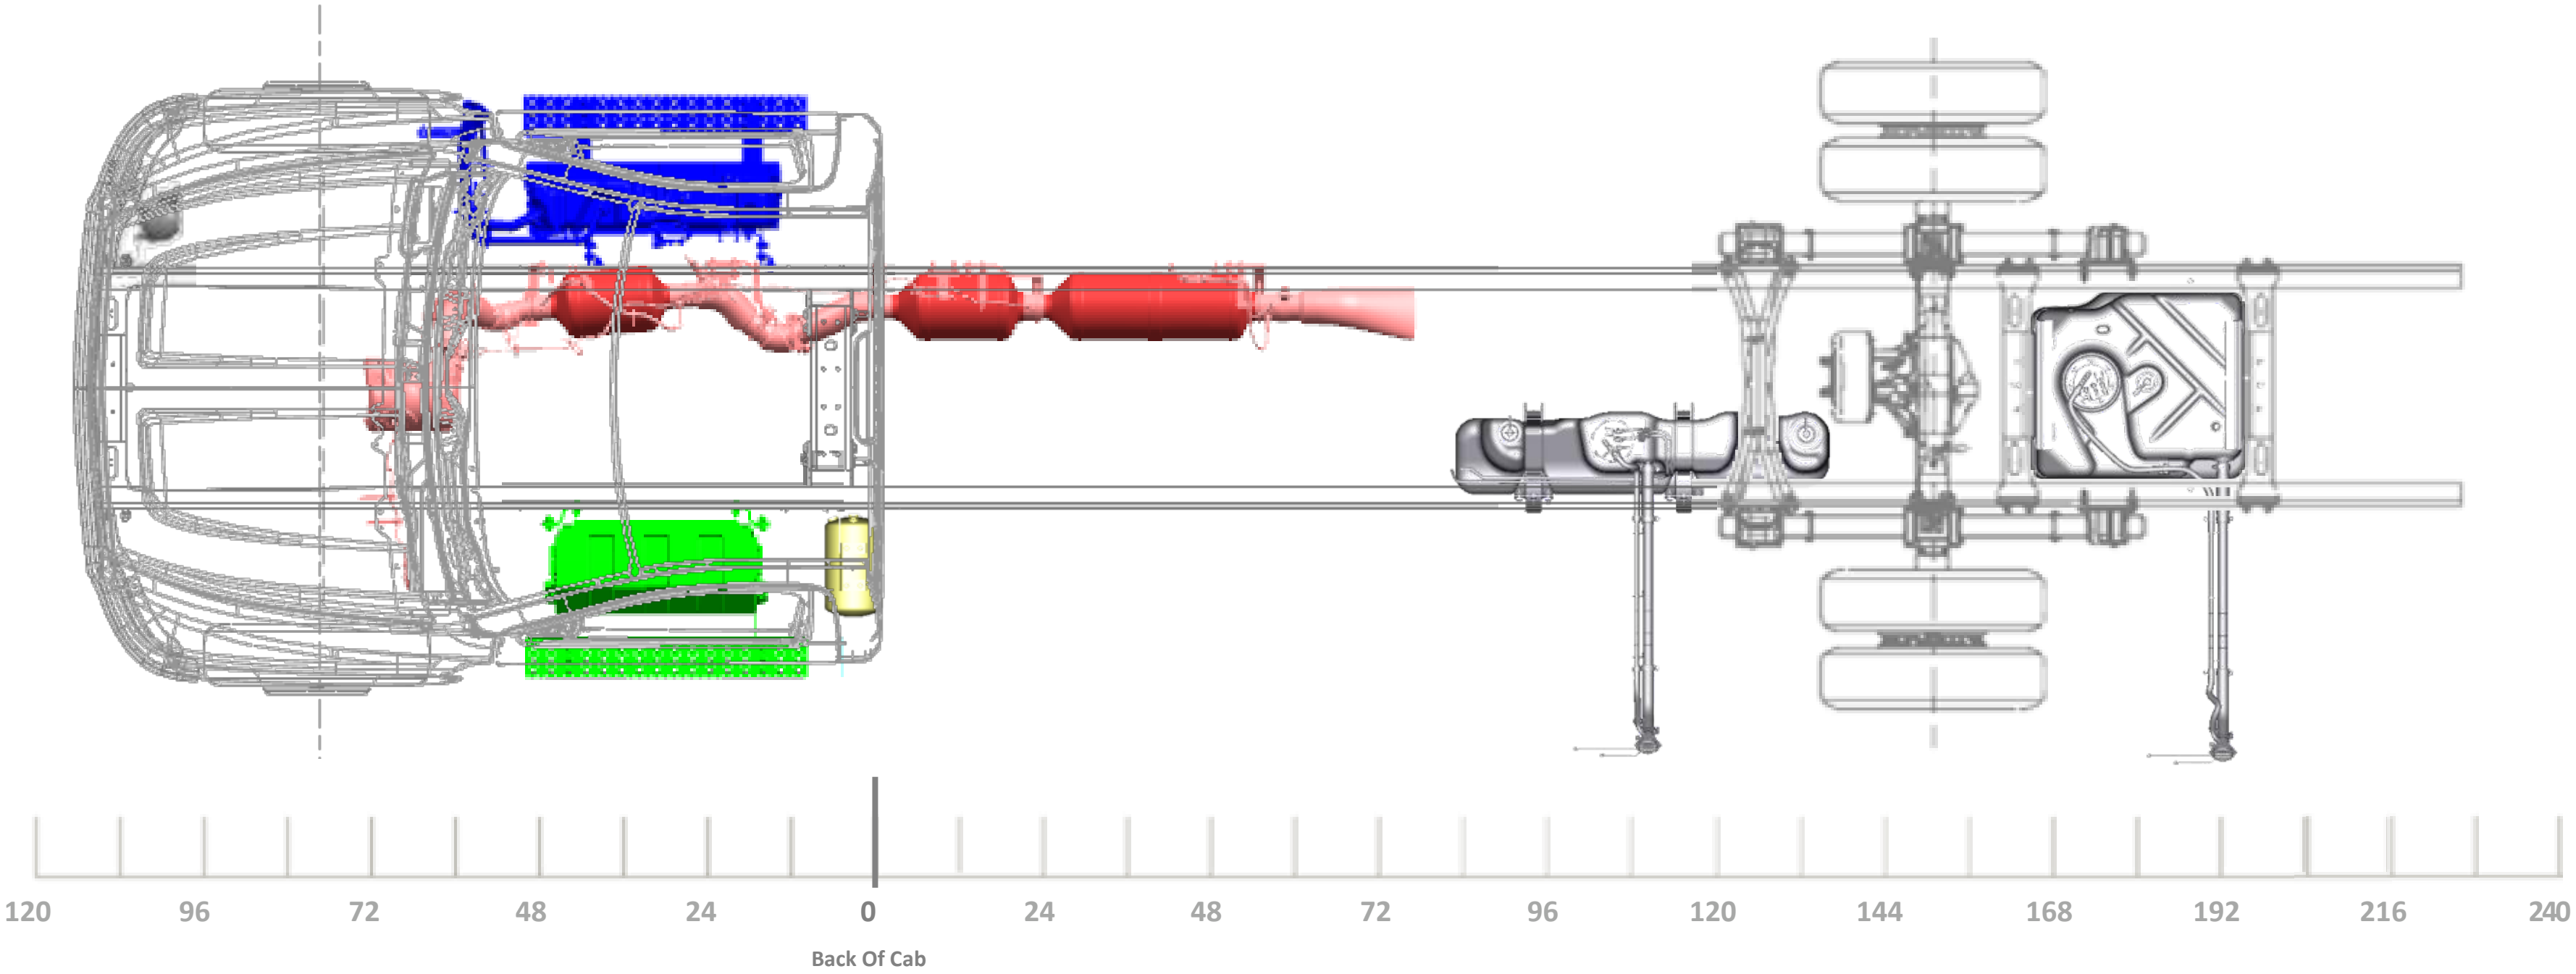
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

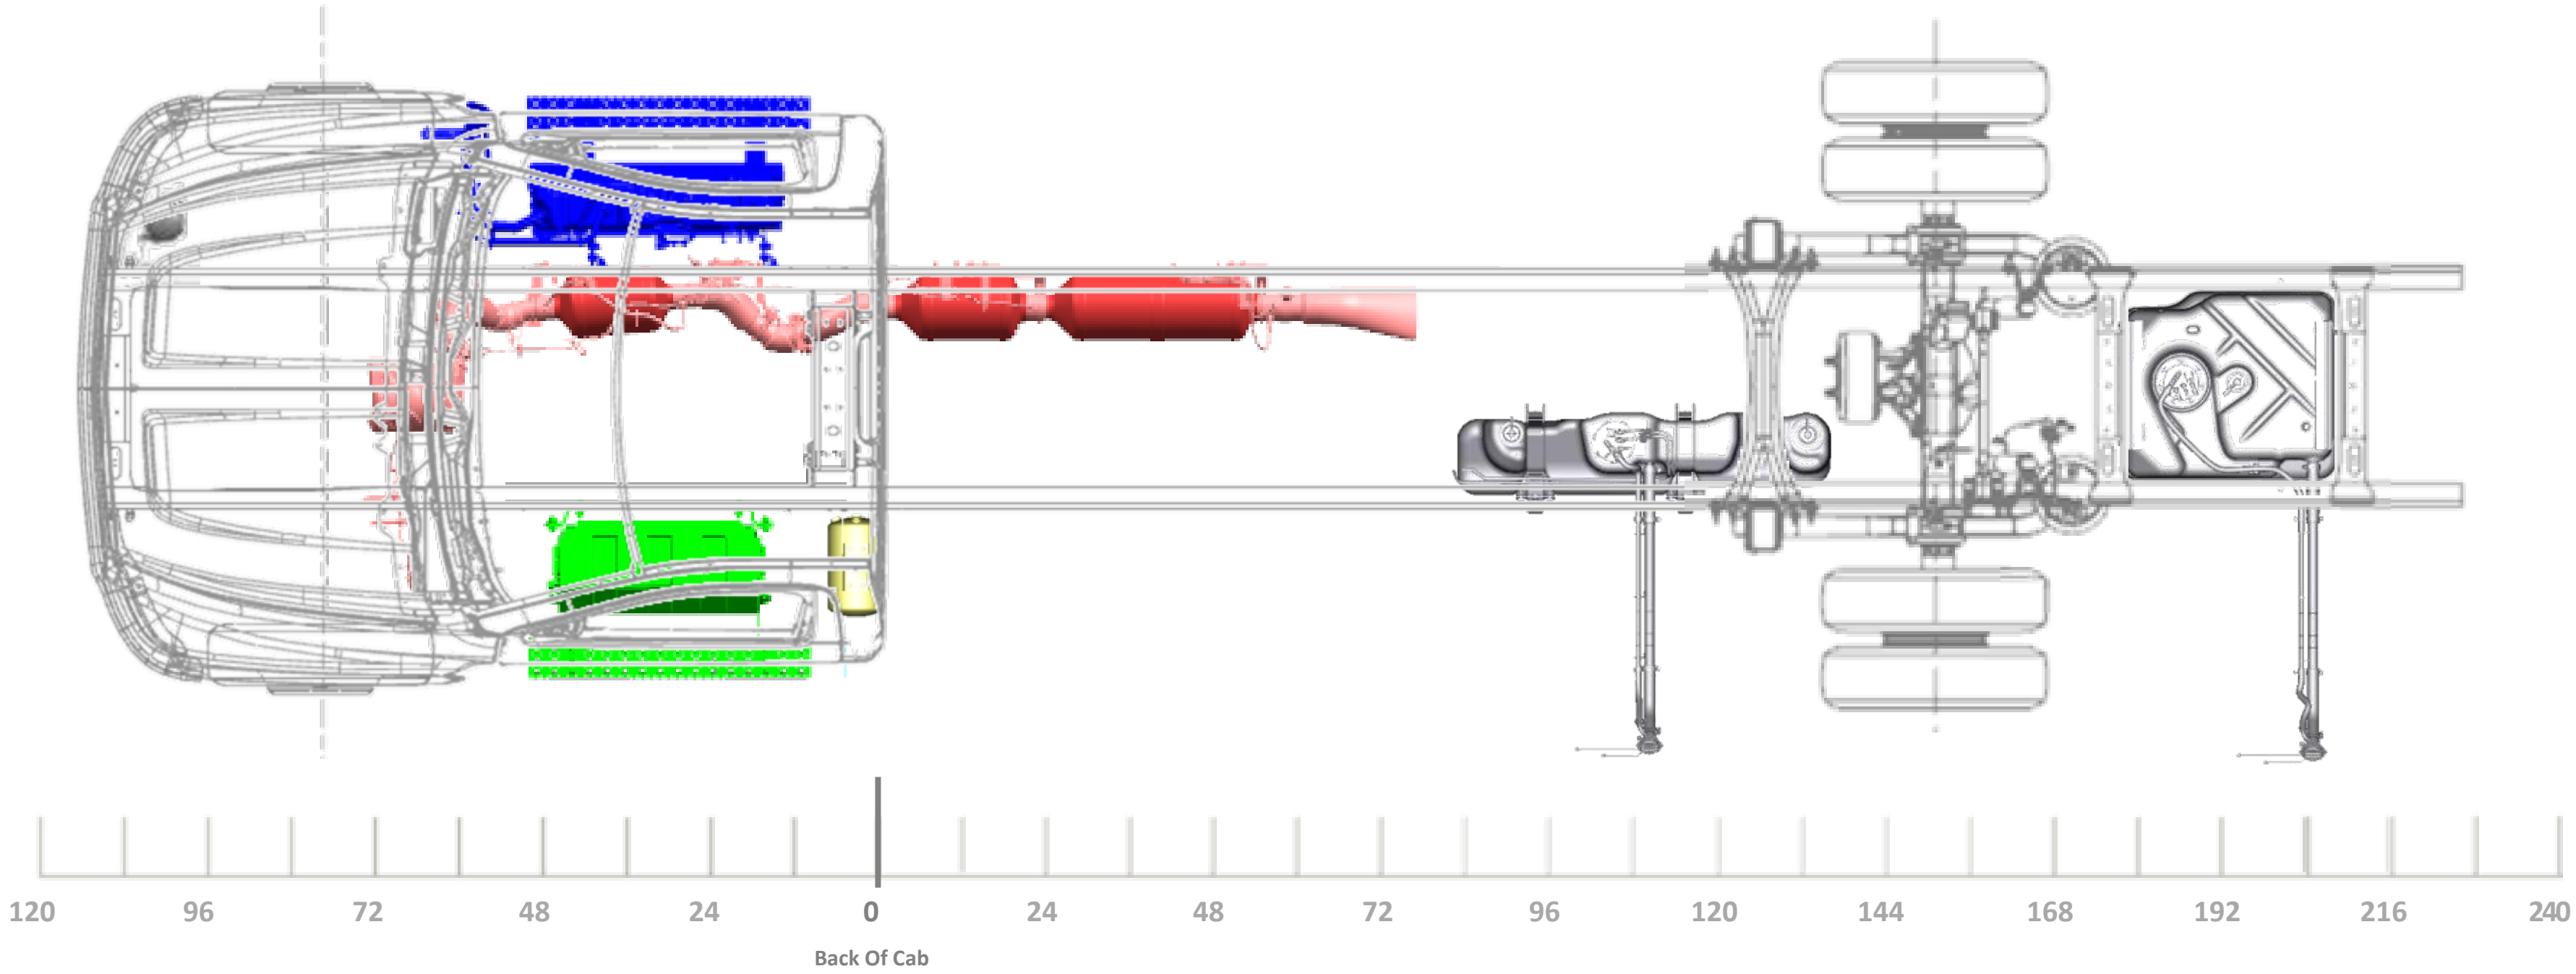
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

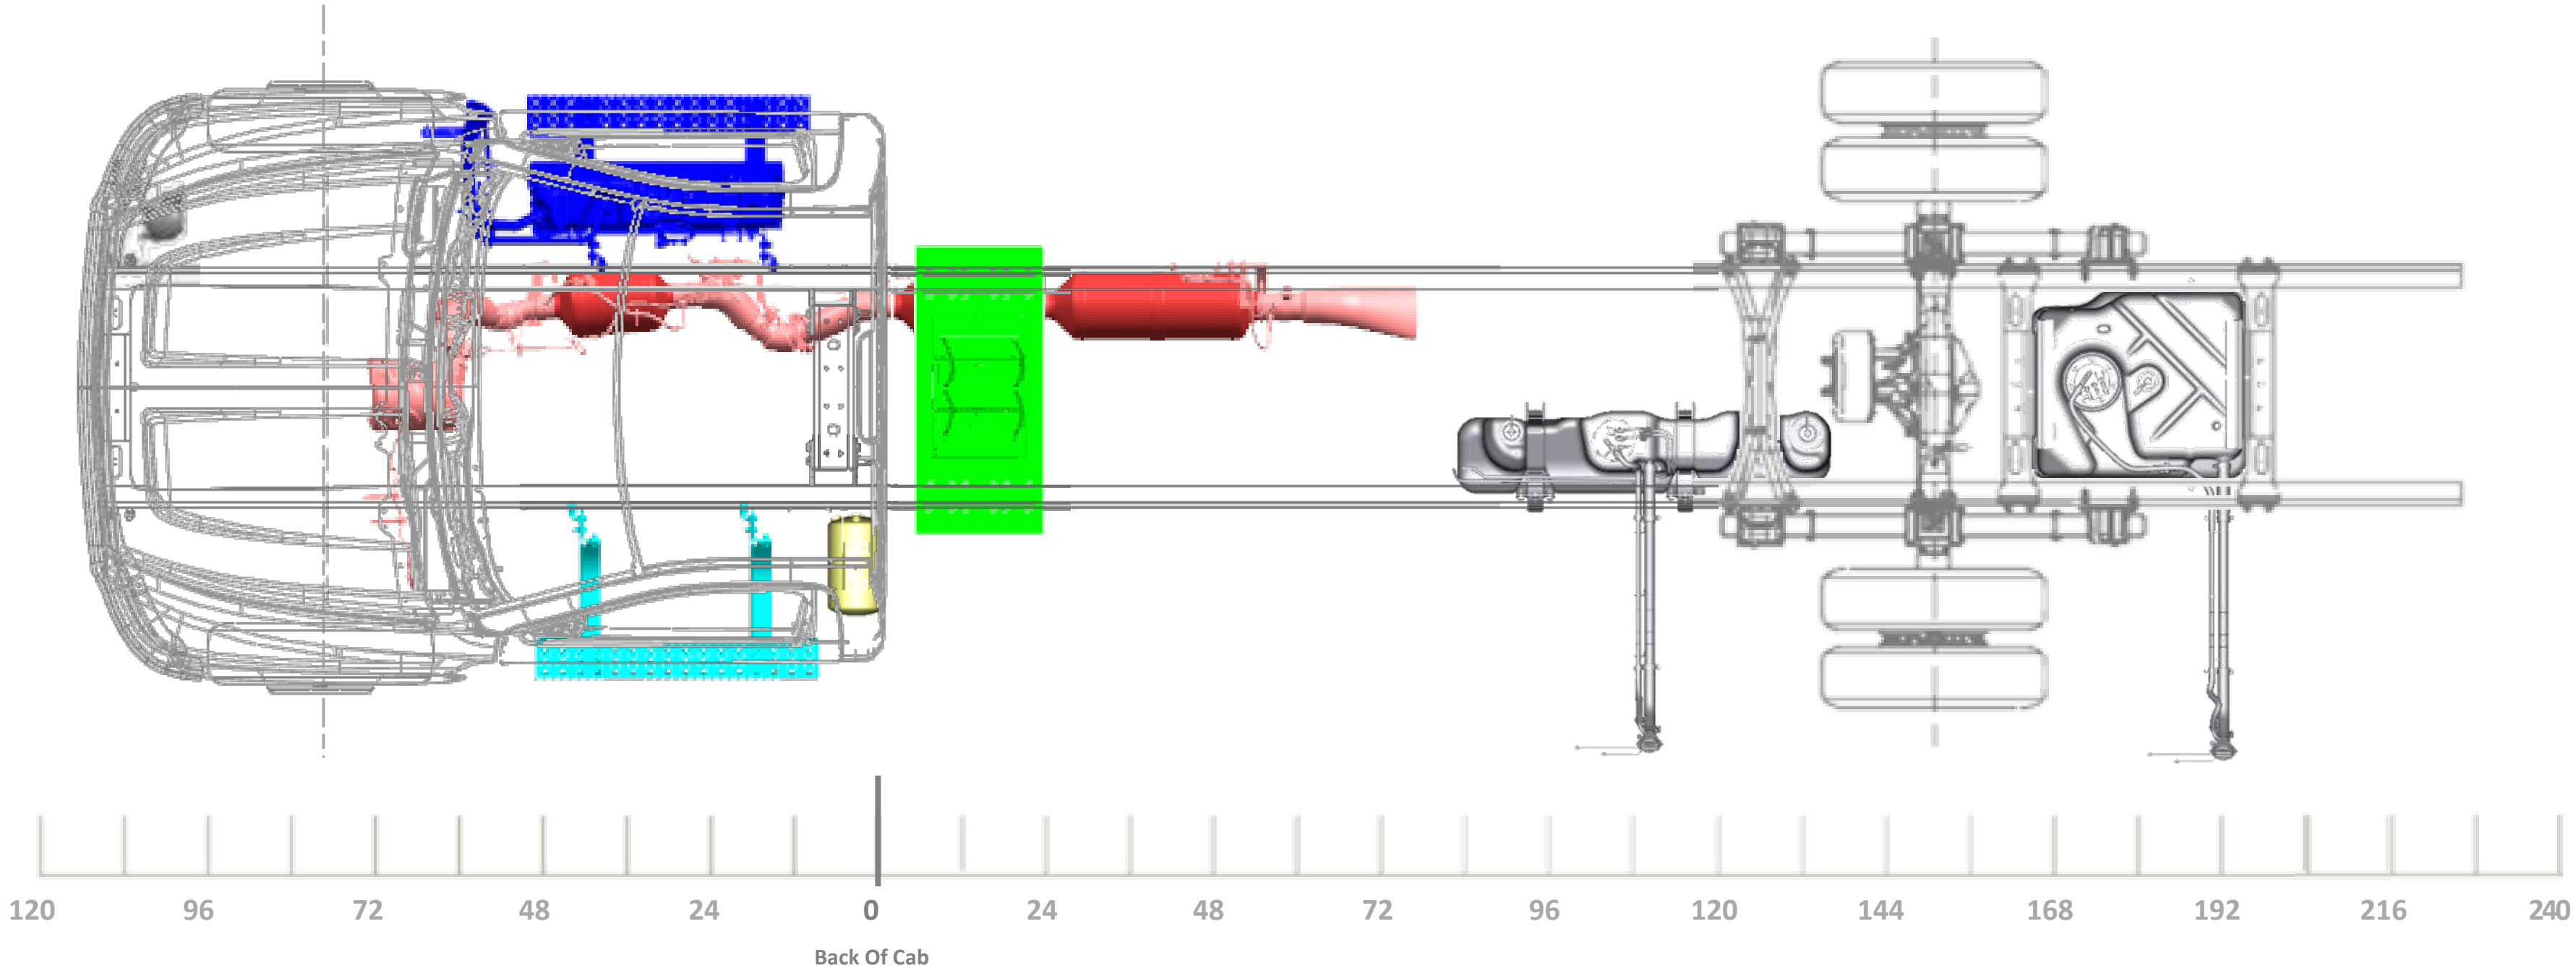
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

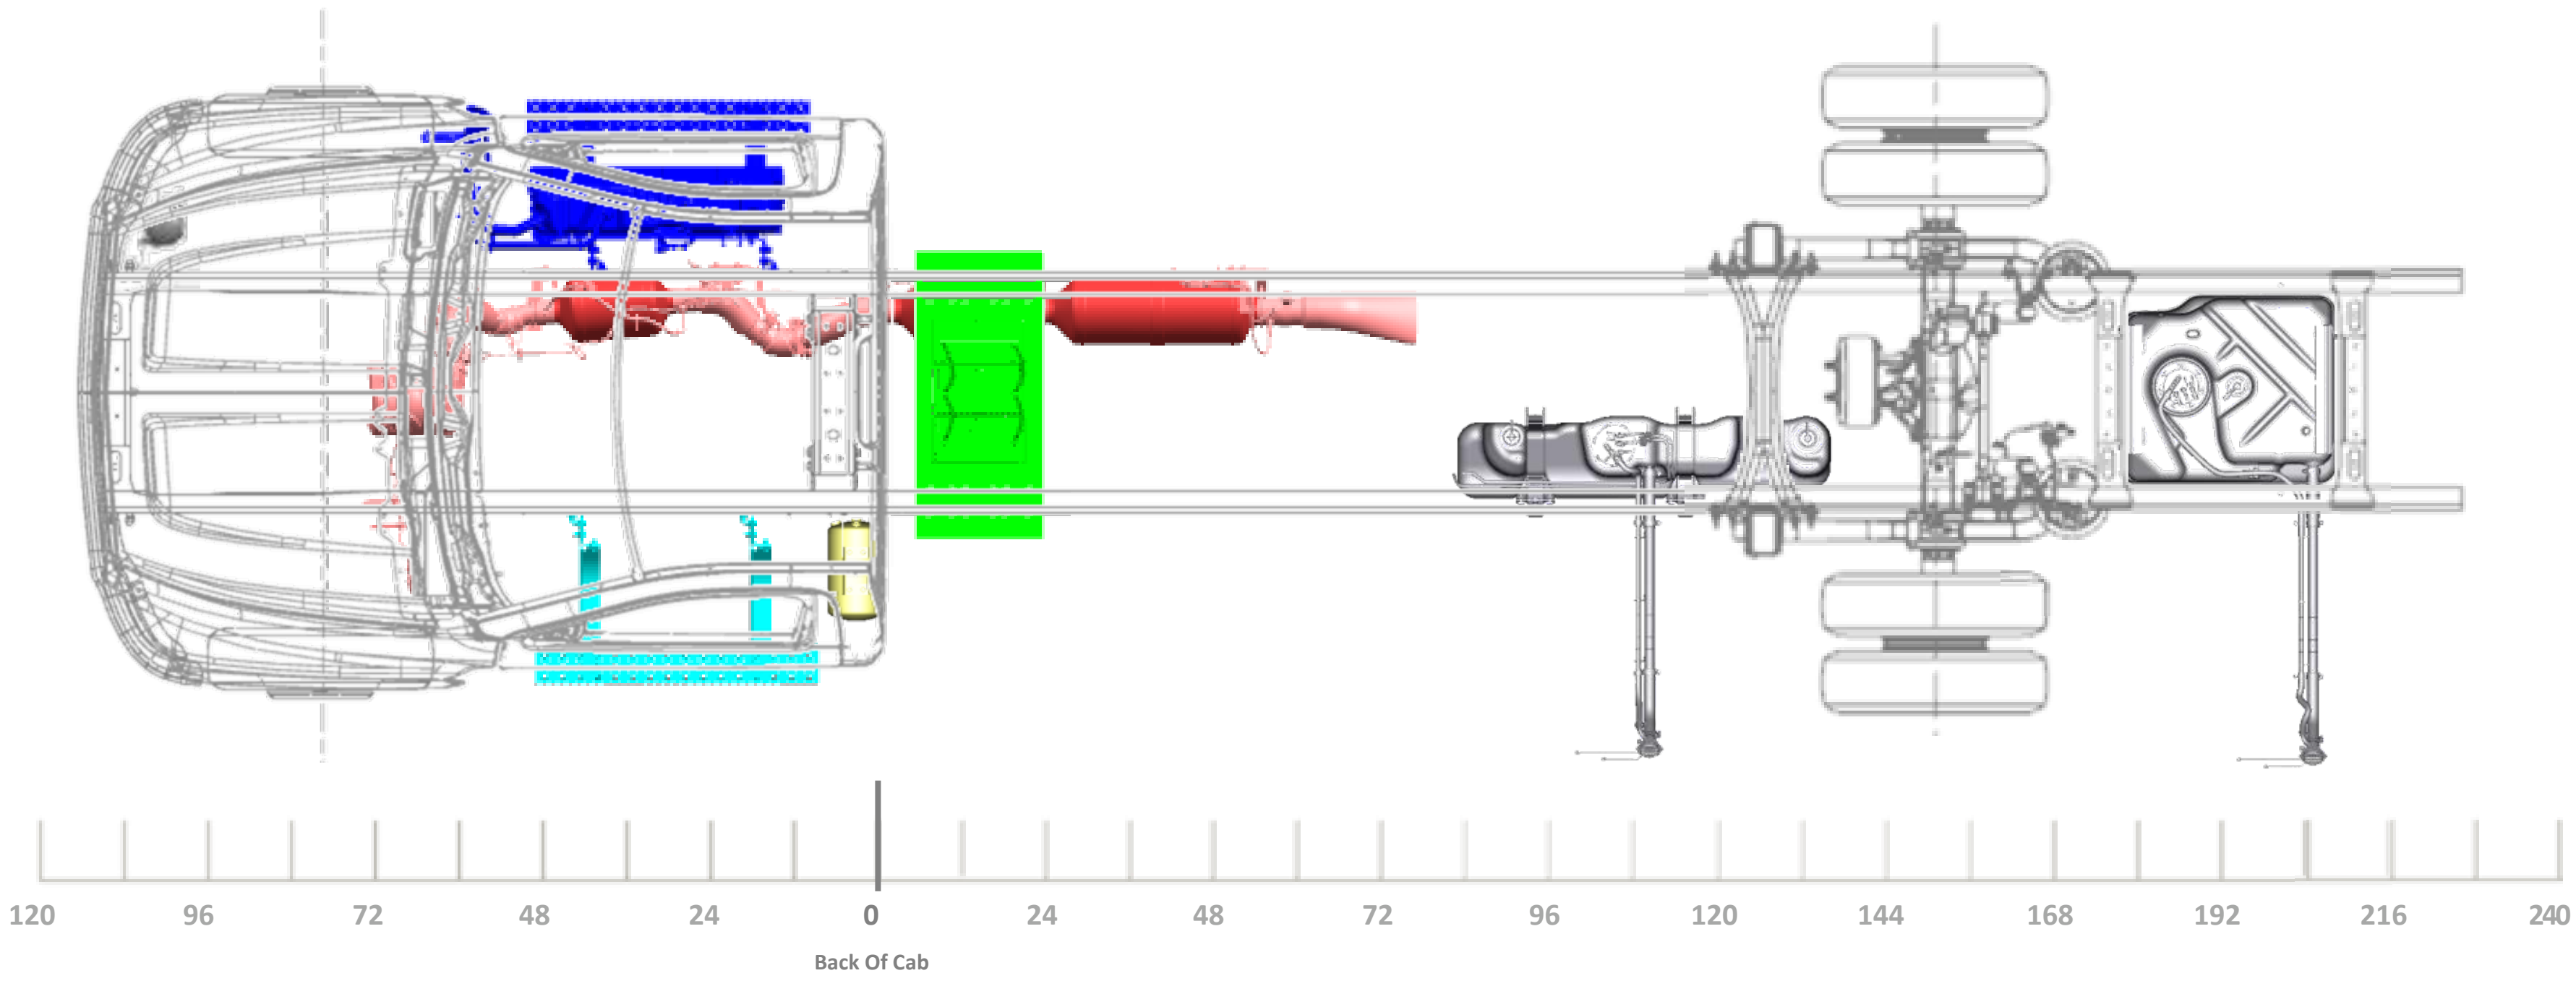
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

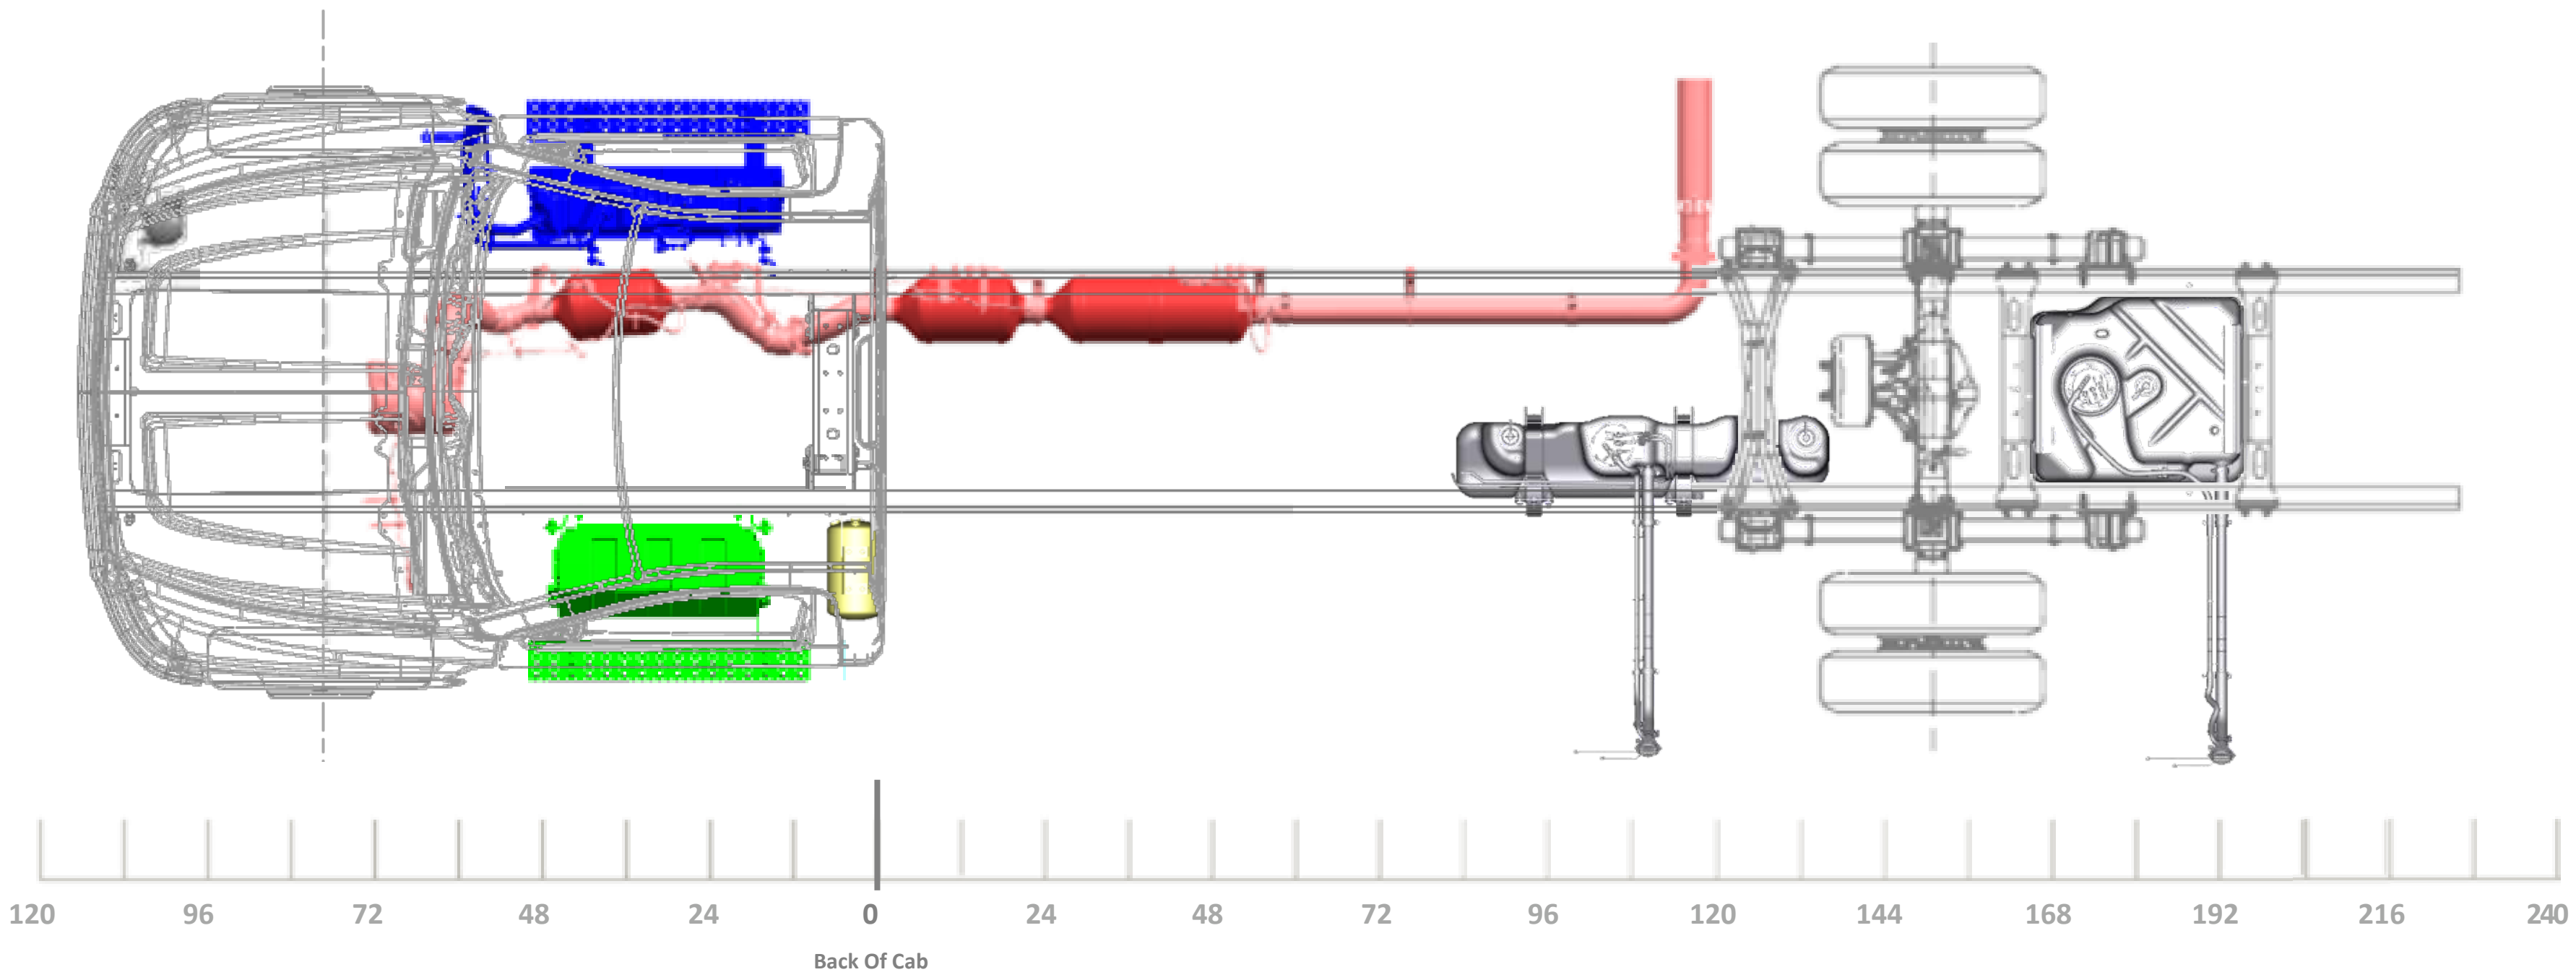
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

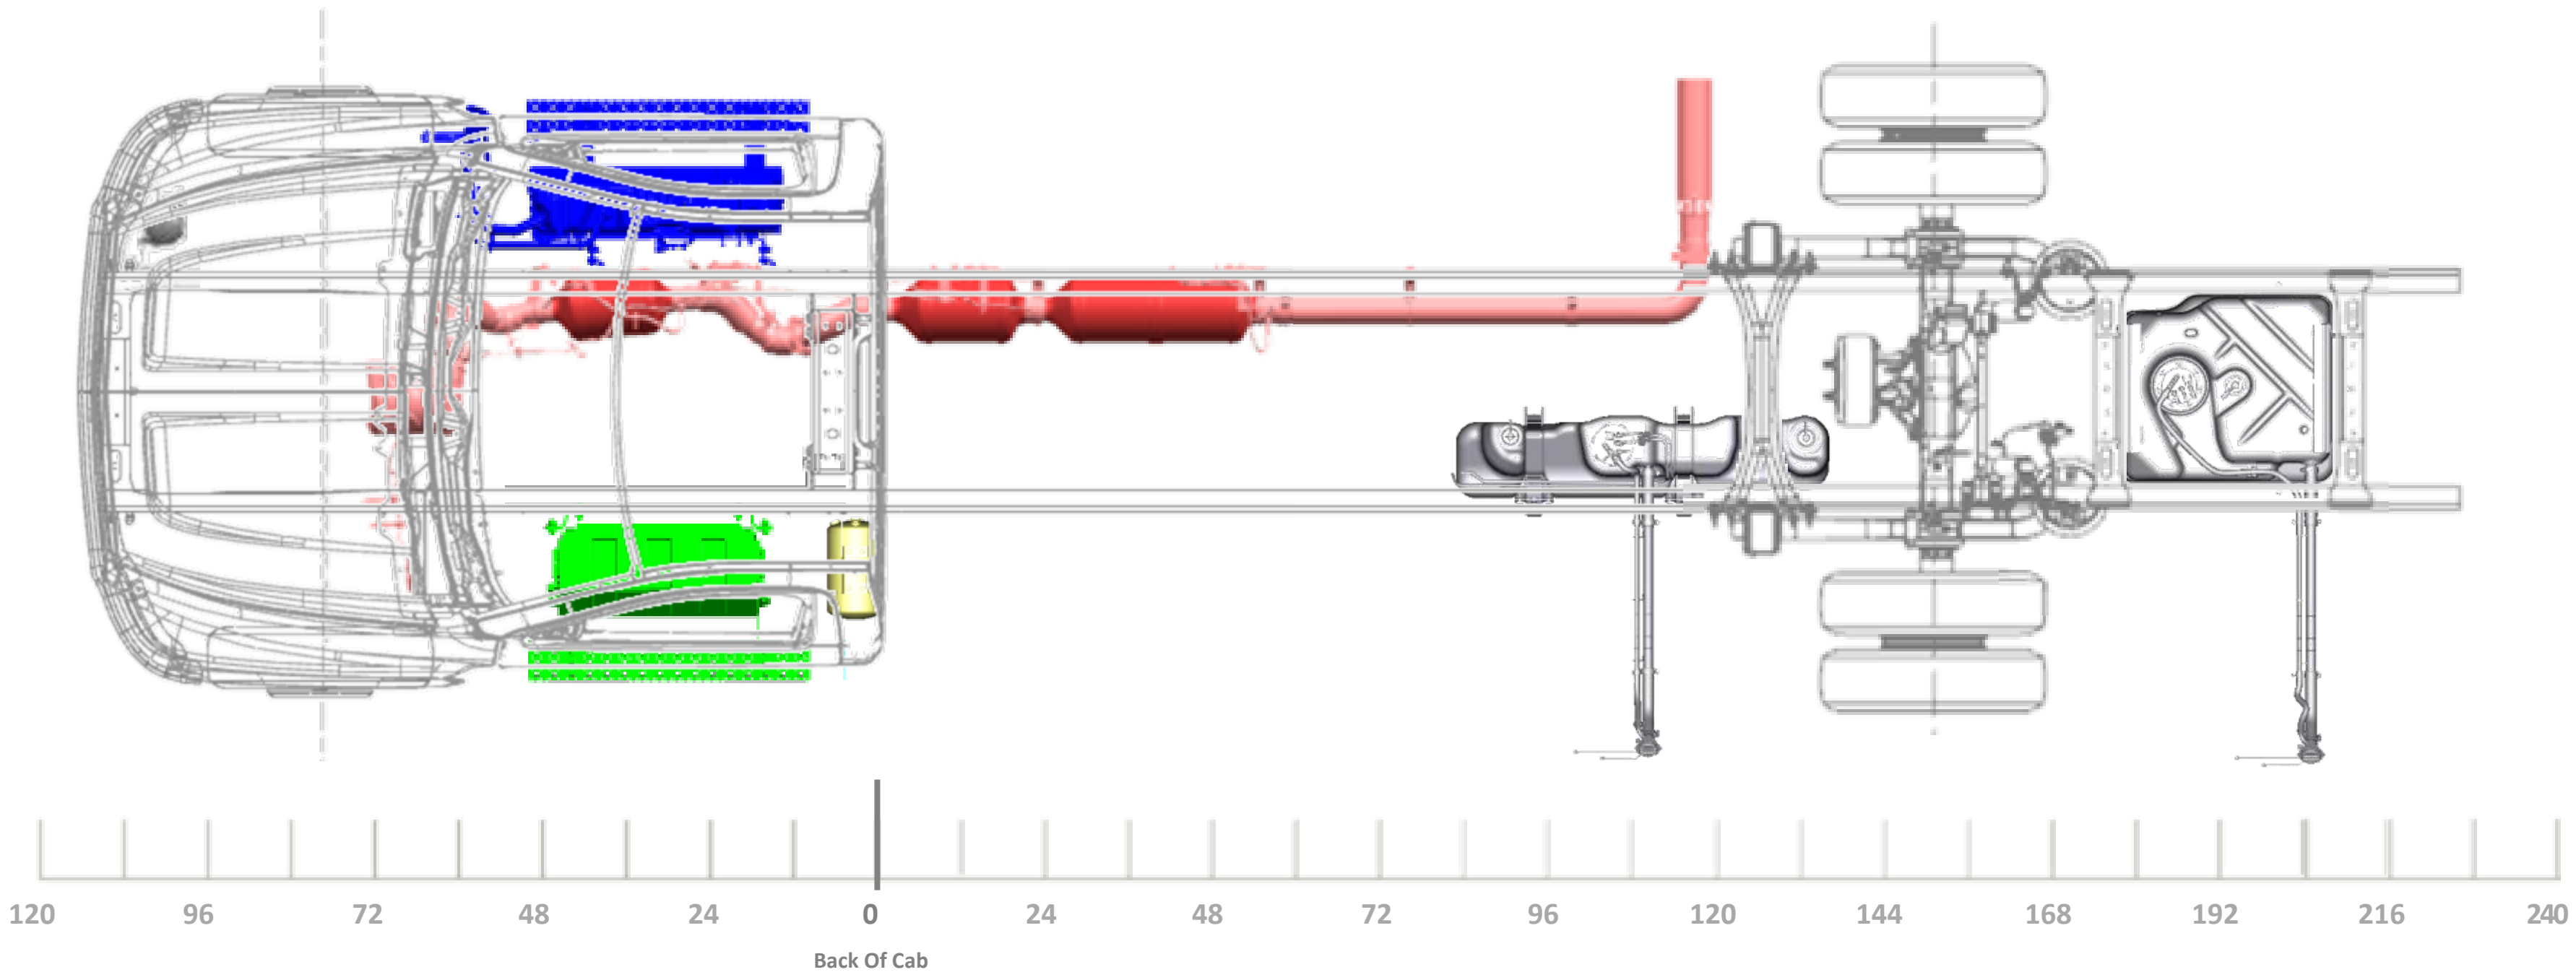
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

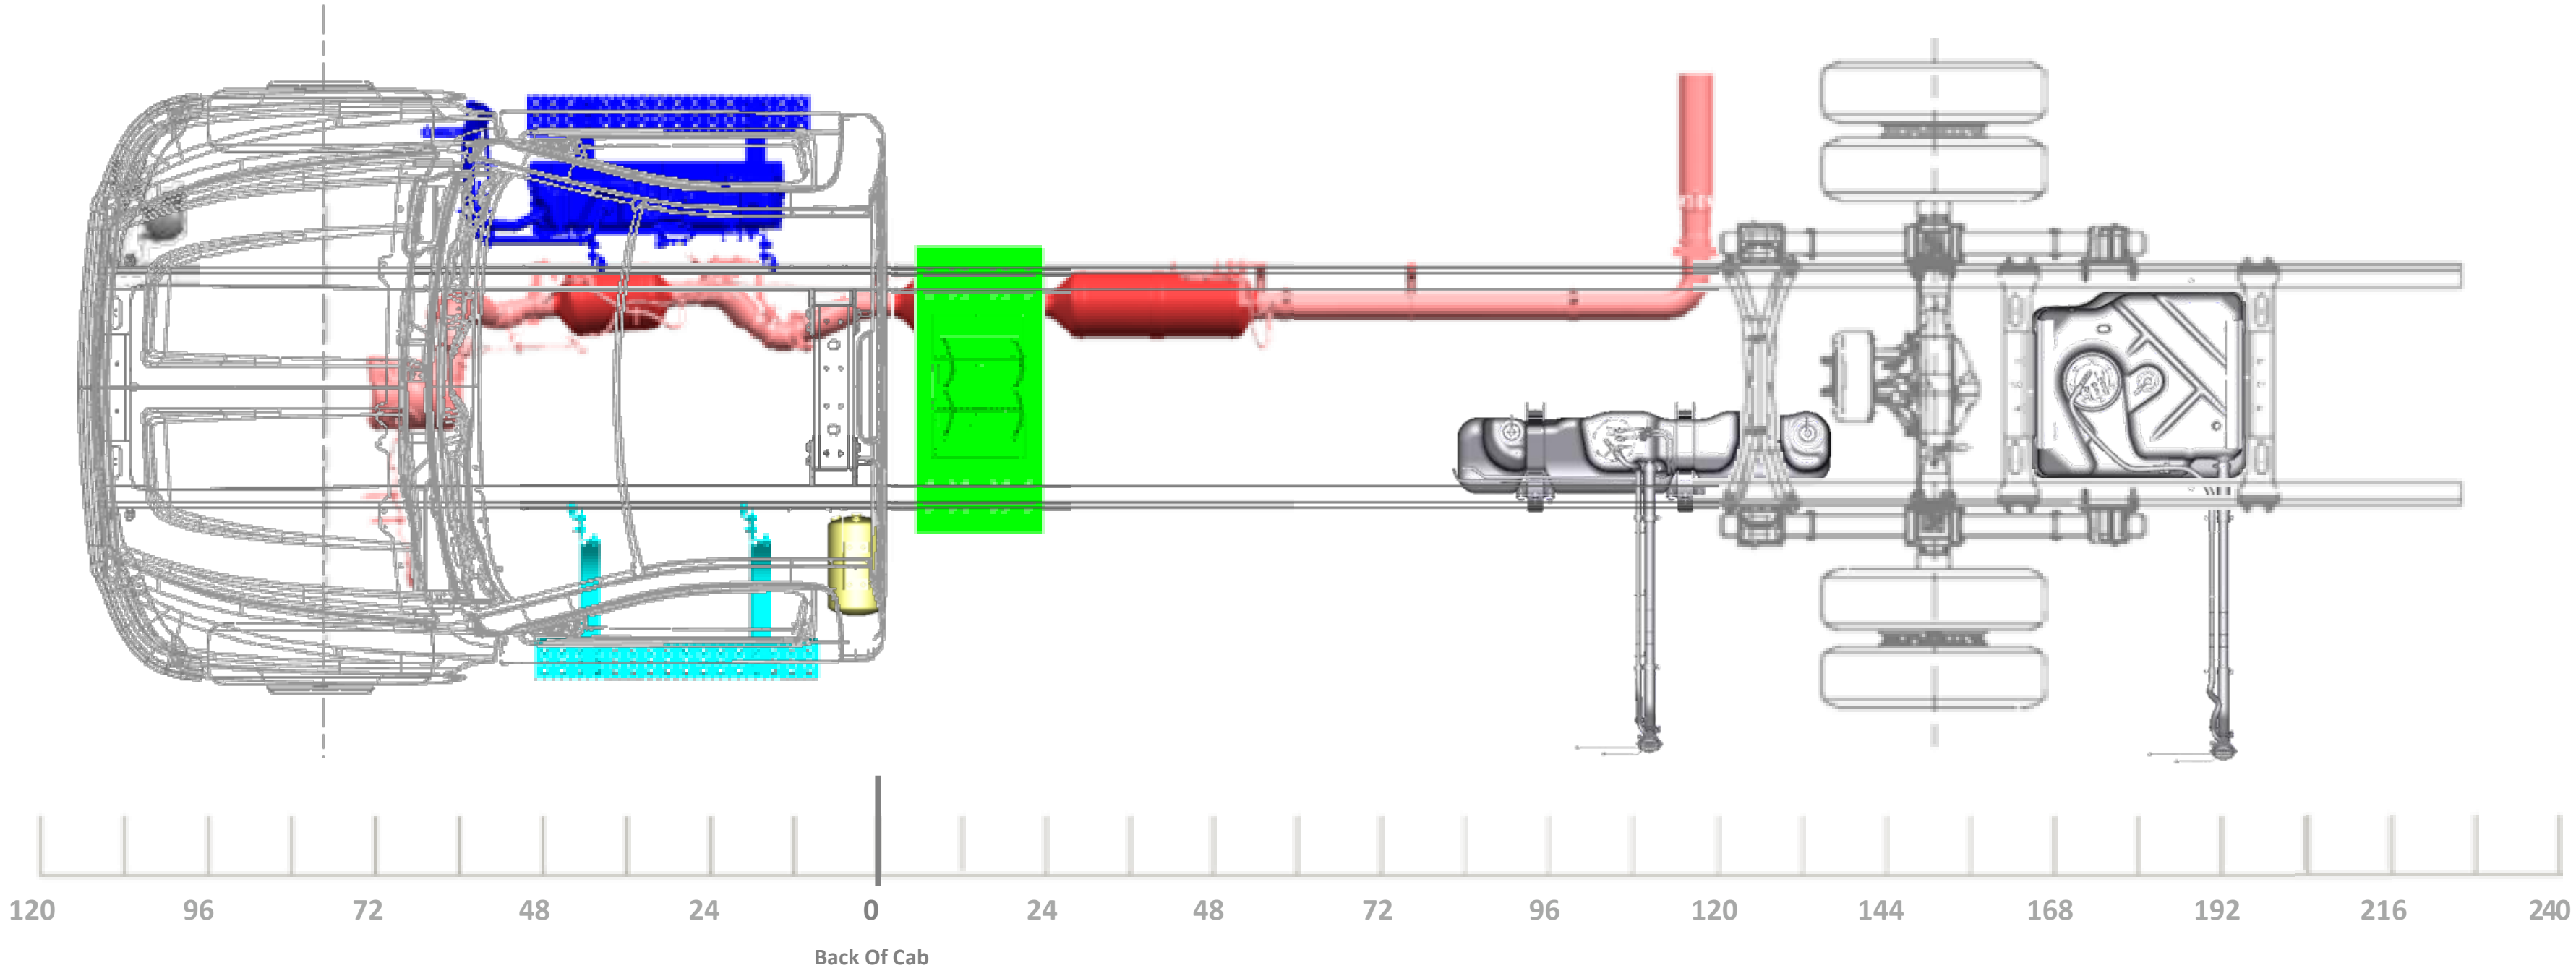
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA)
91” AF

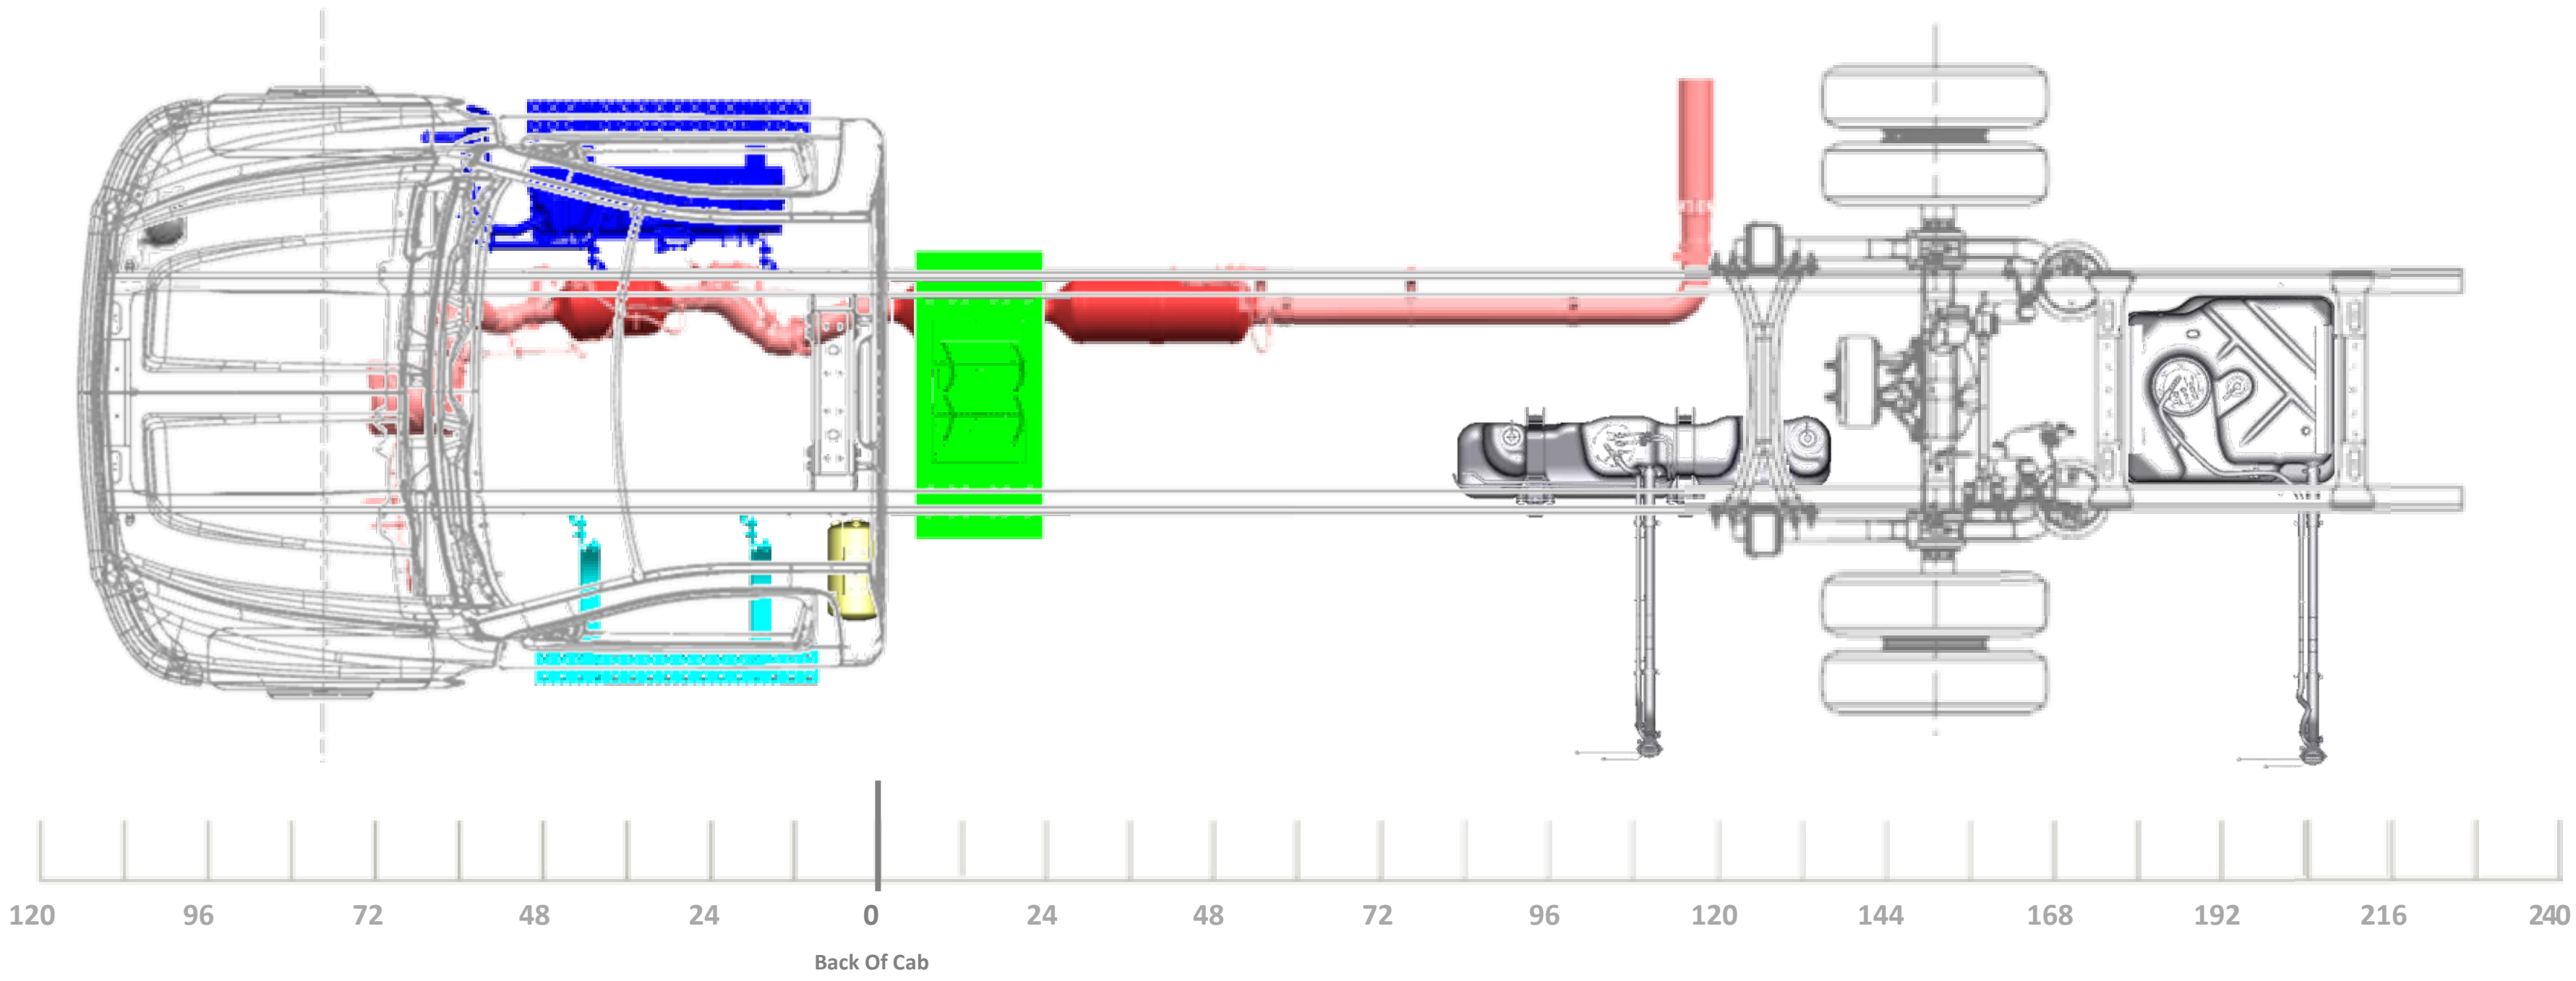
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

Public

REGULAR
CAB 243”
WB

Public

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION VARI-RATE REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

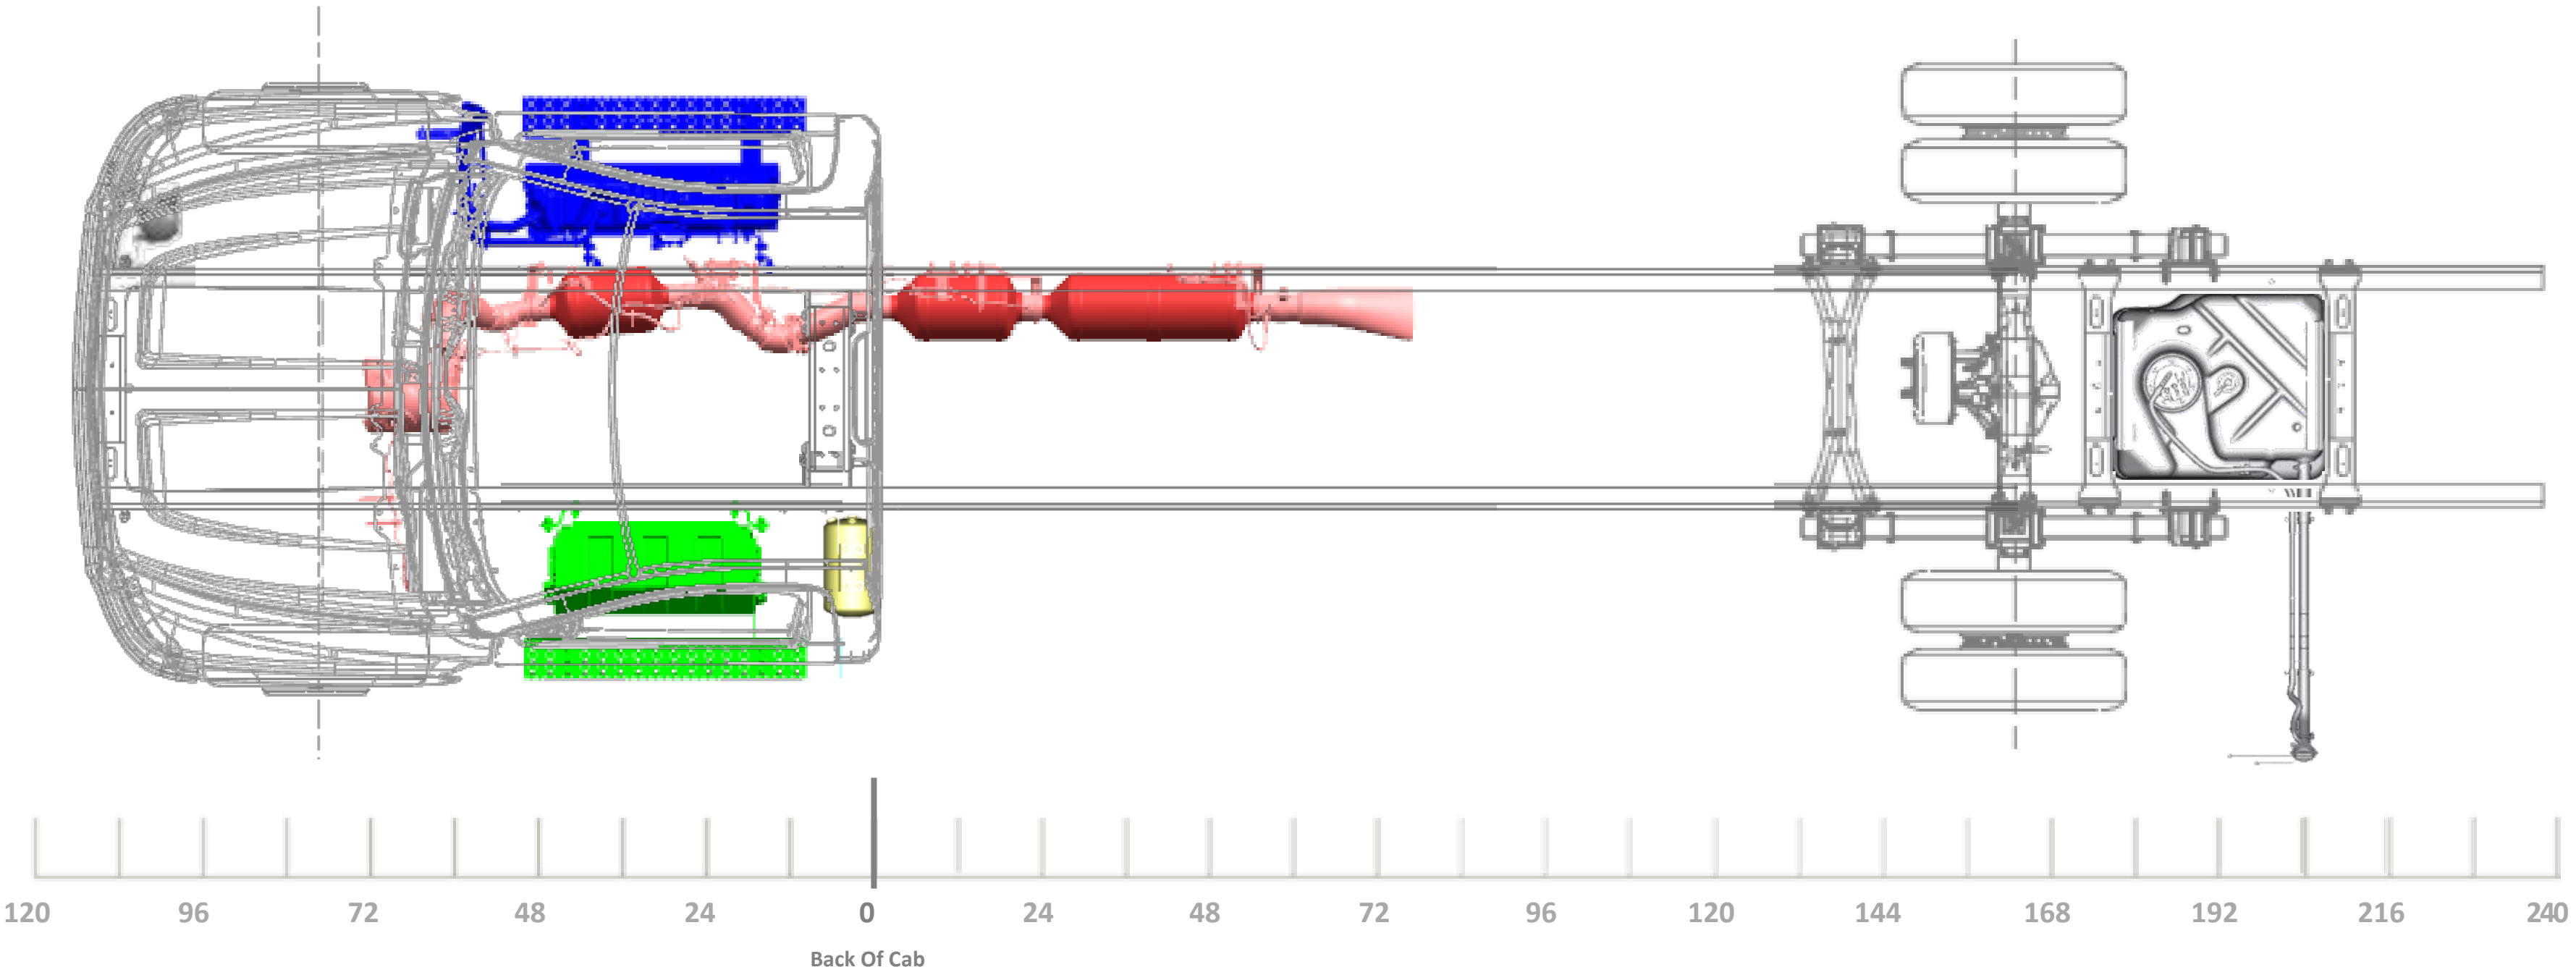
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

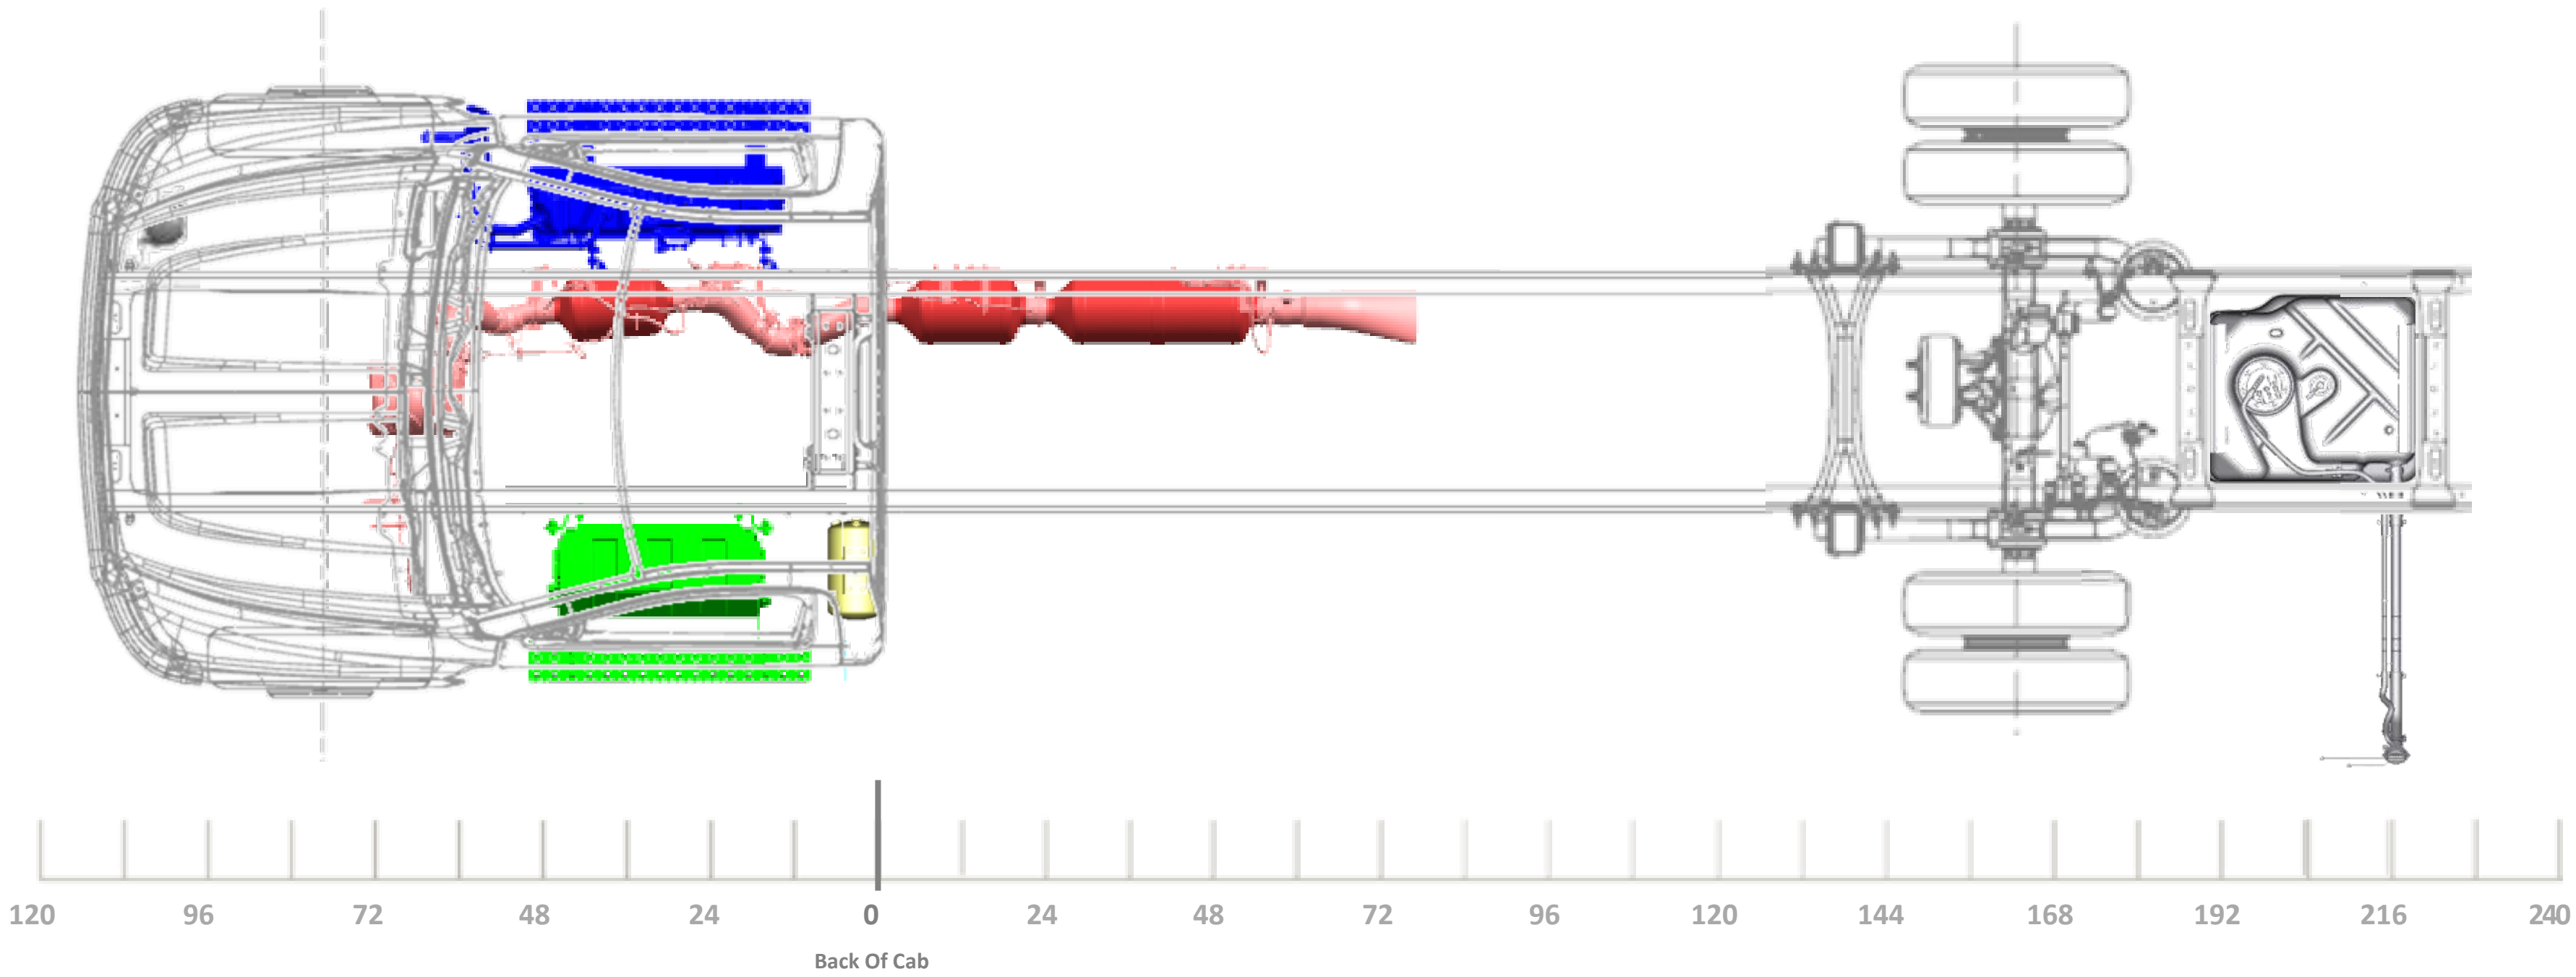
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

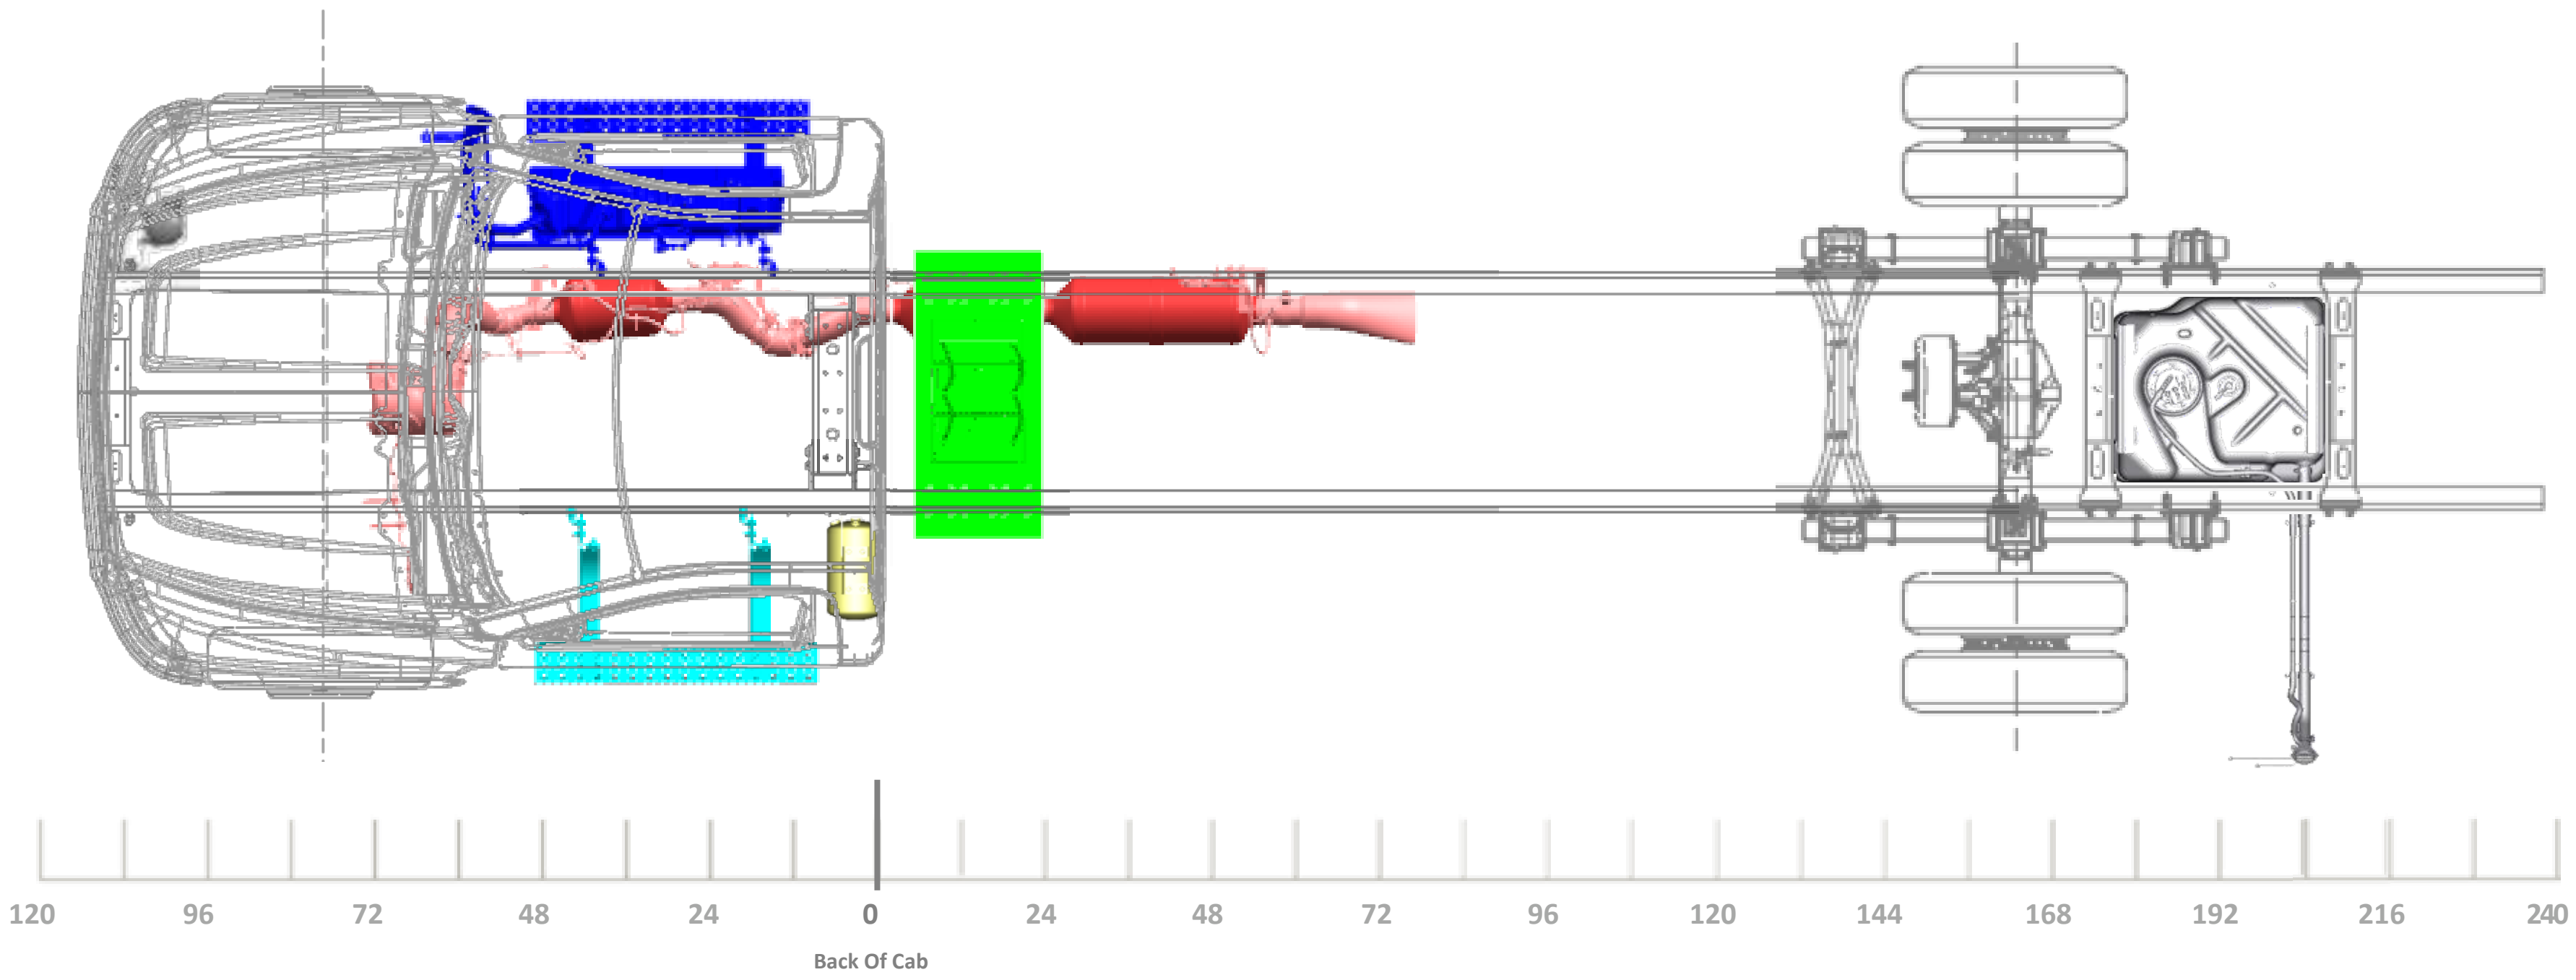
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

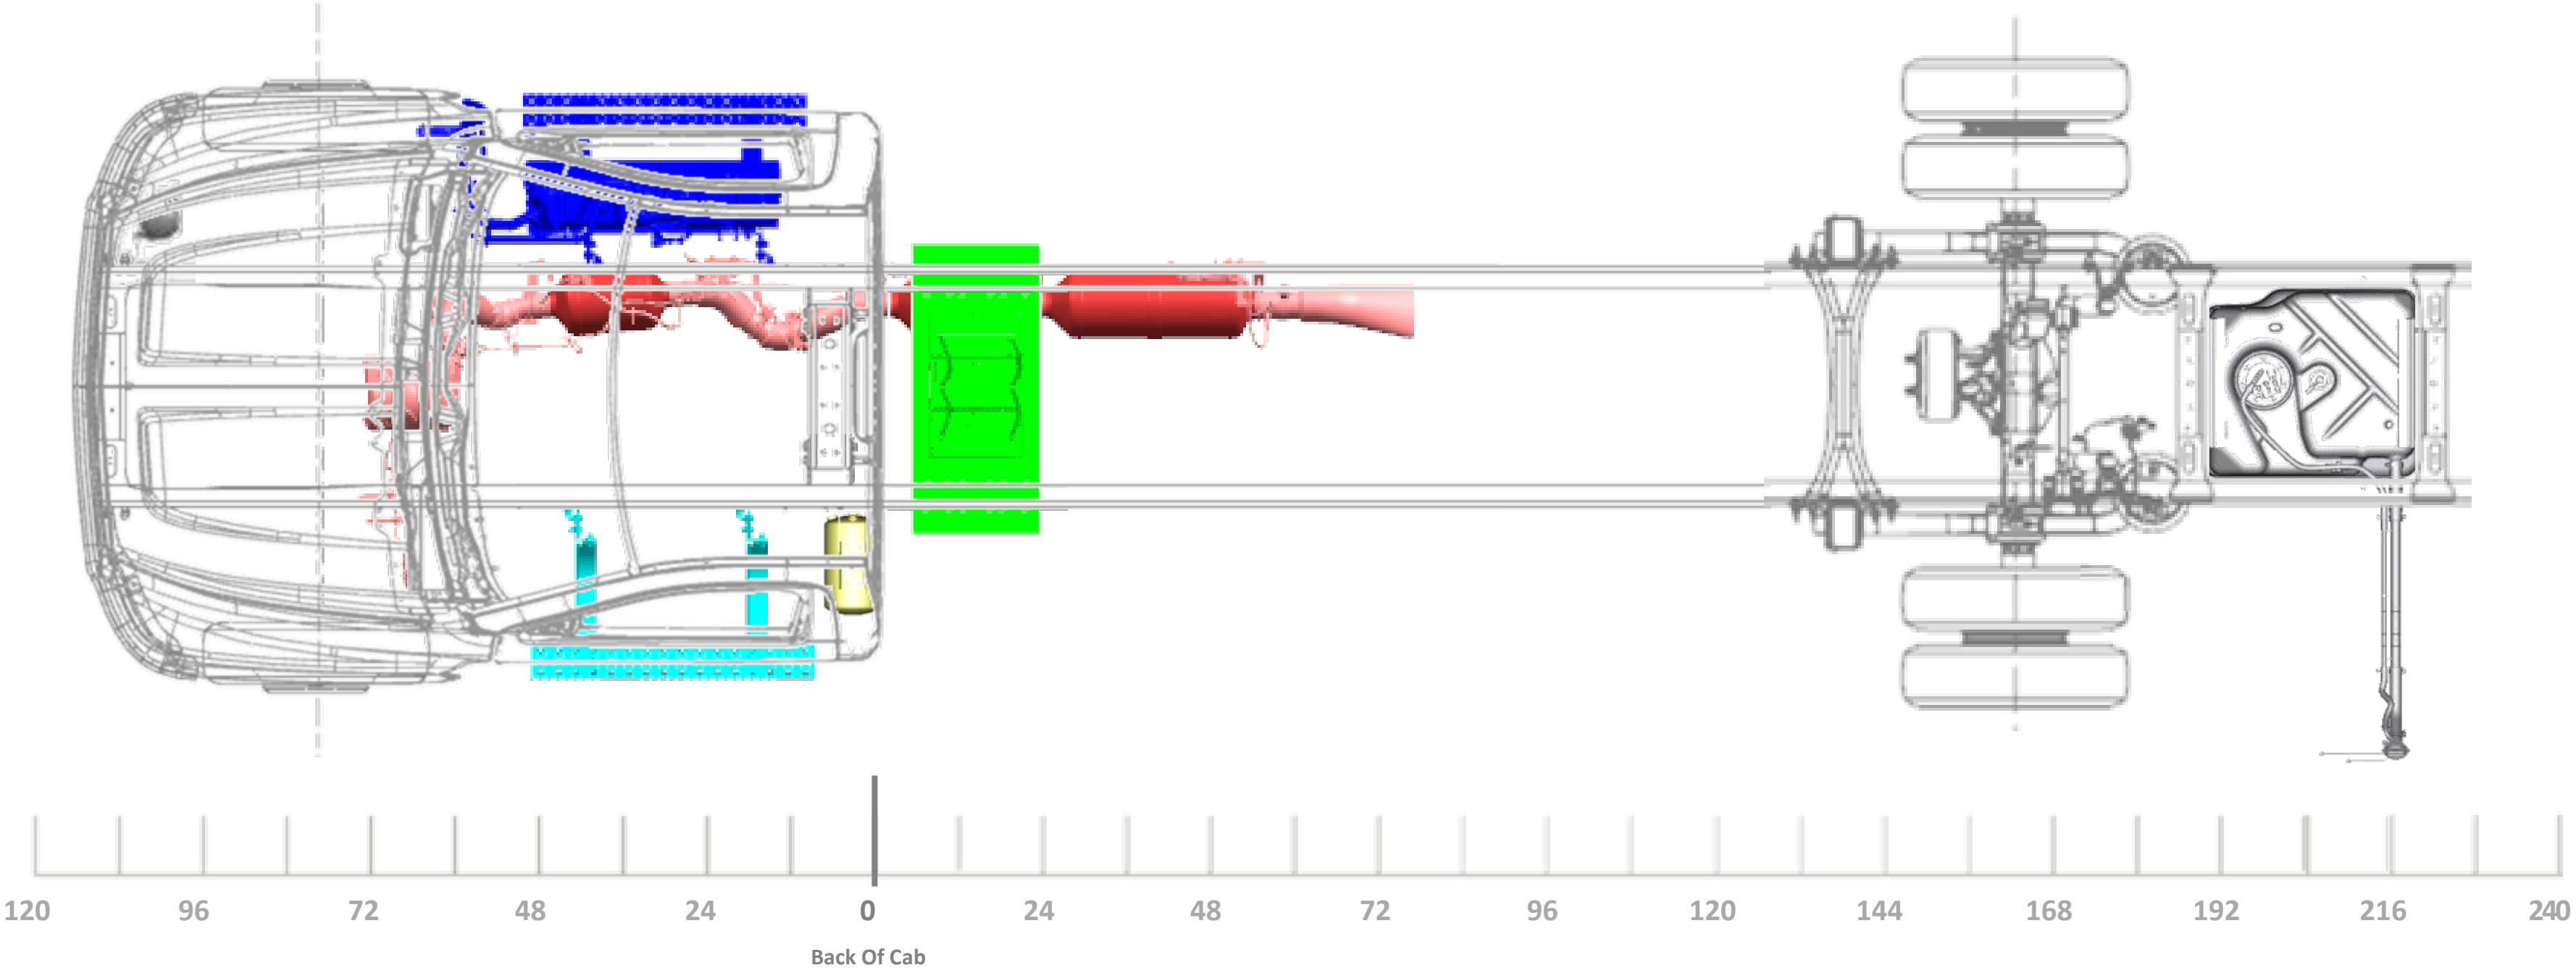
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

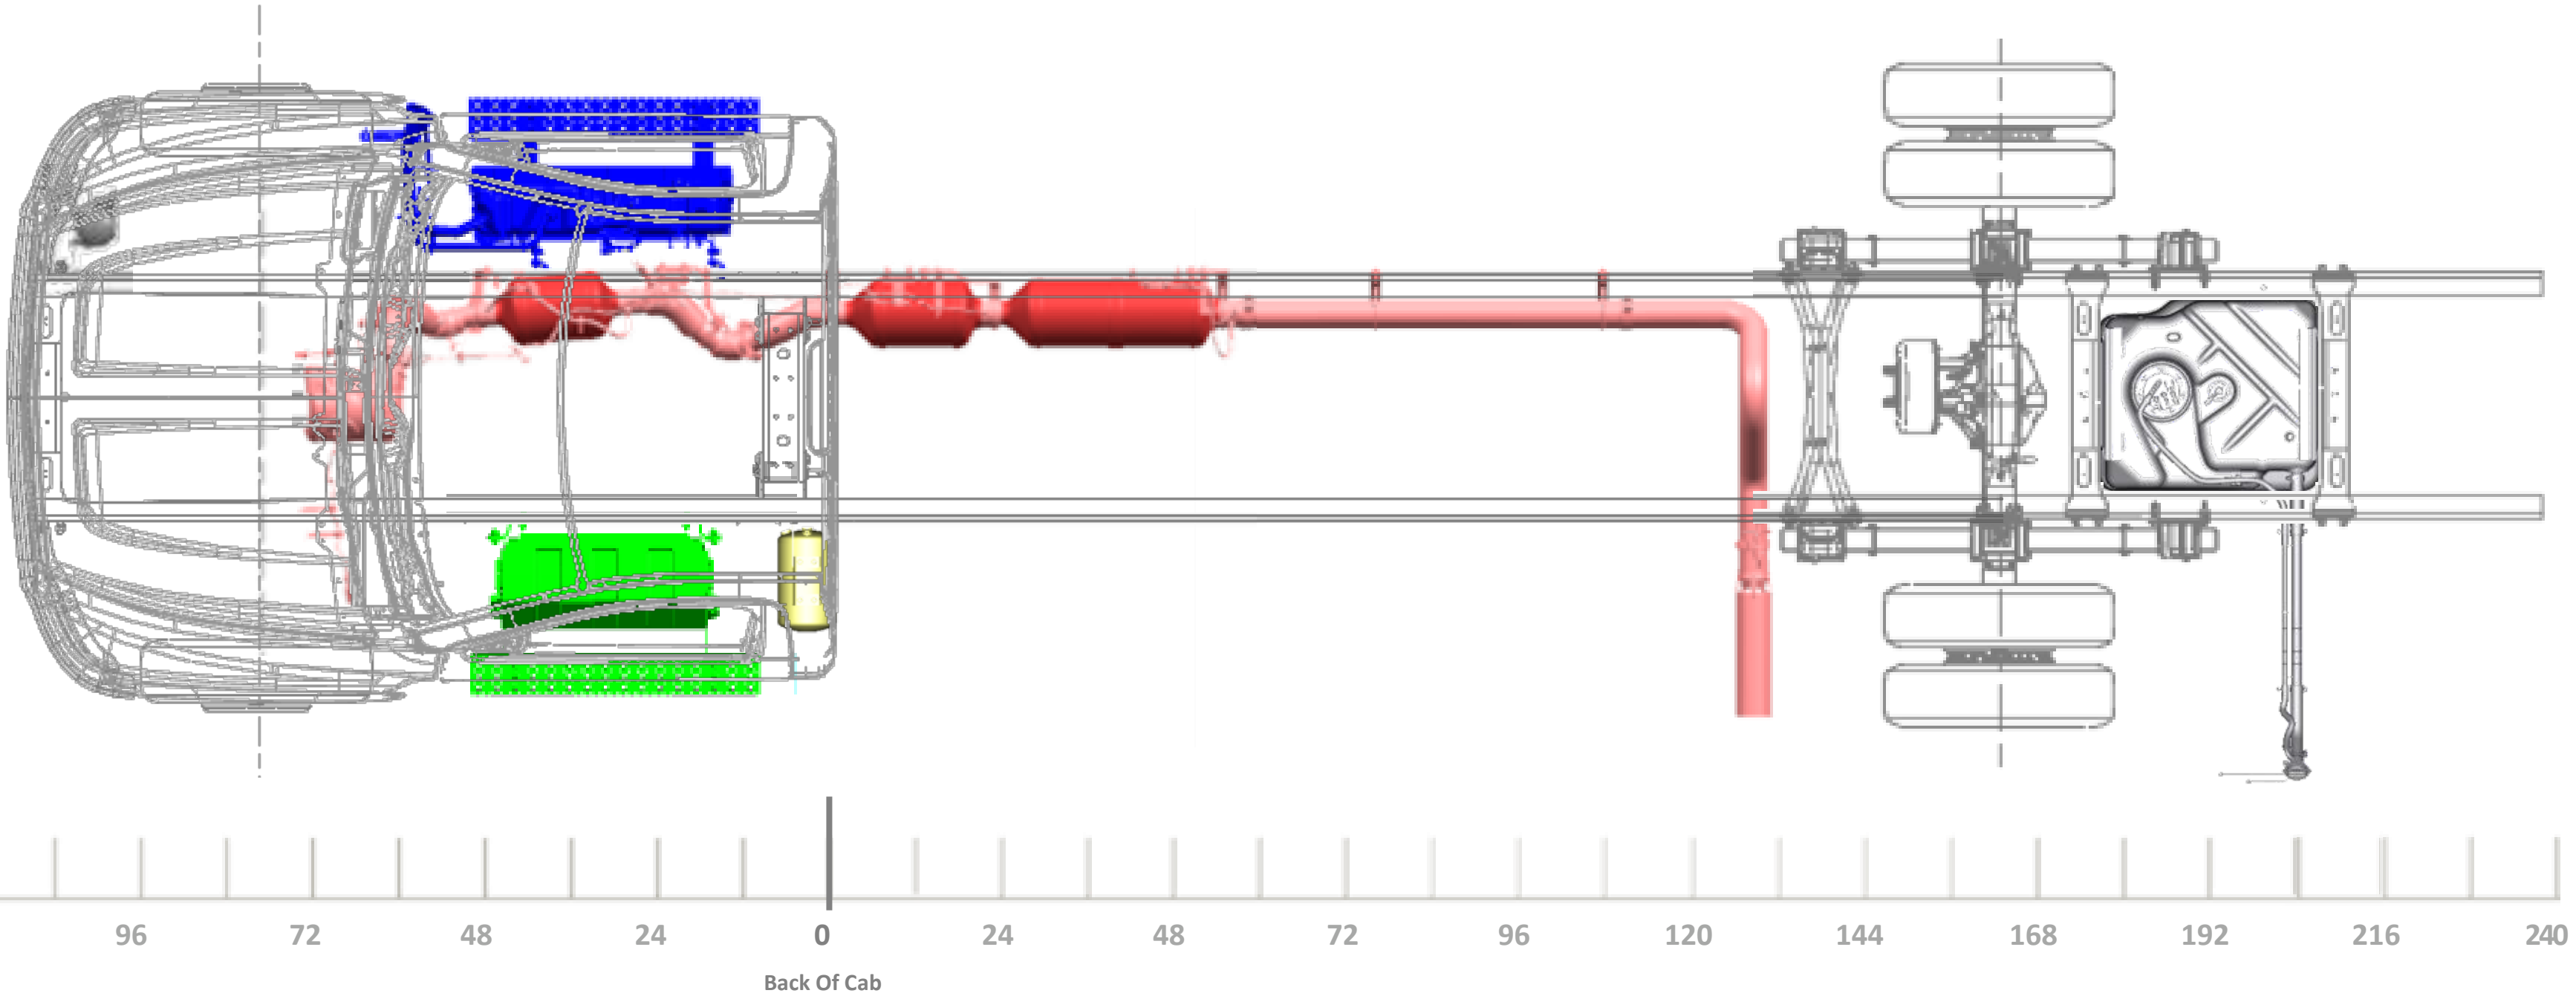
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

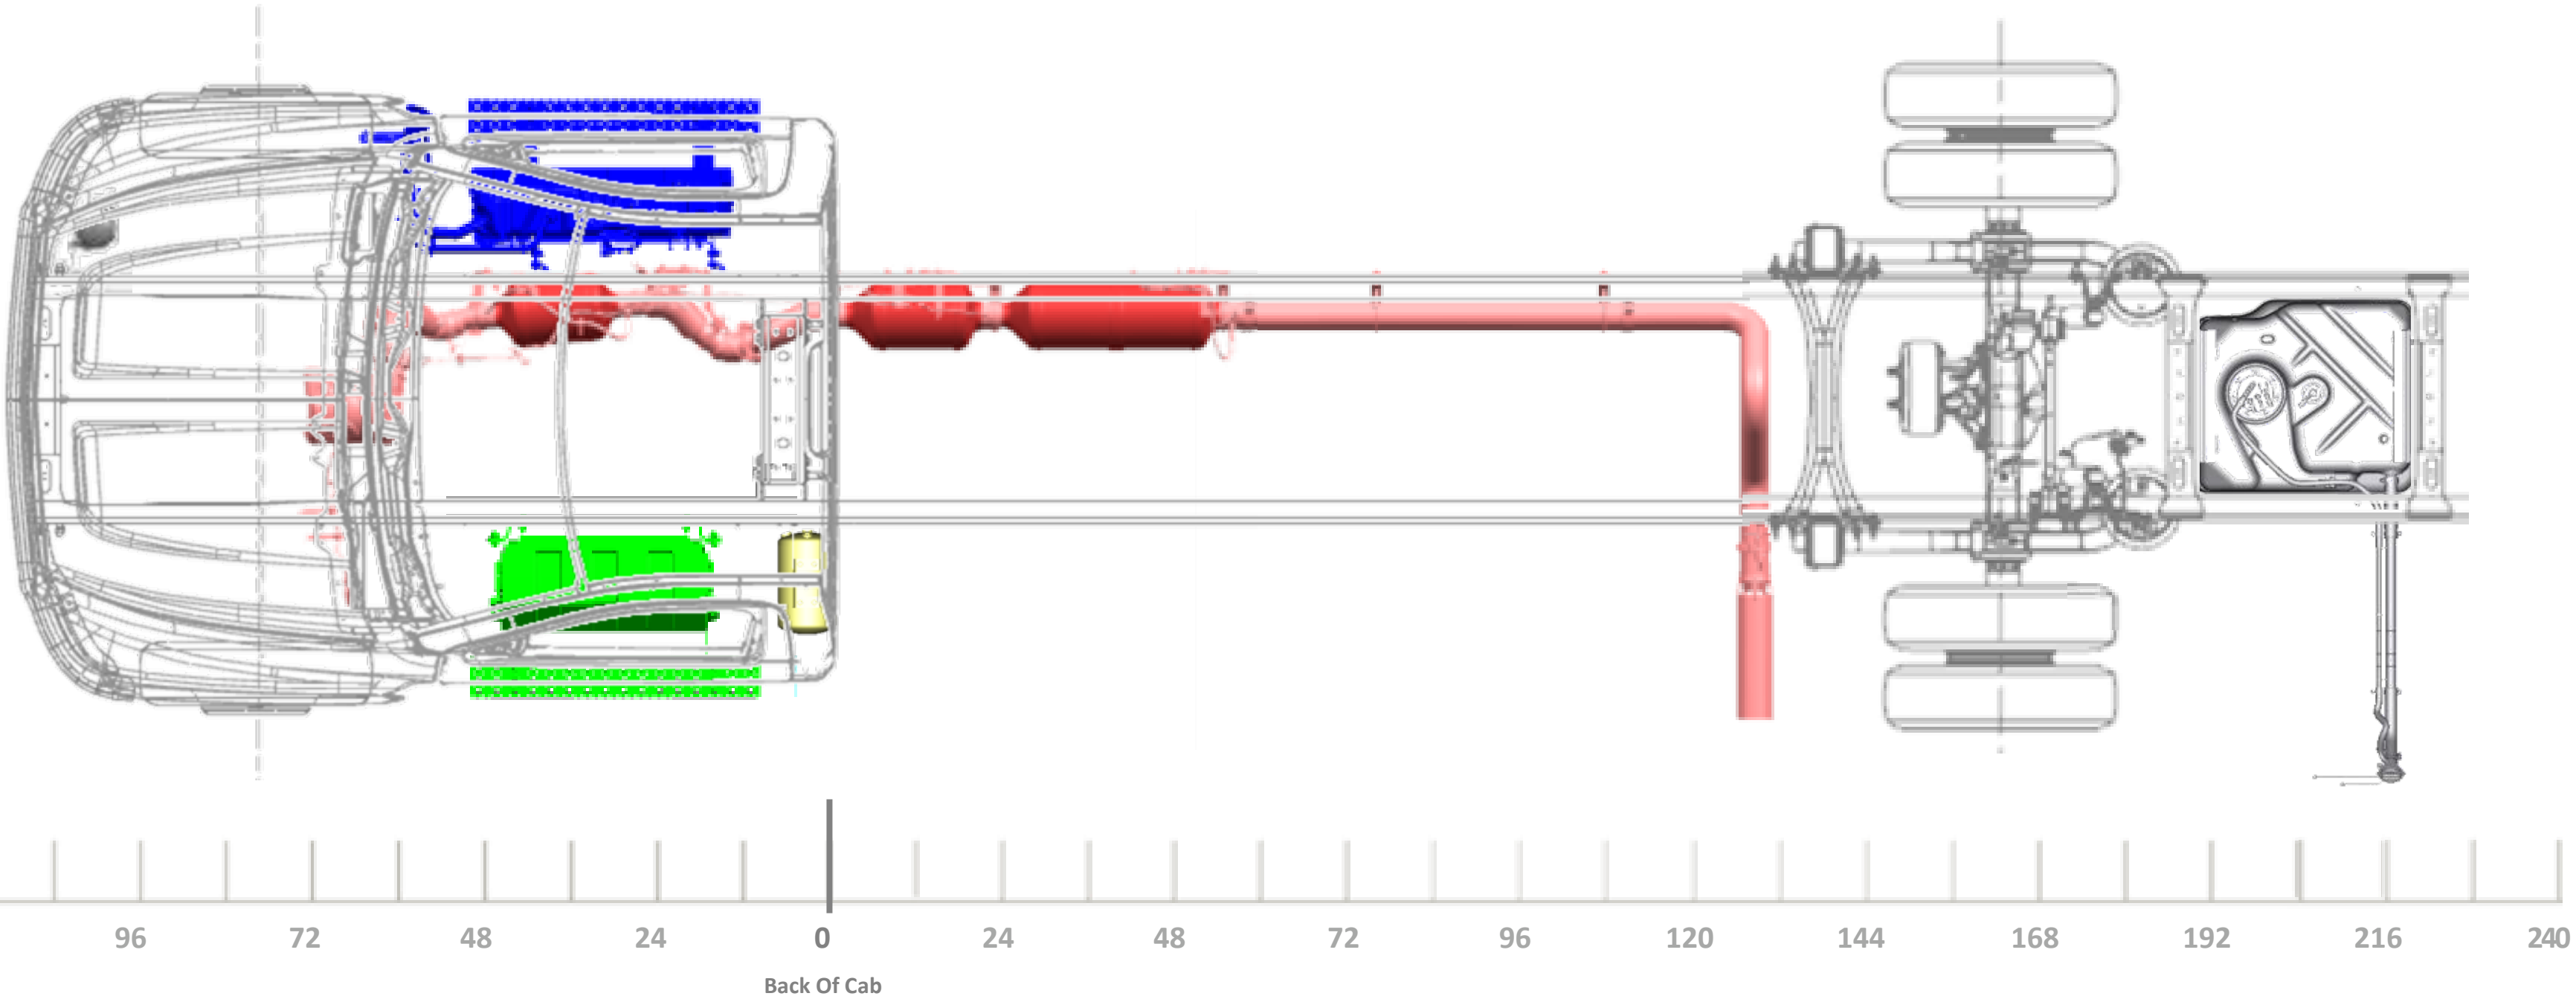
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

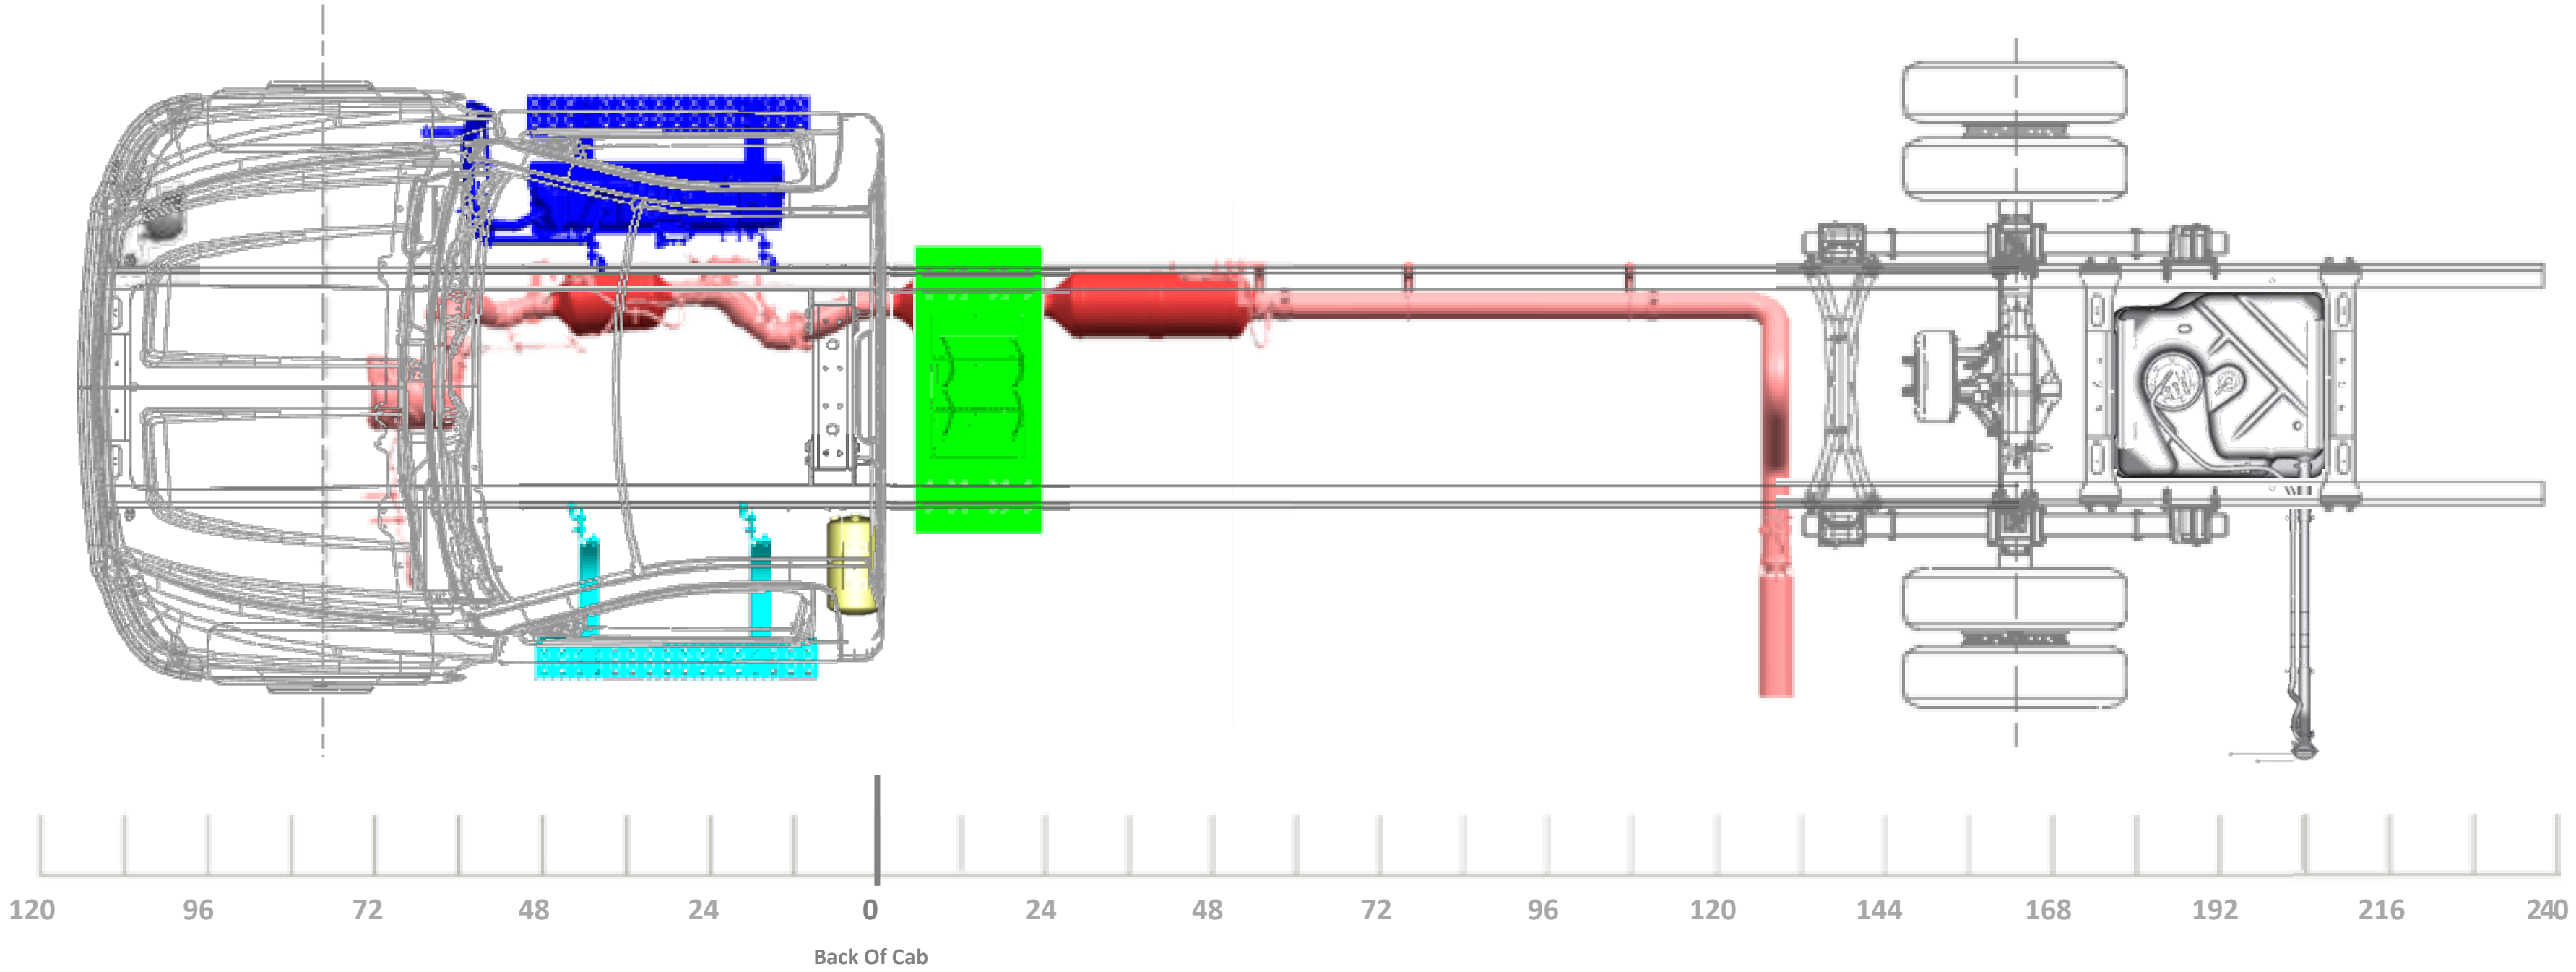
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

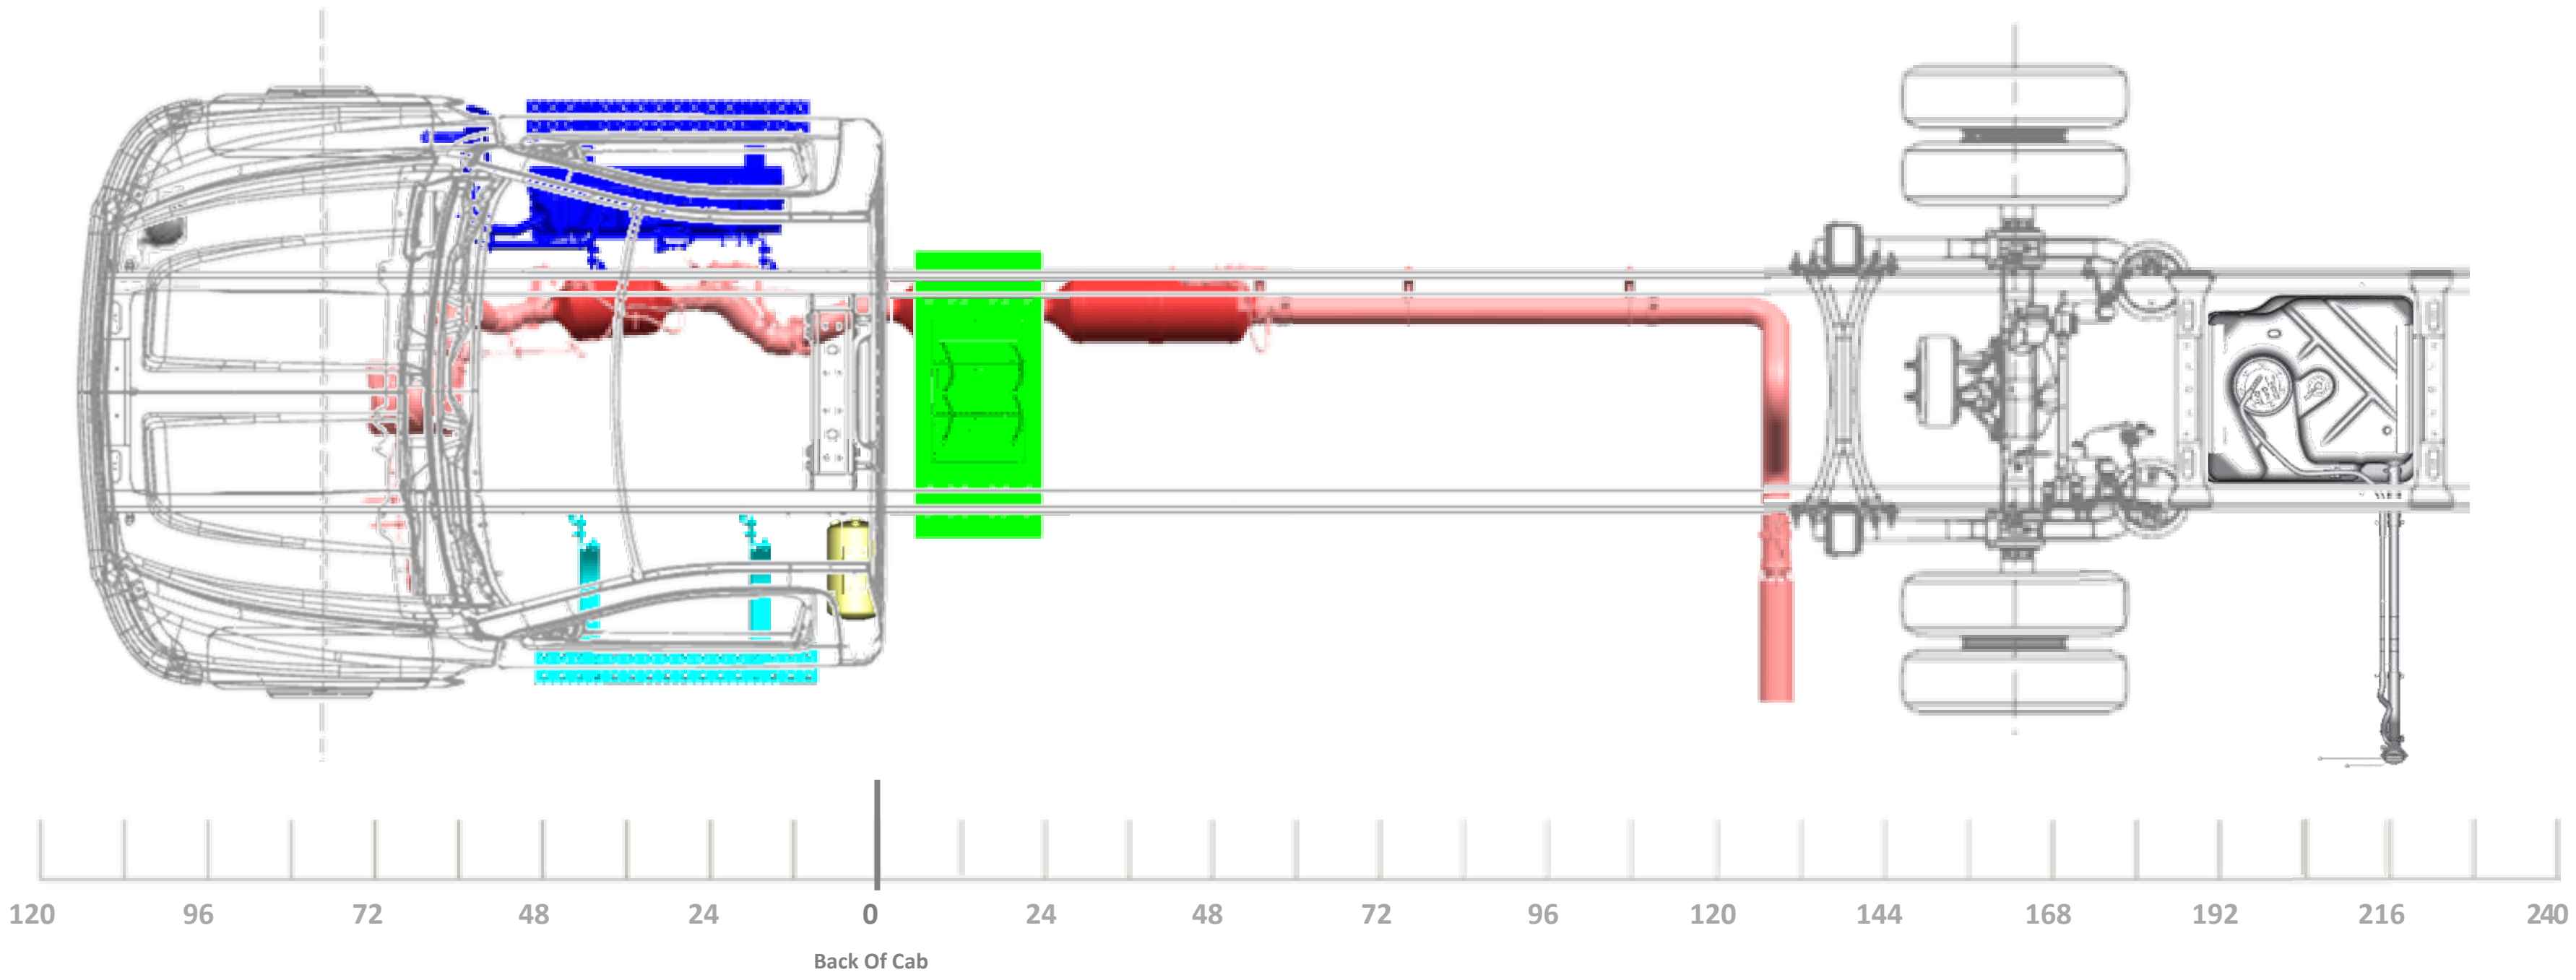
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

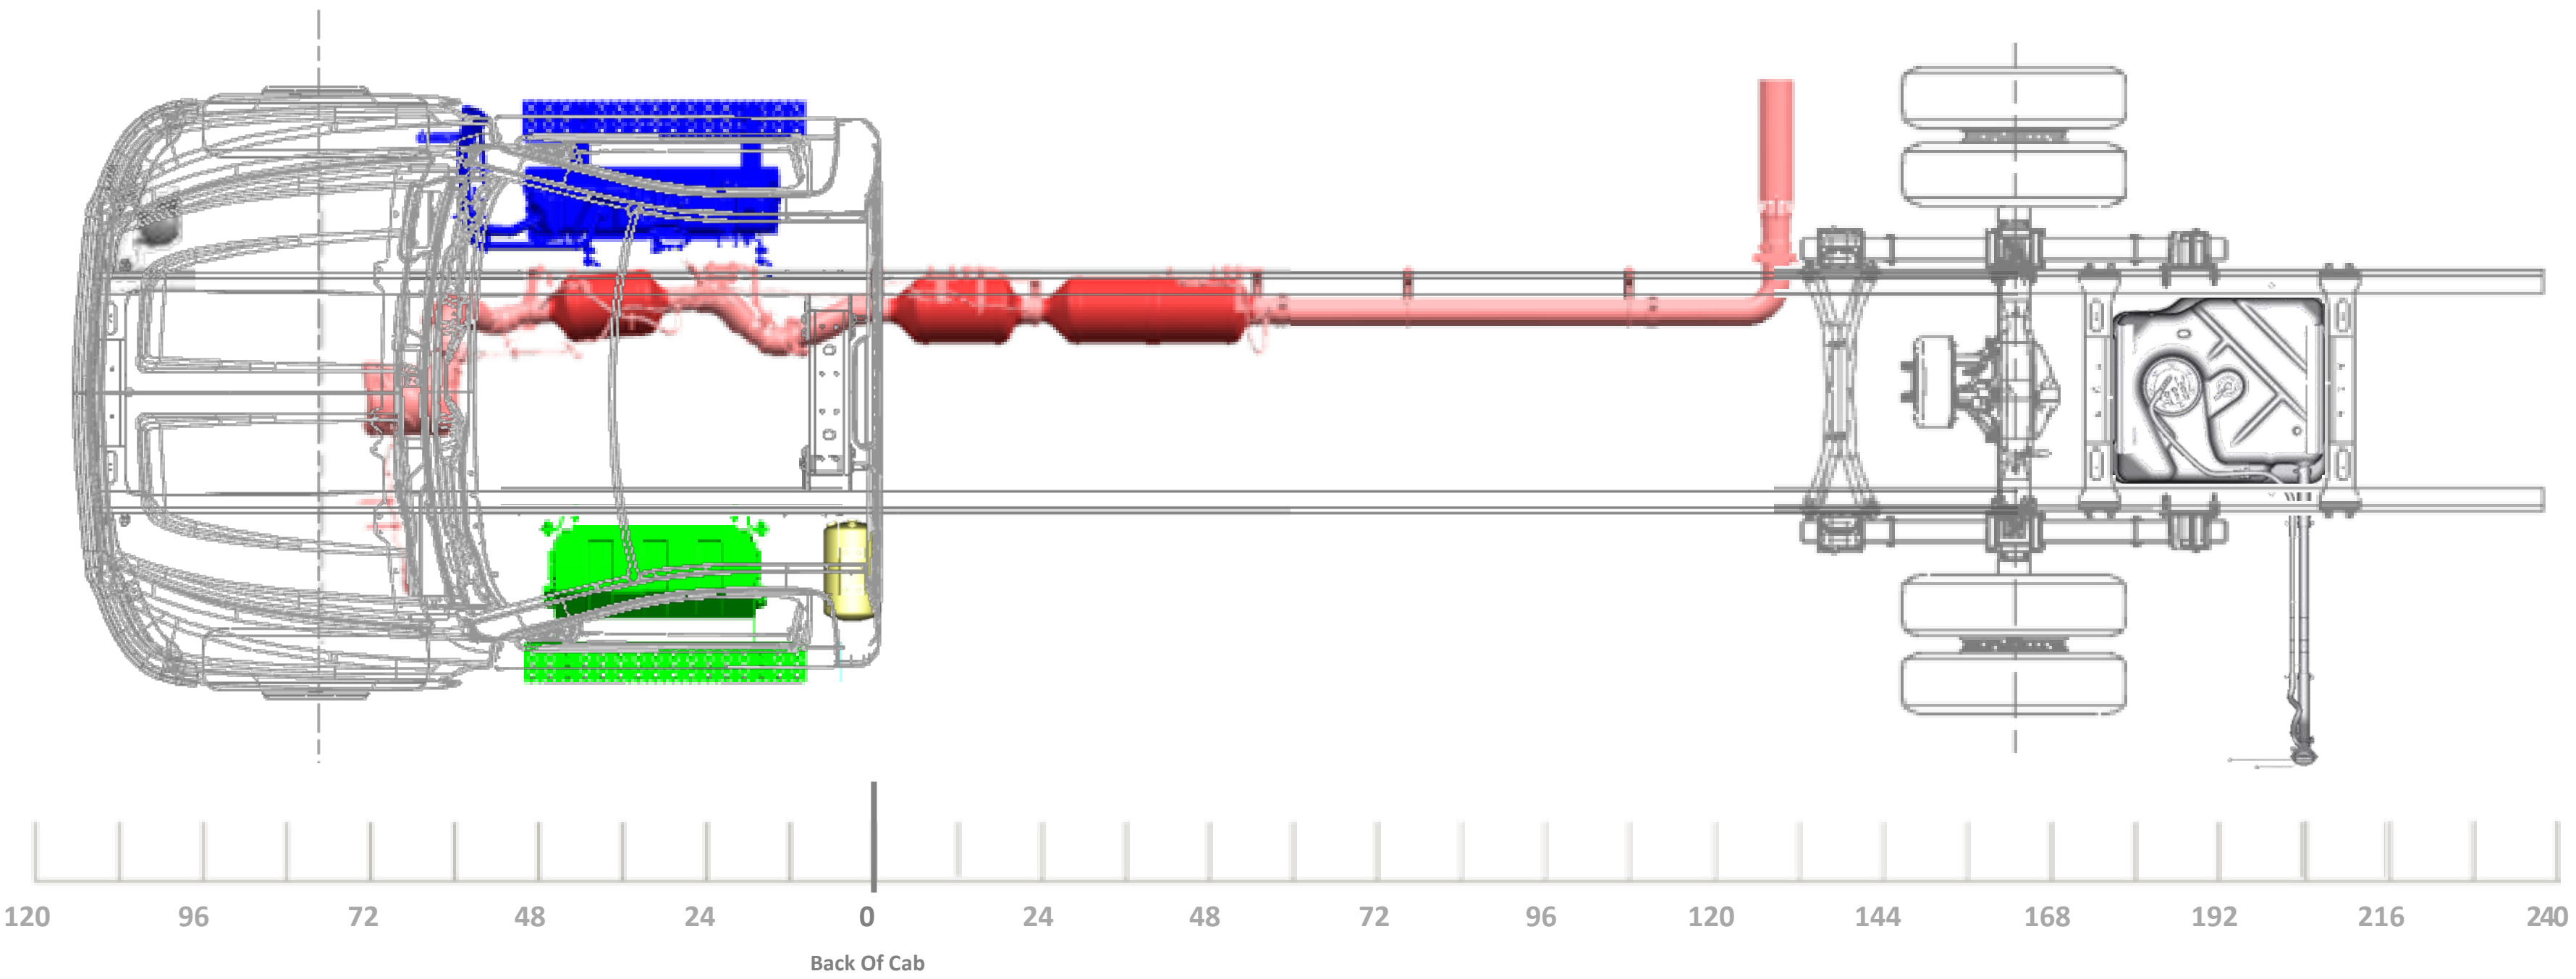
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

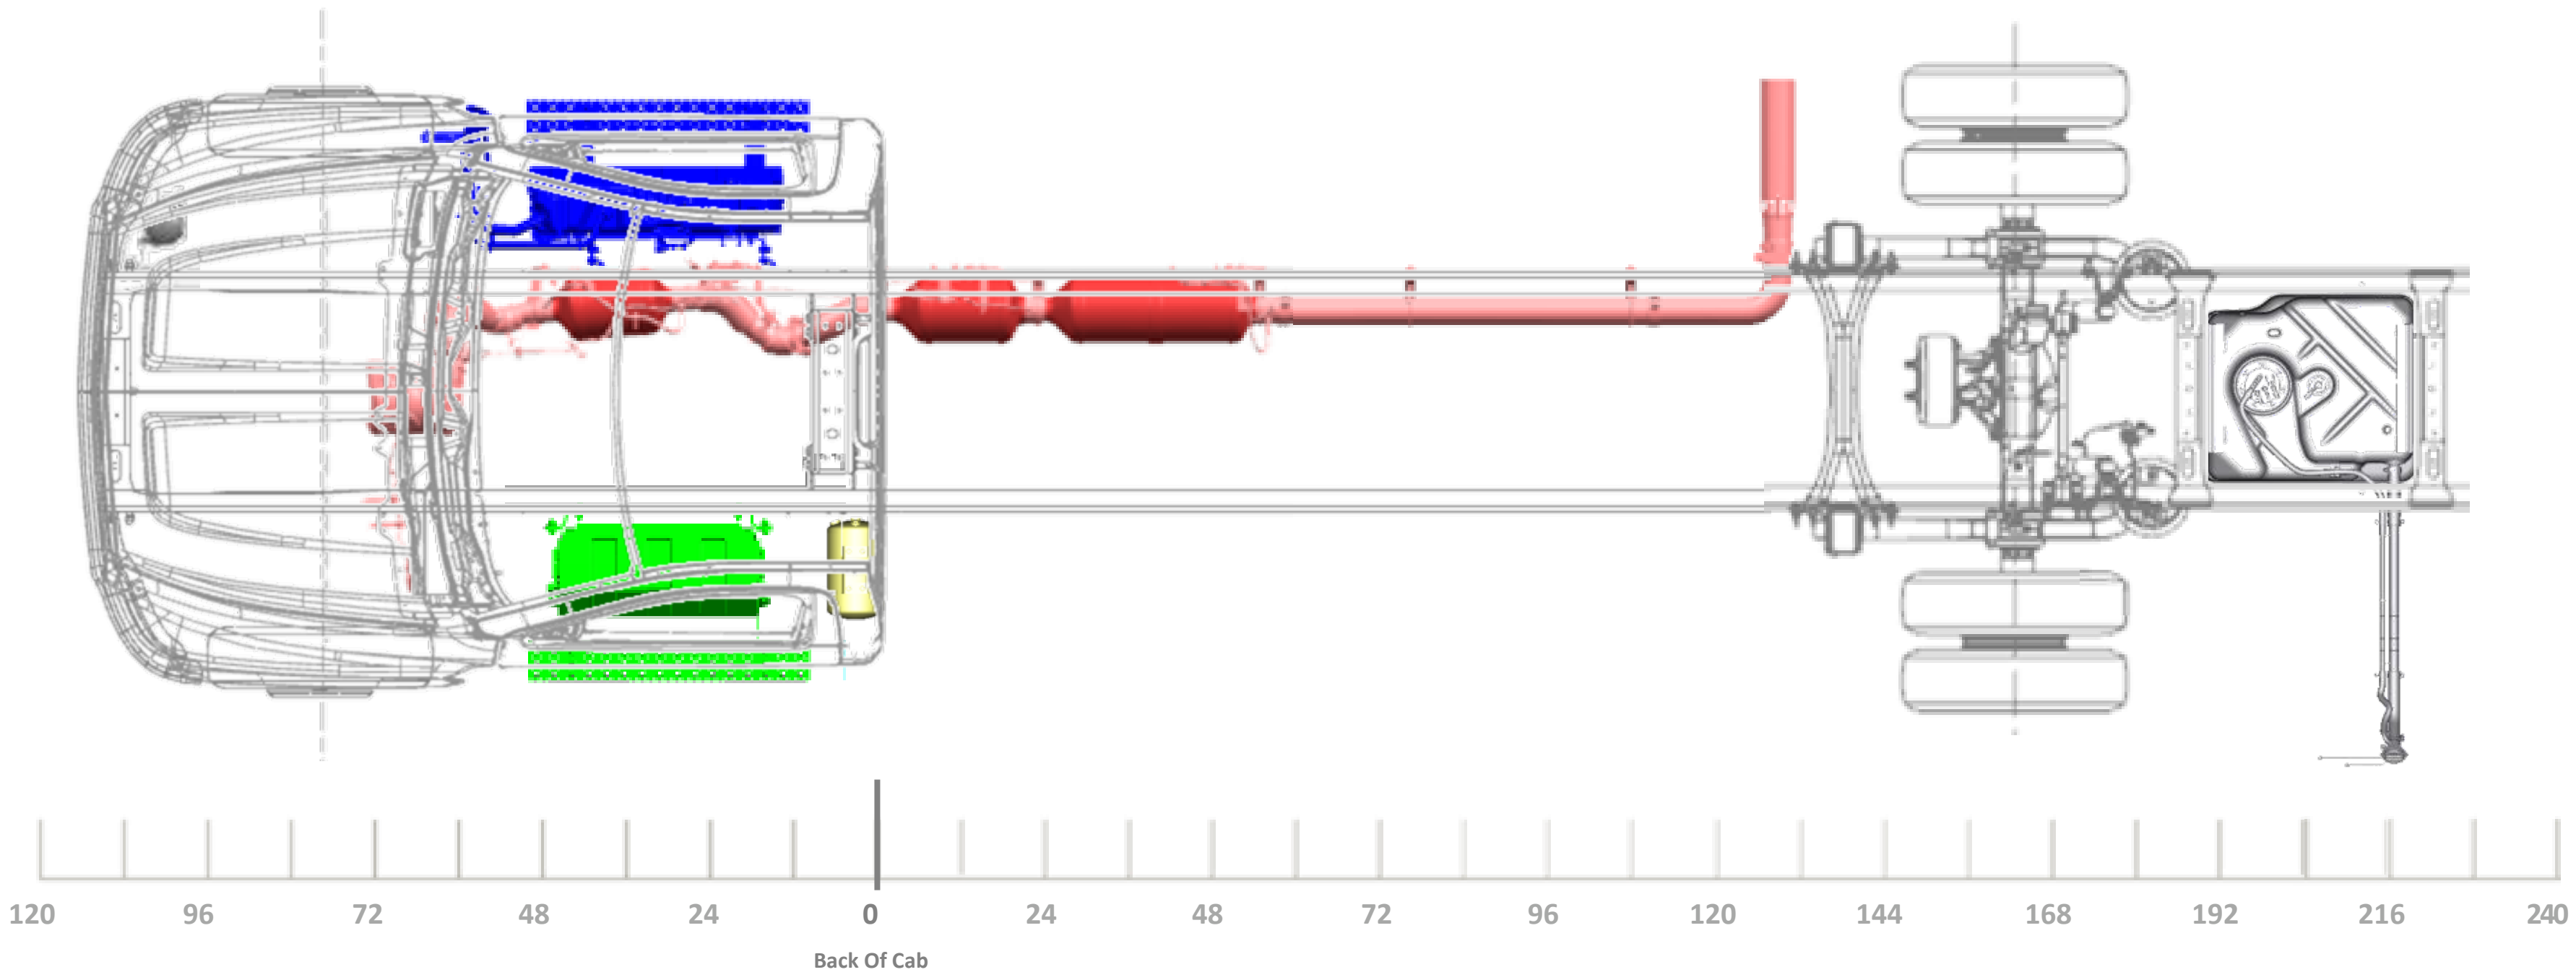
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

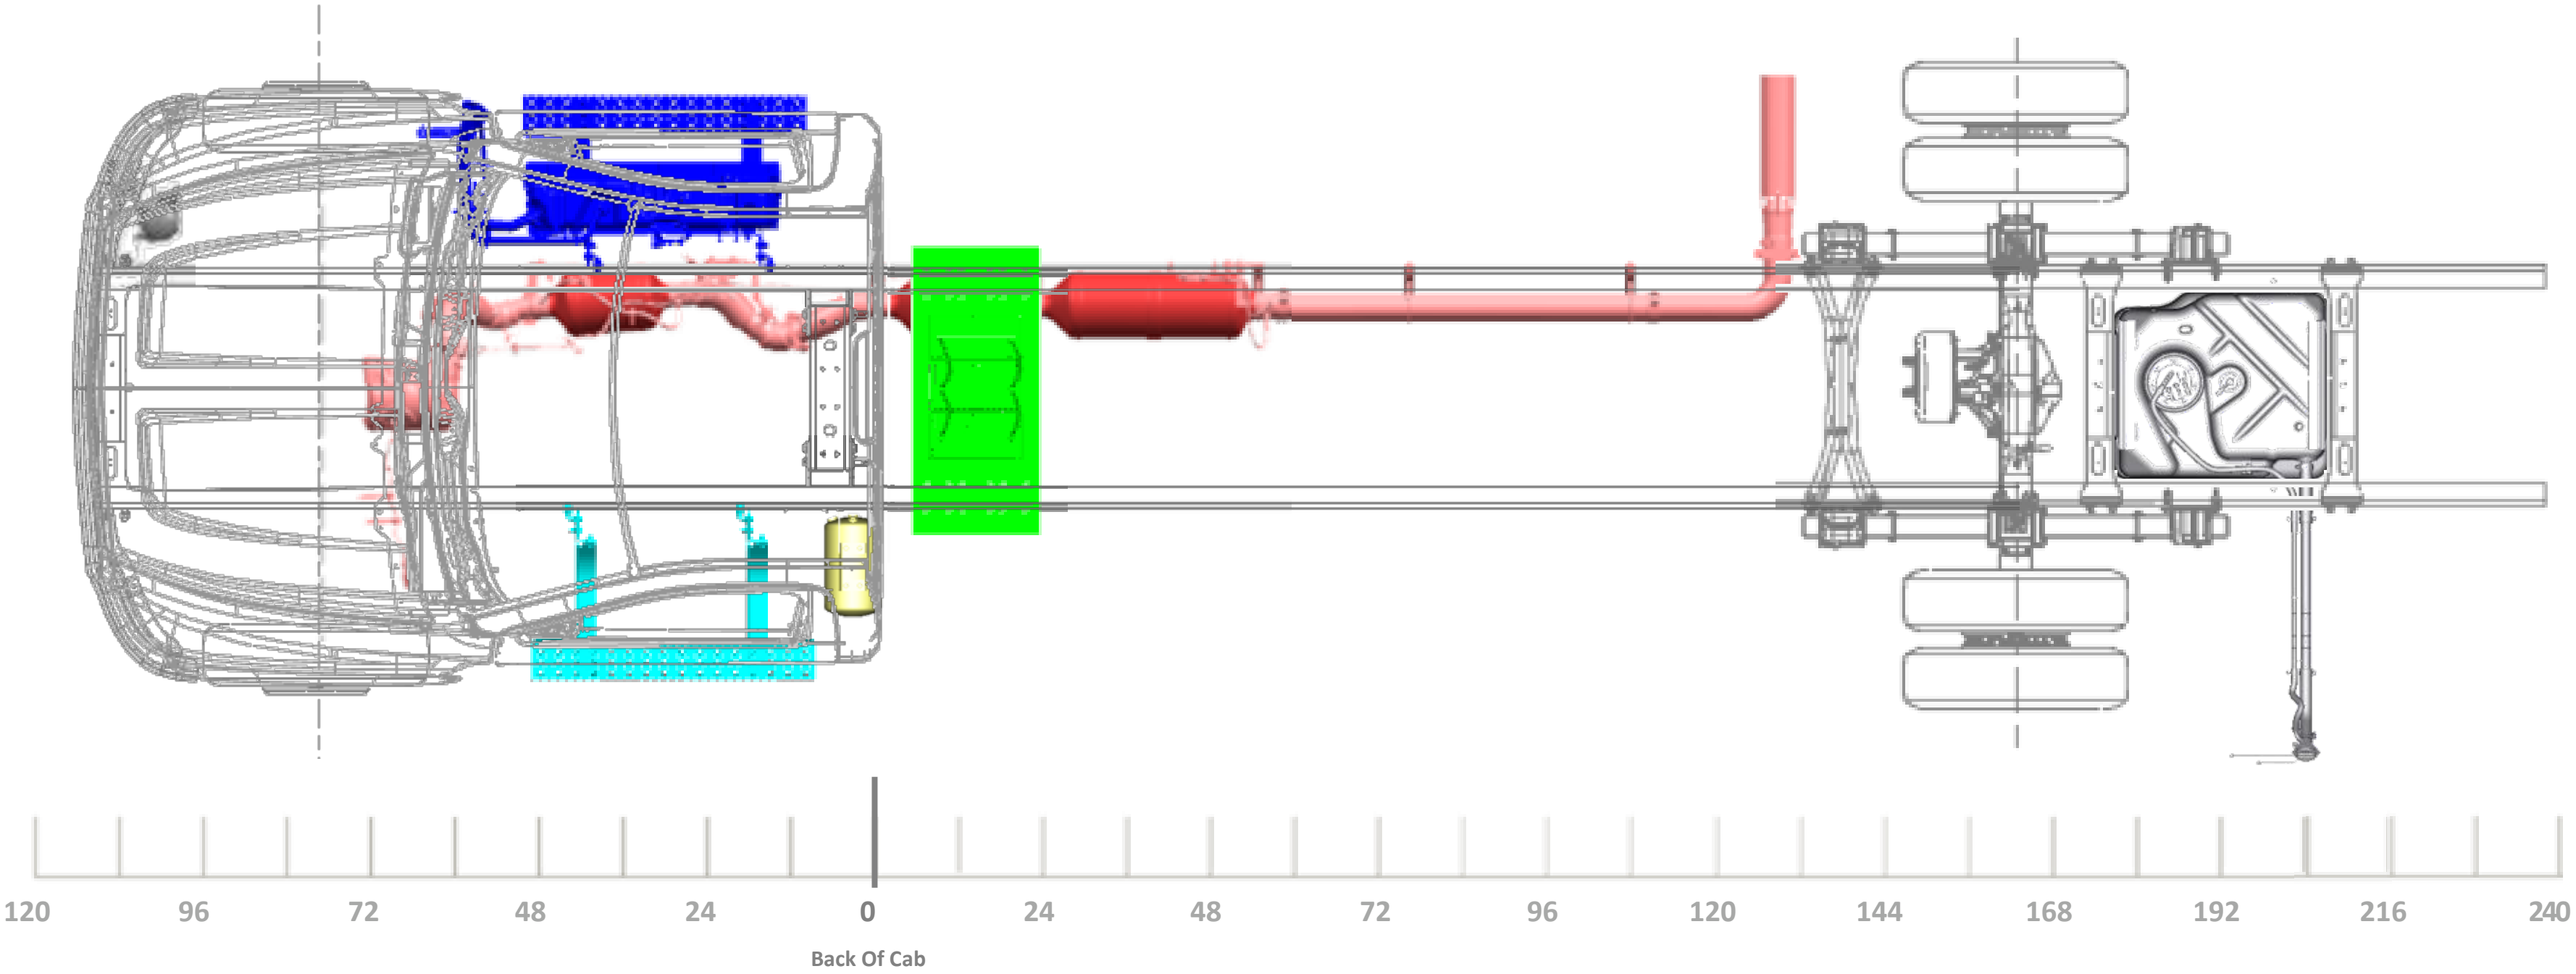
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

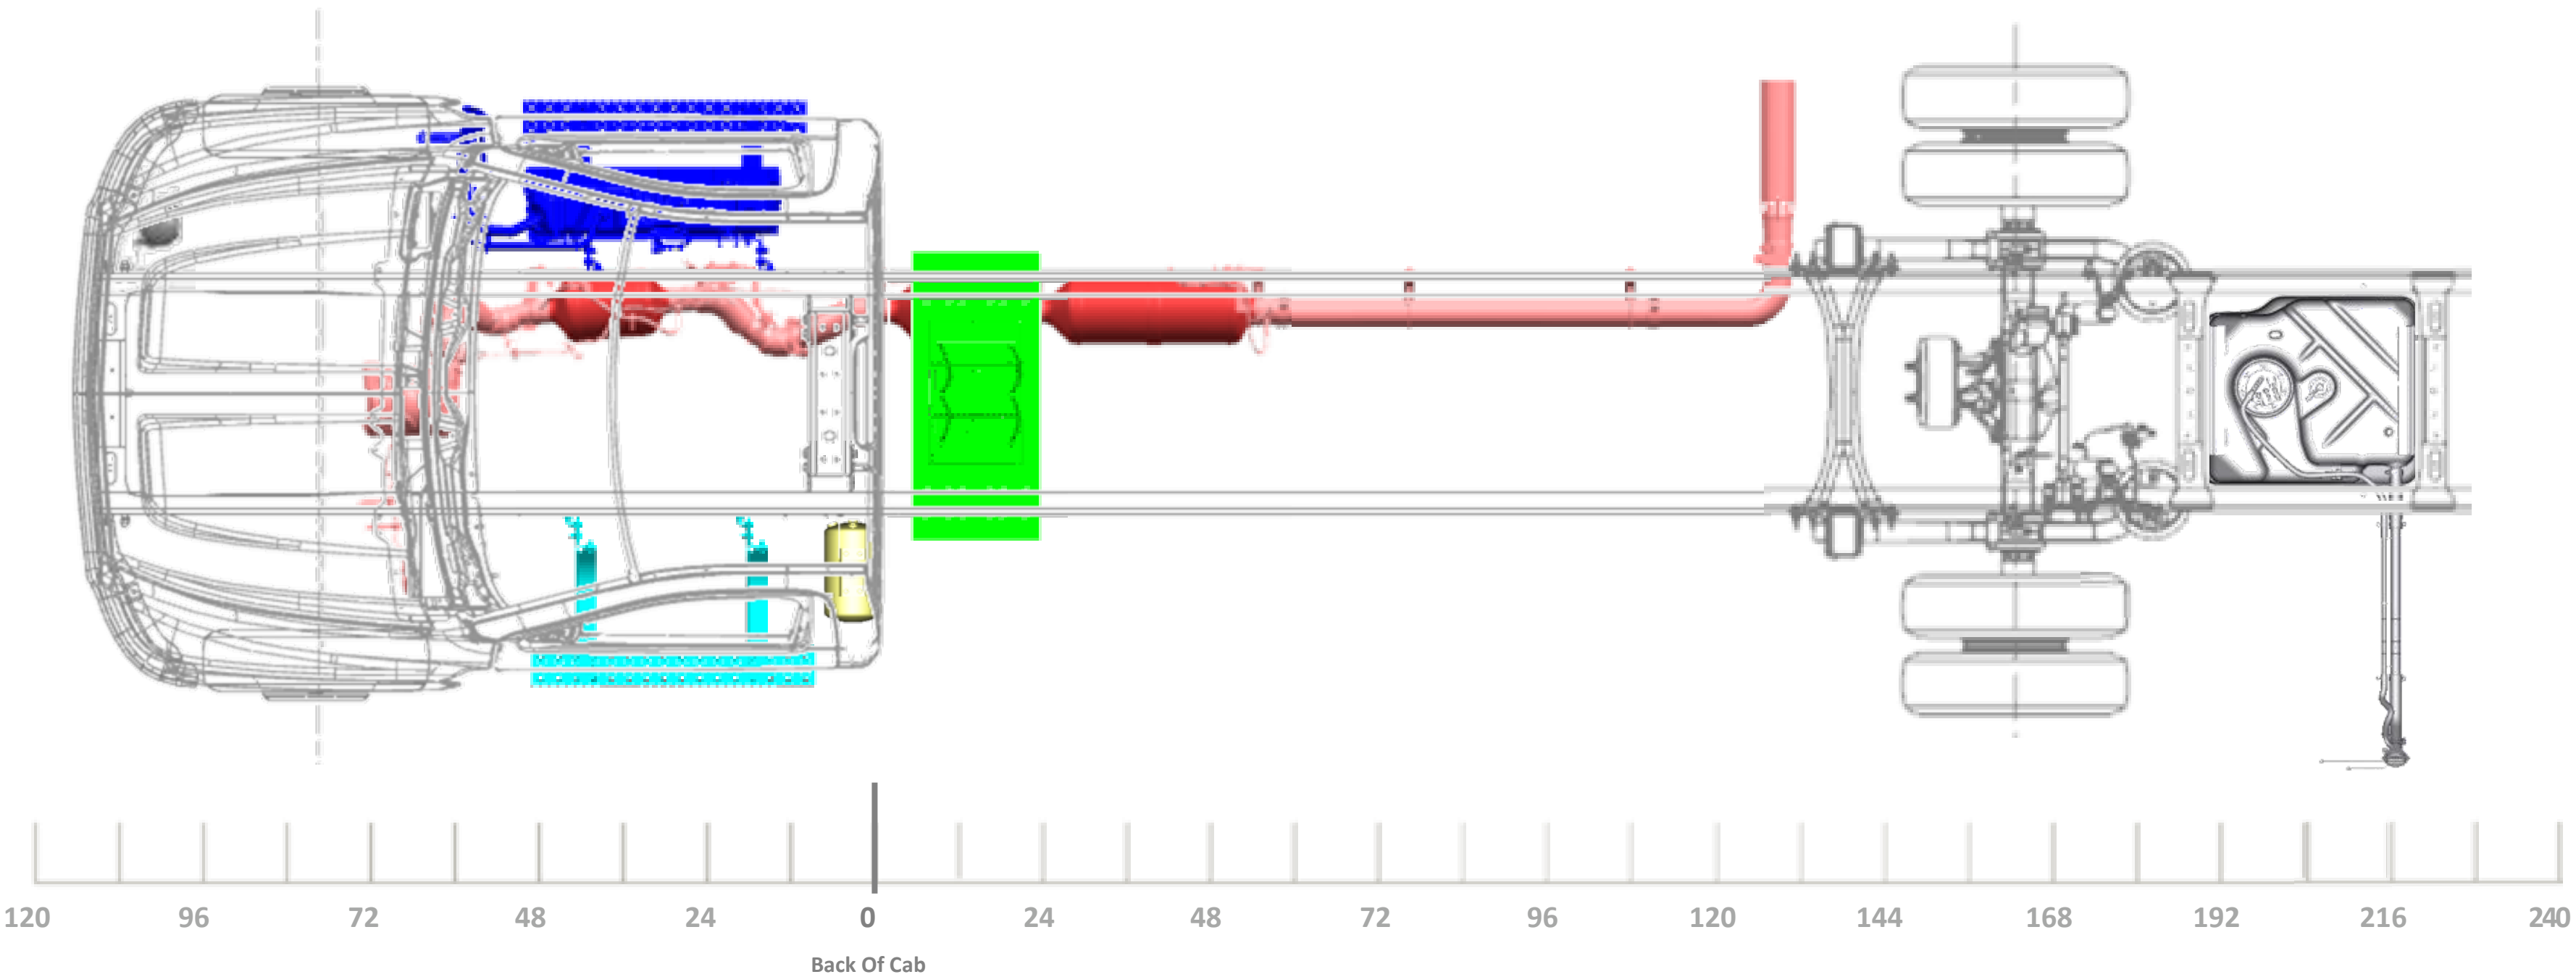
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

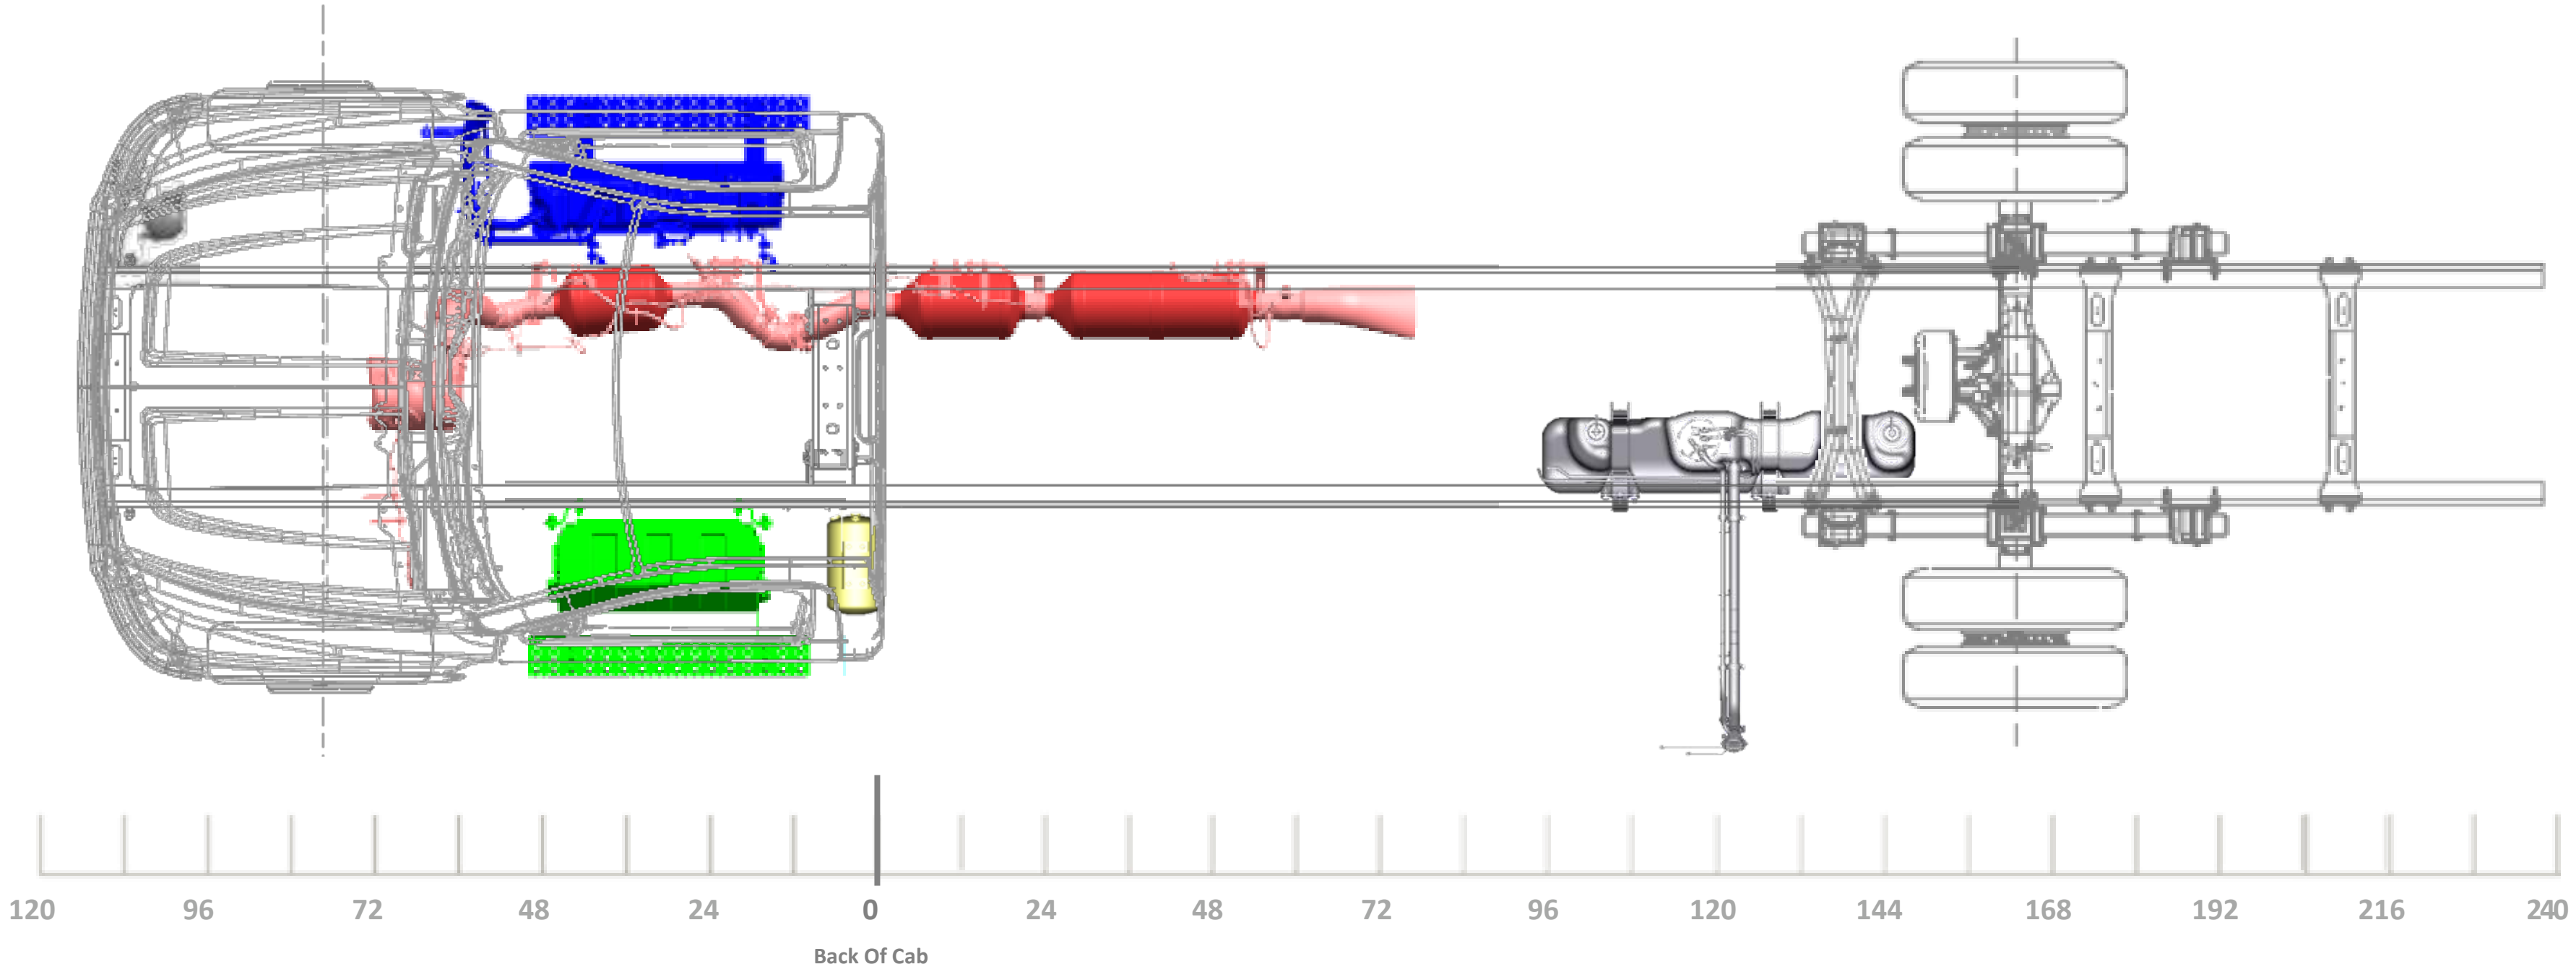
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

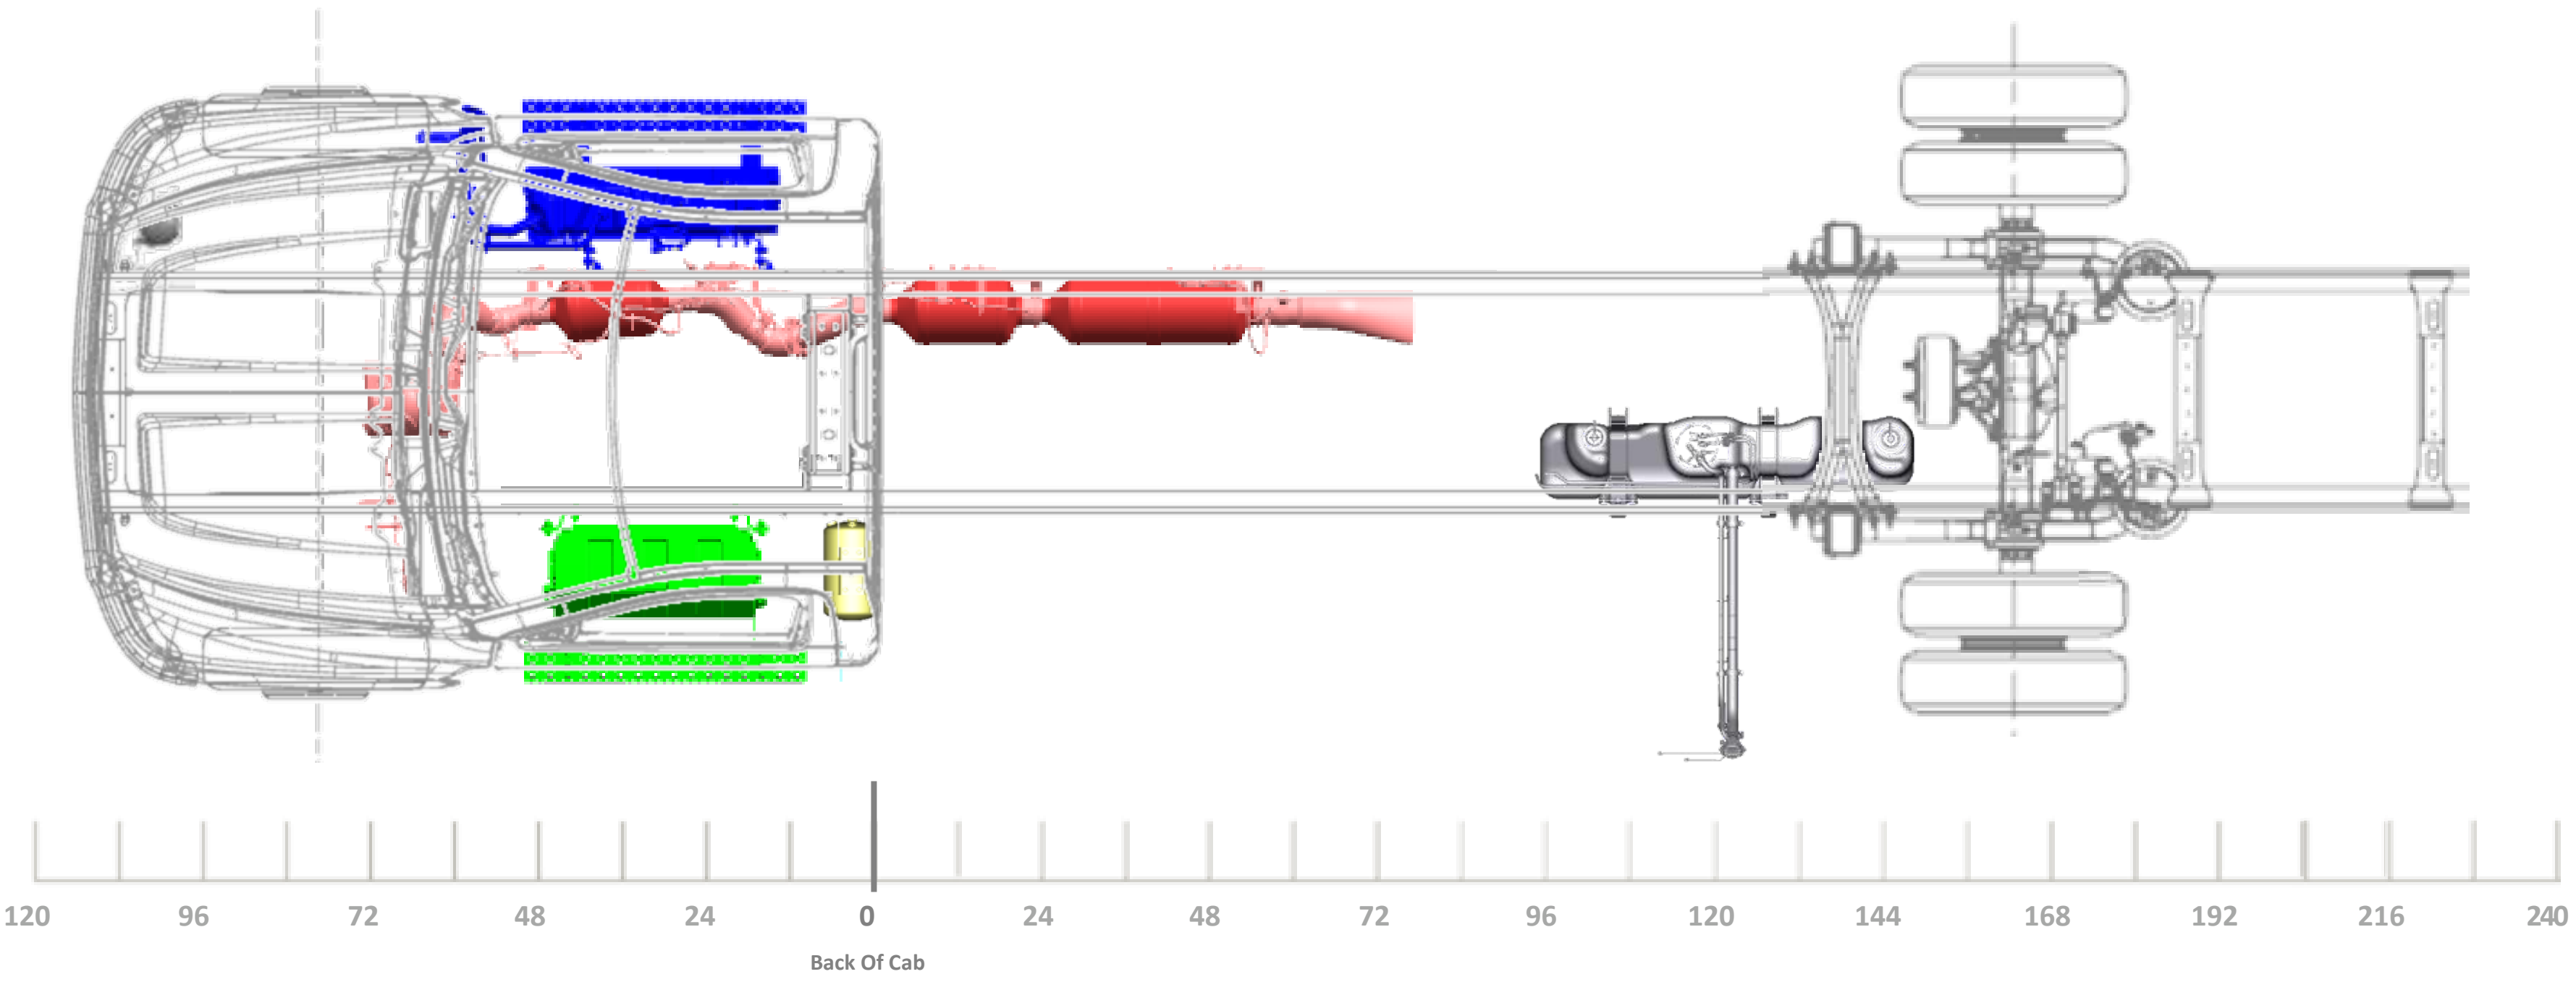
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

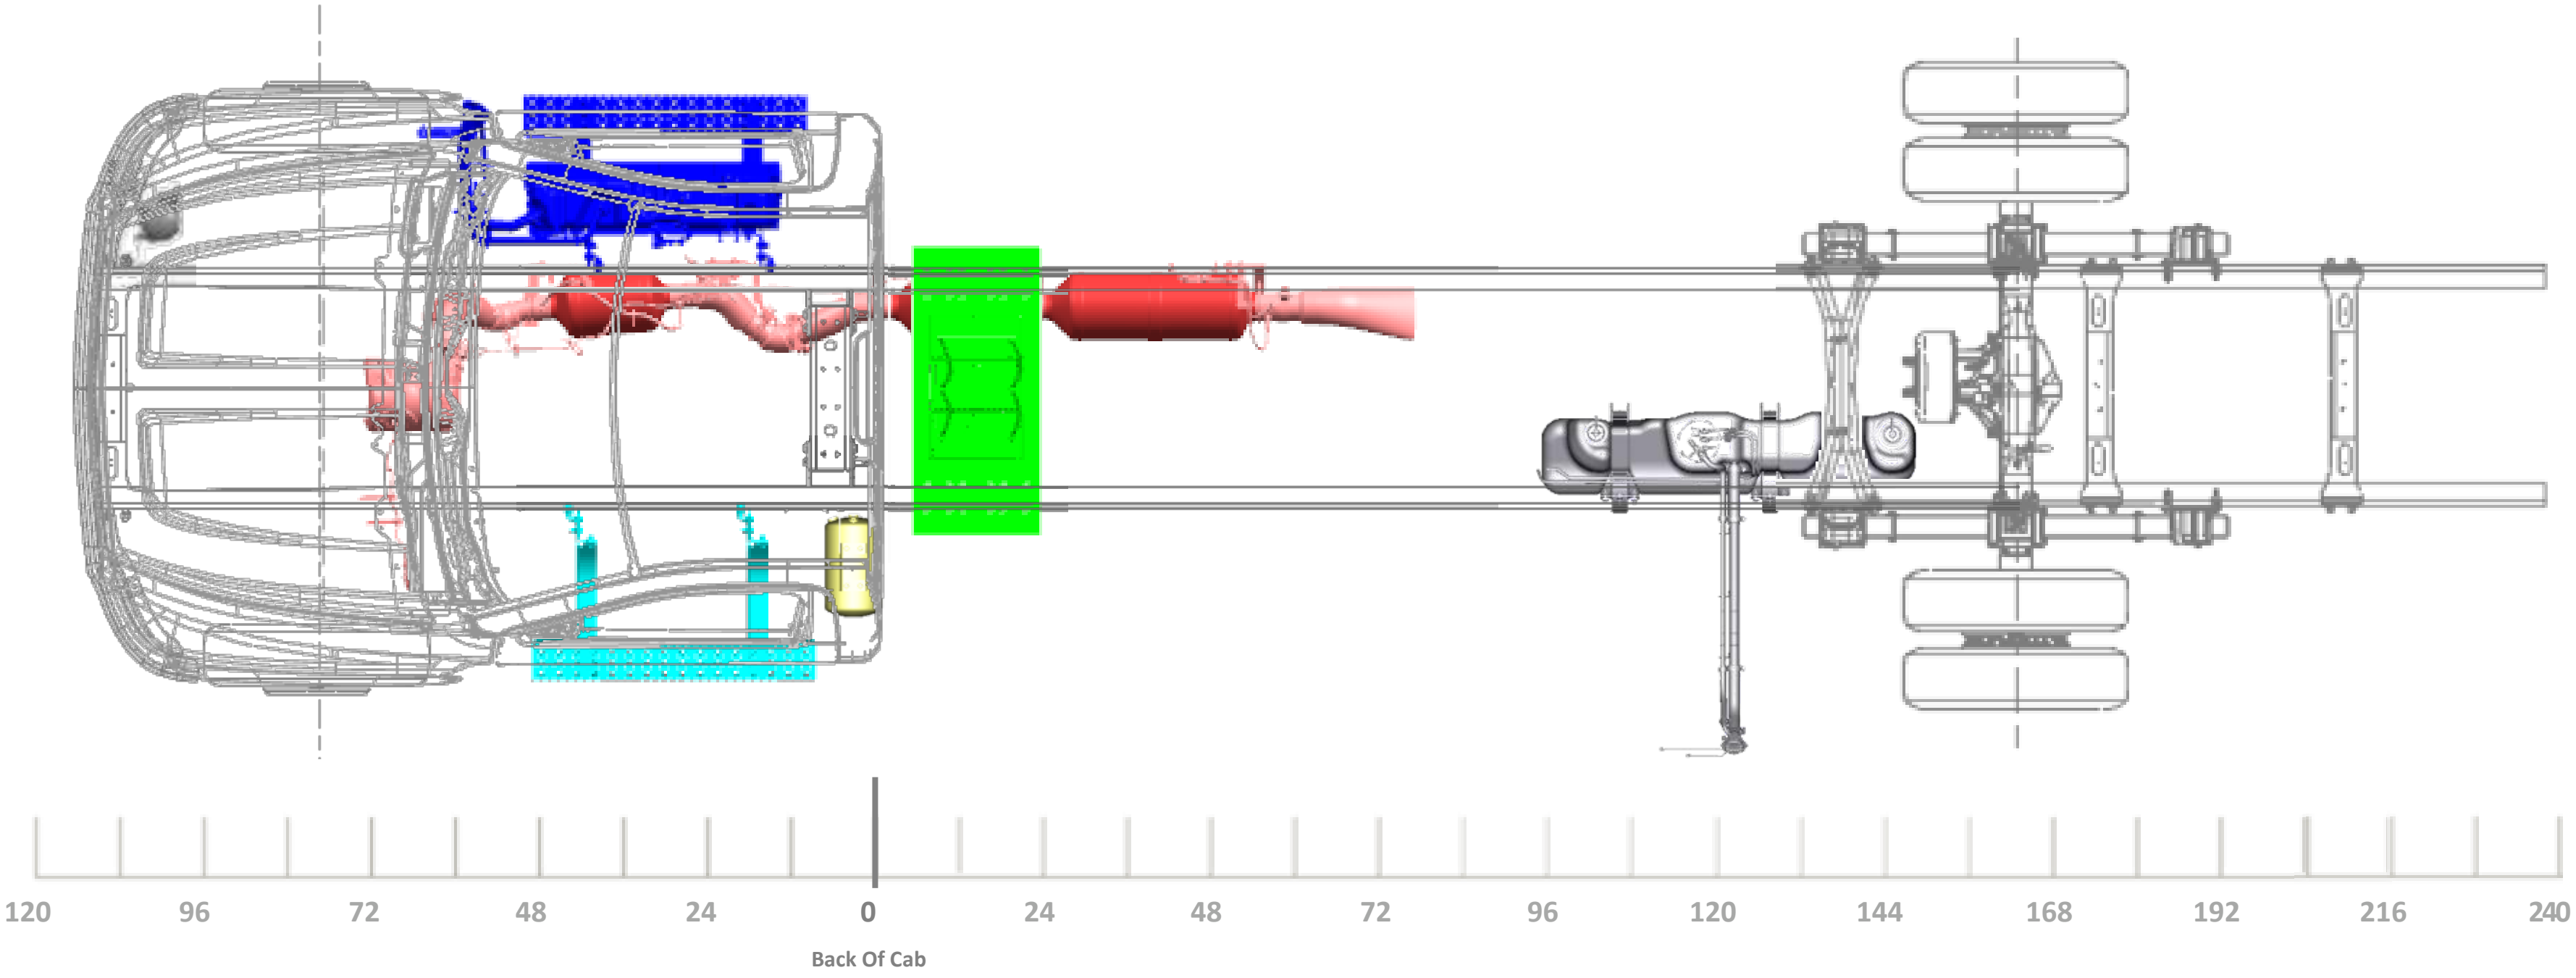
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

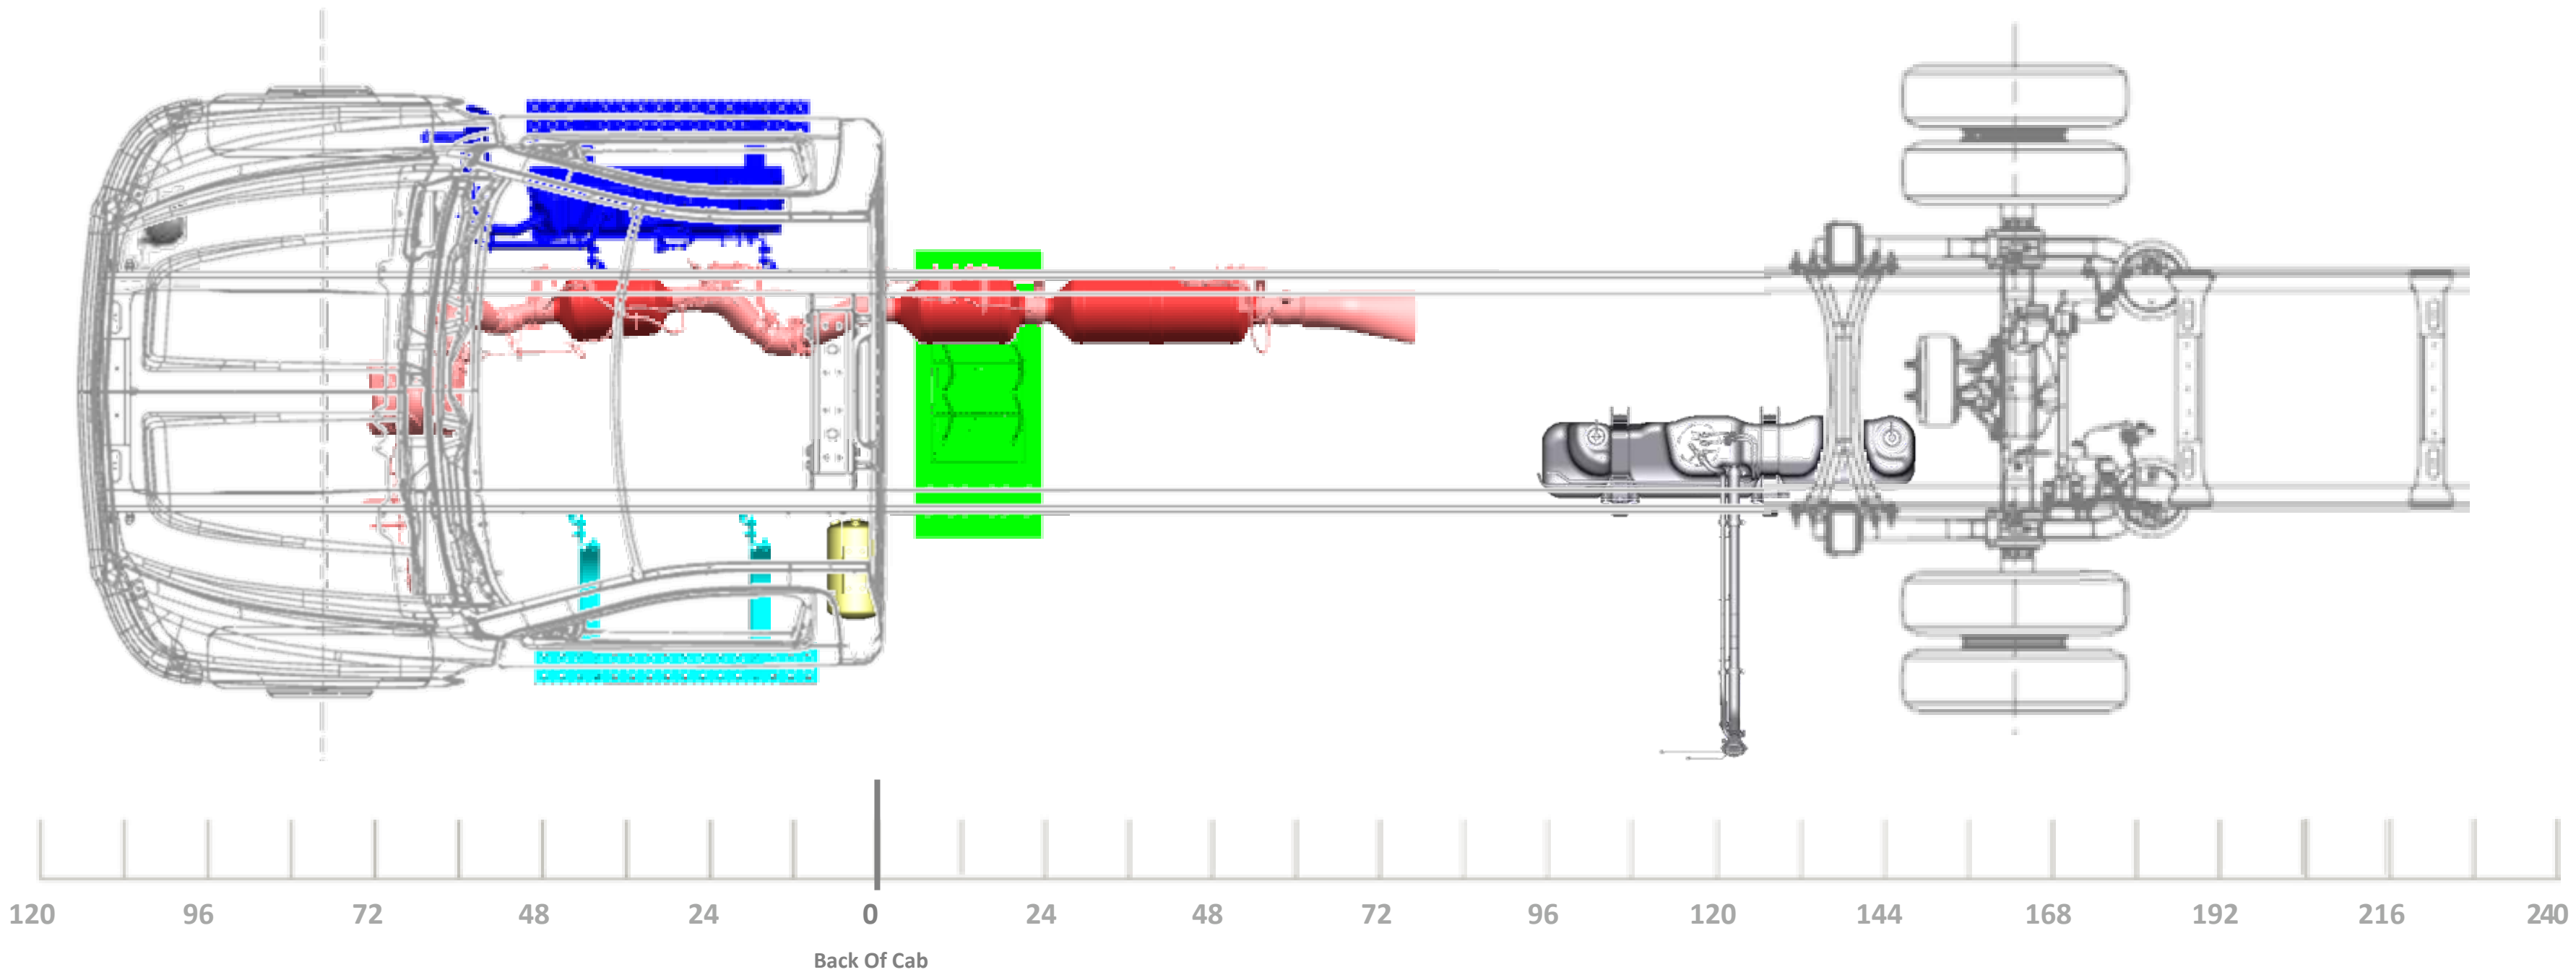
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

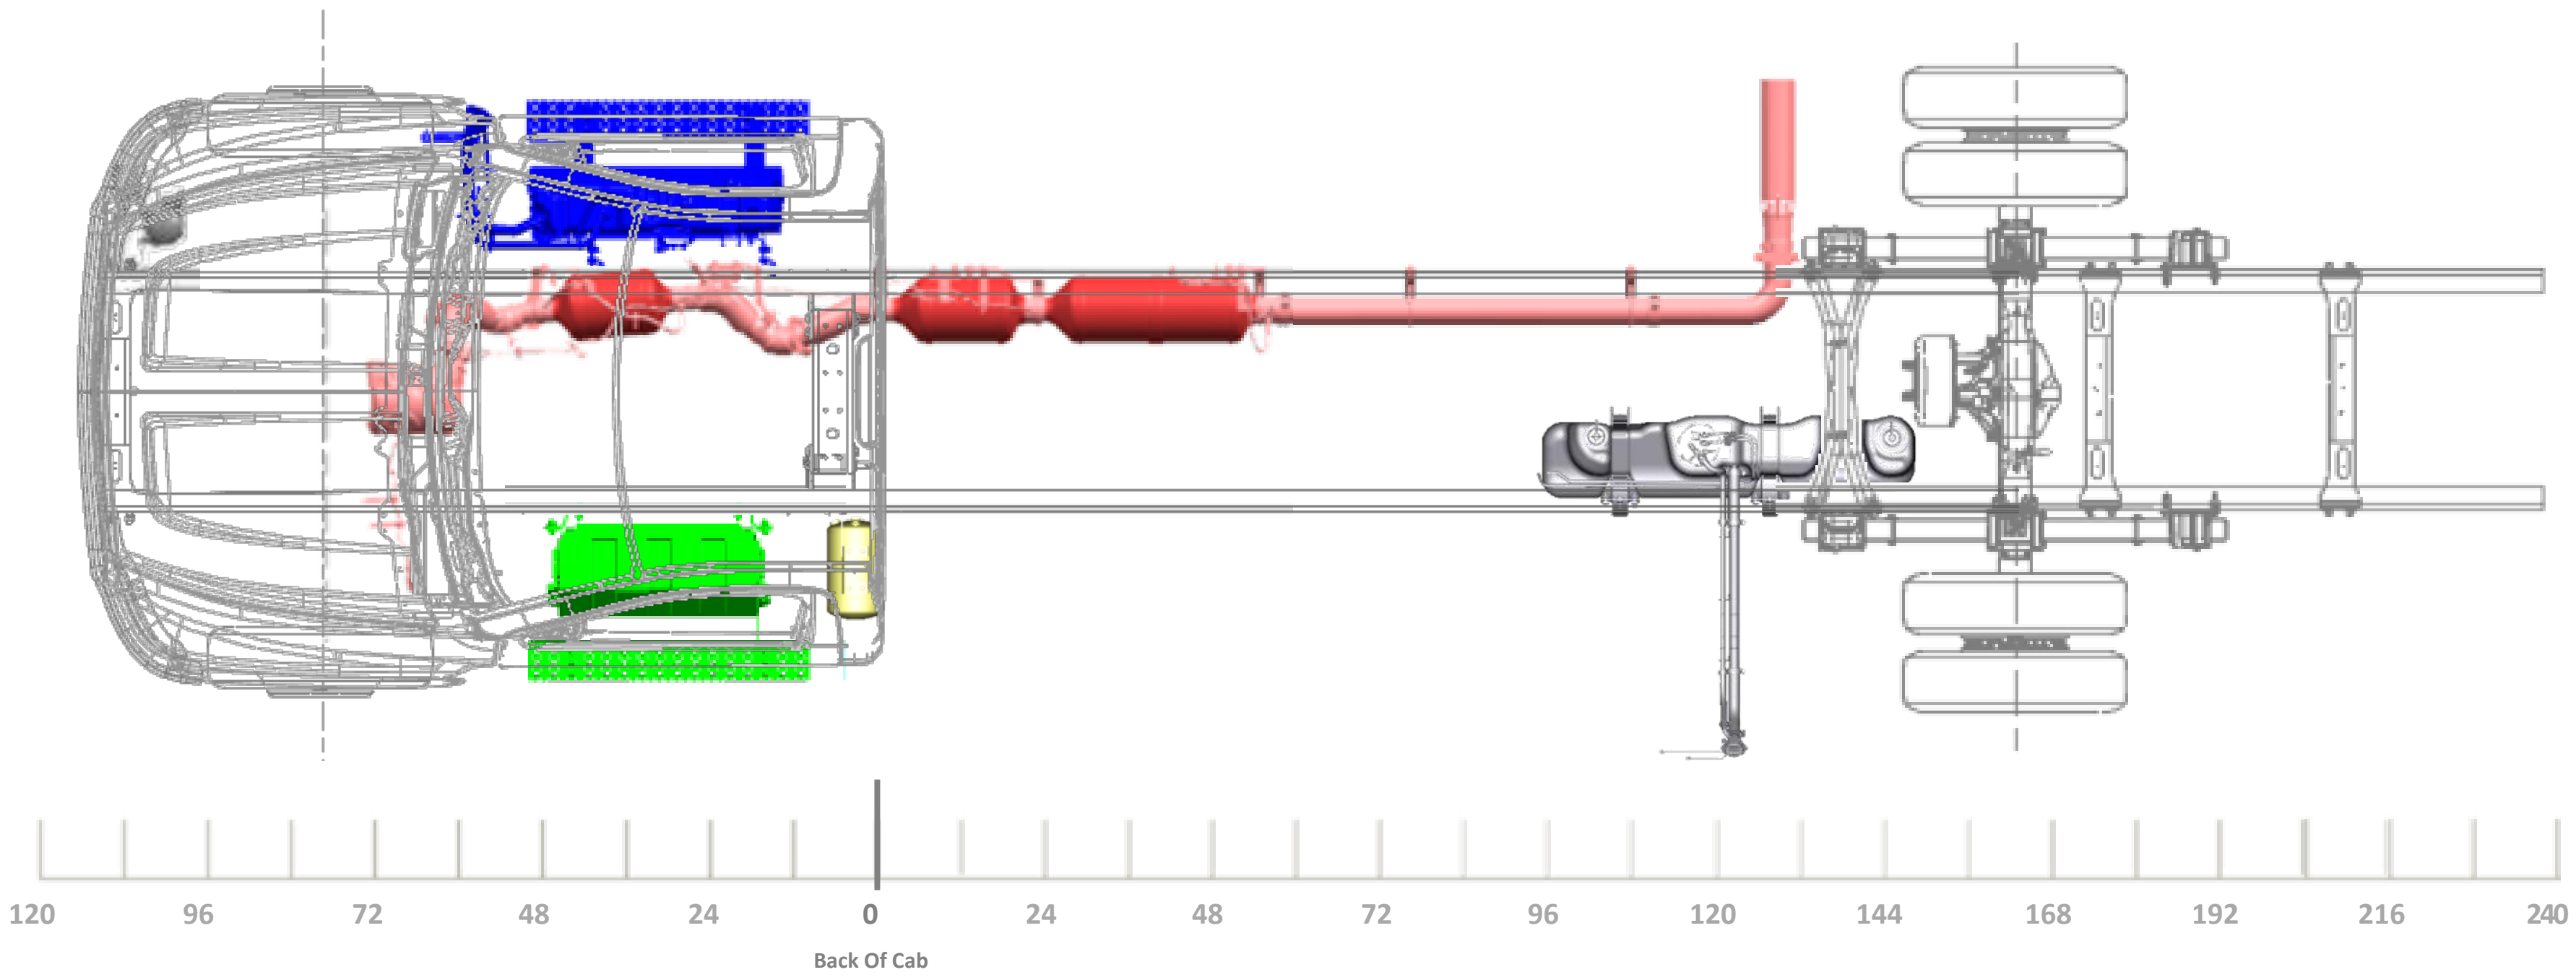
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

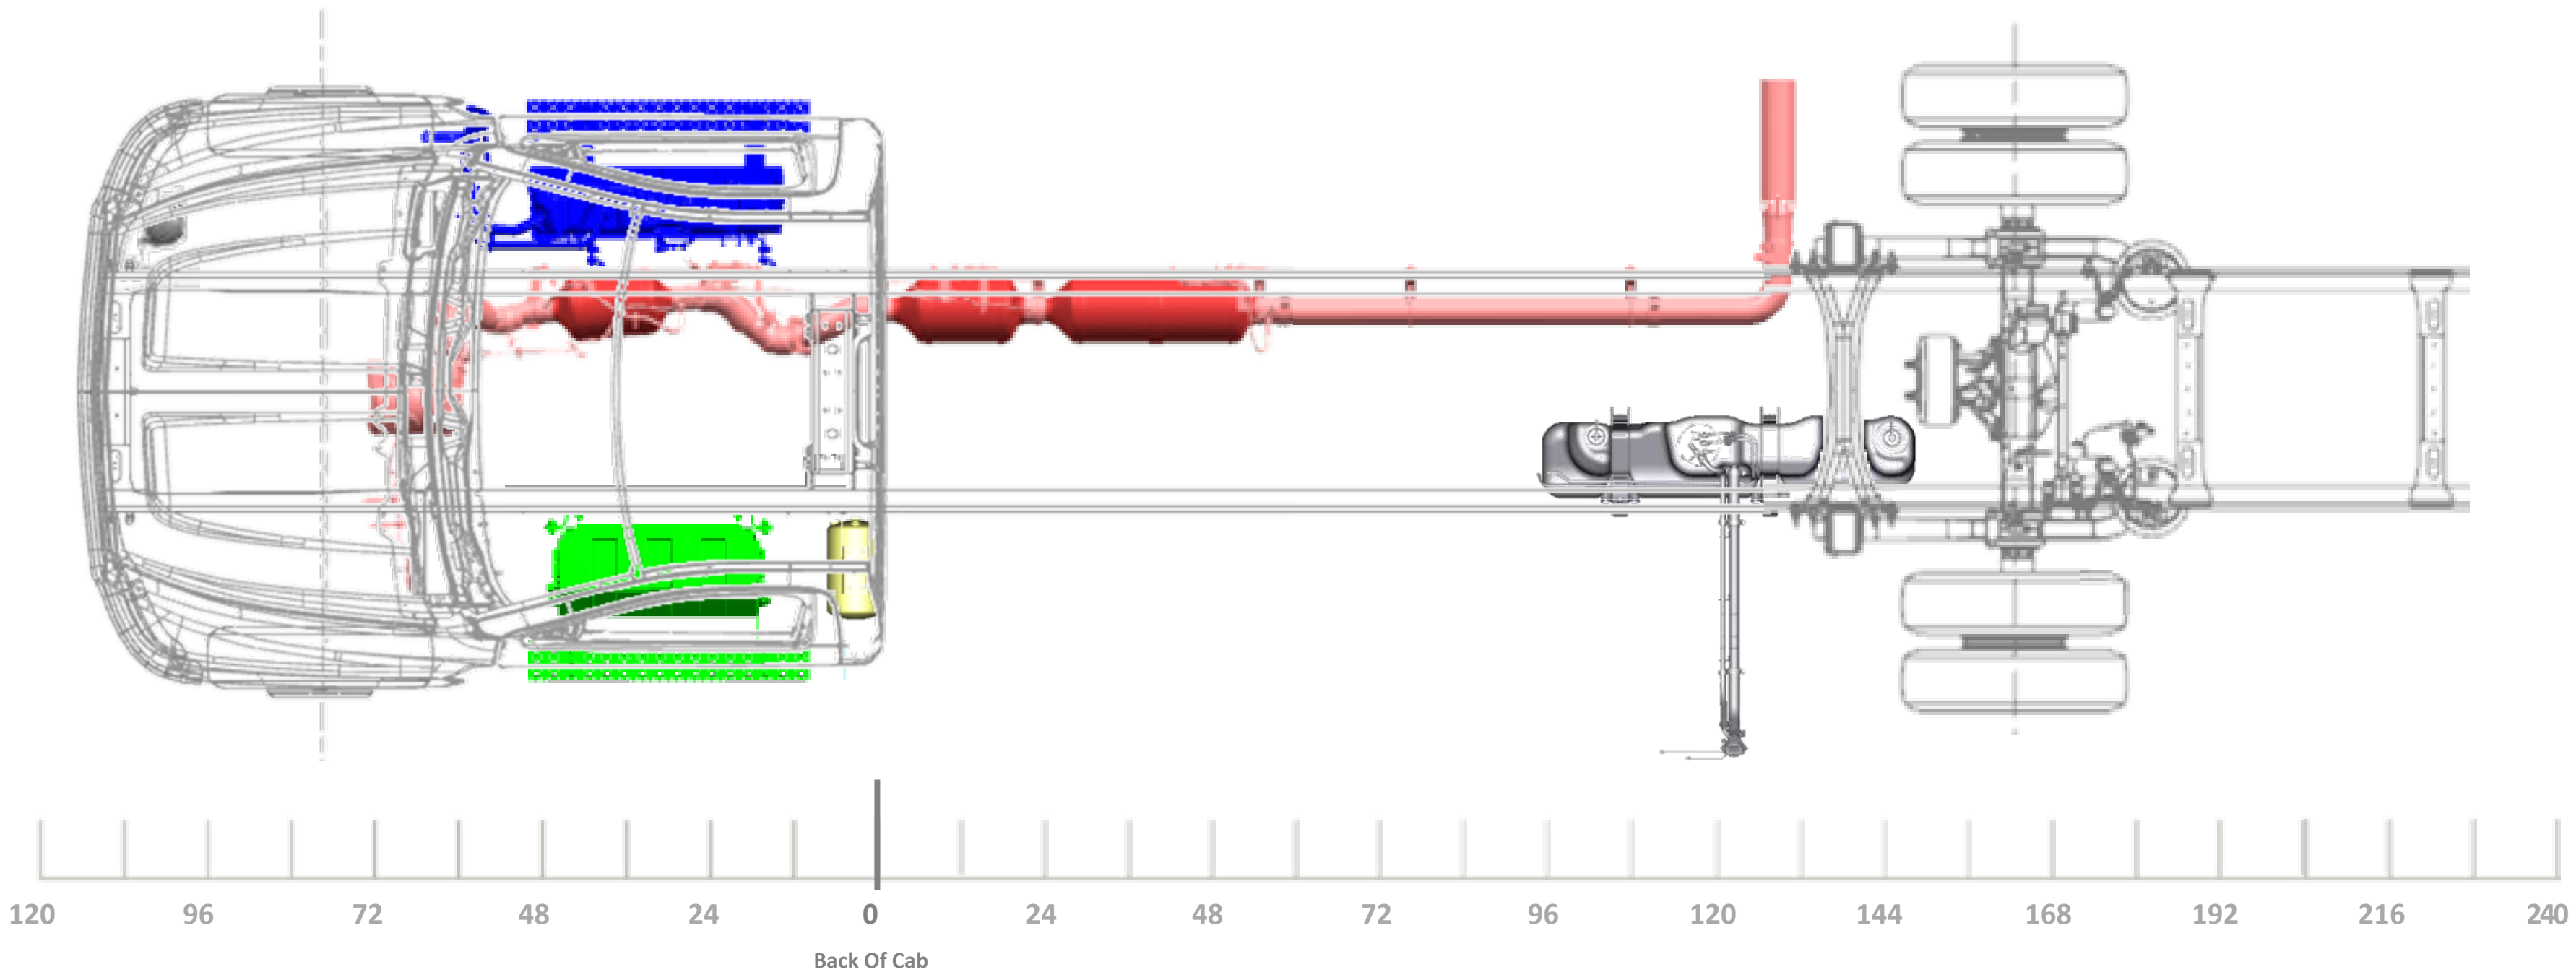
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

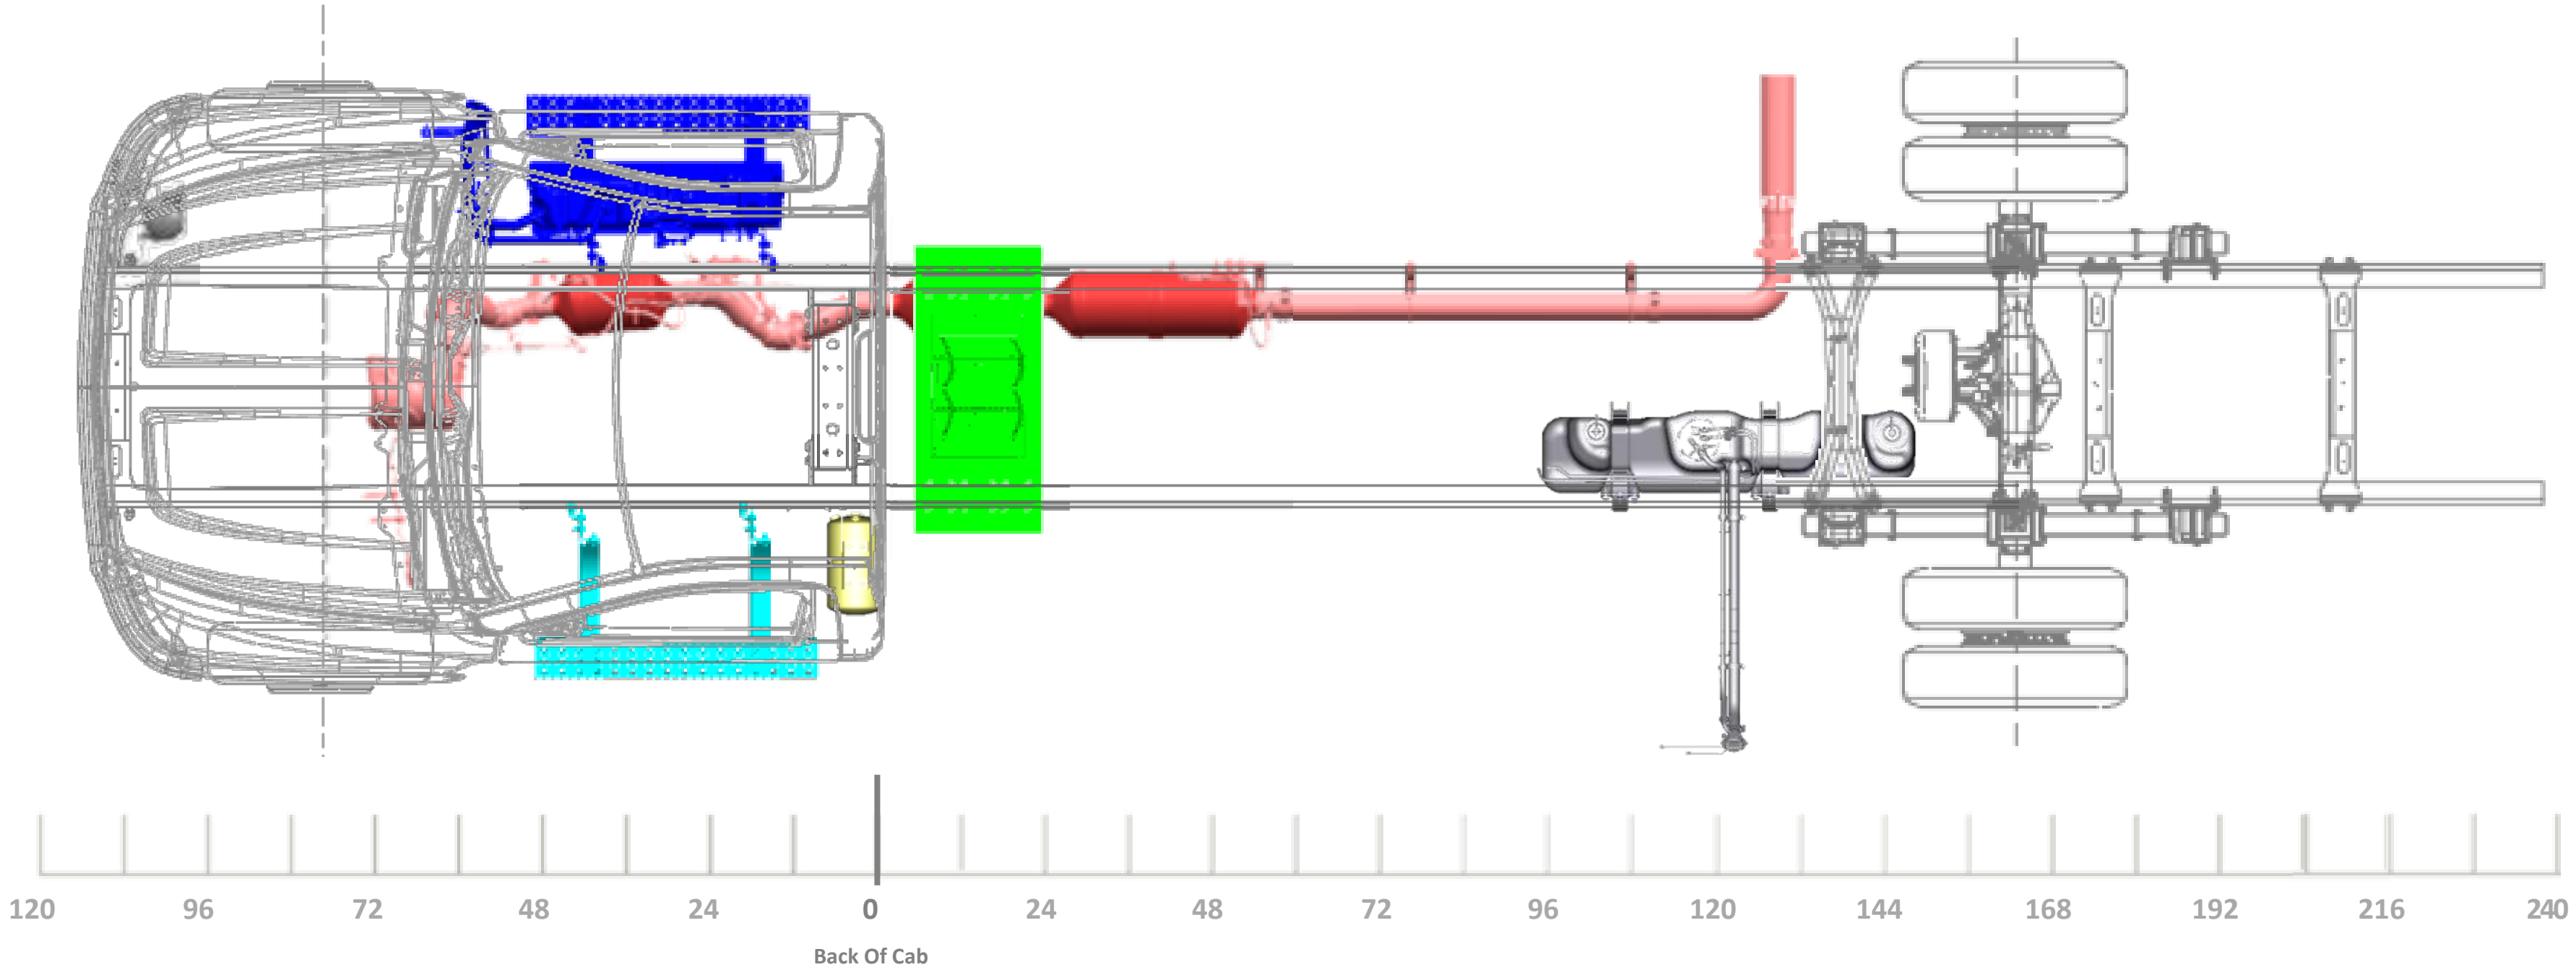
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

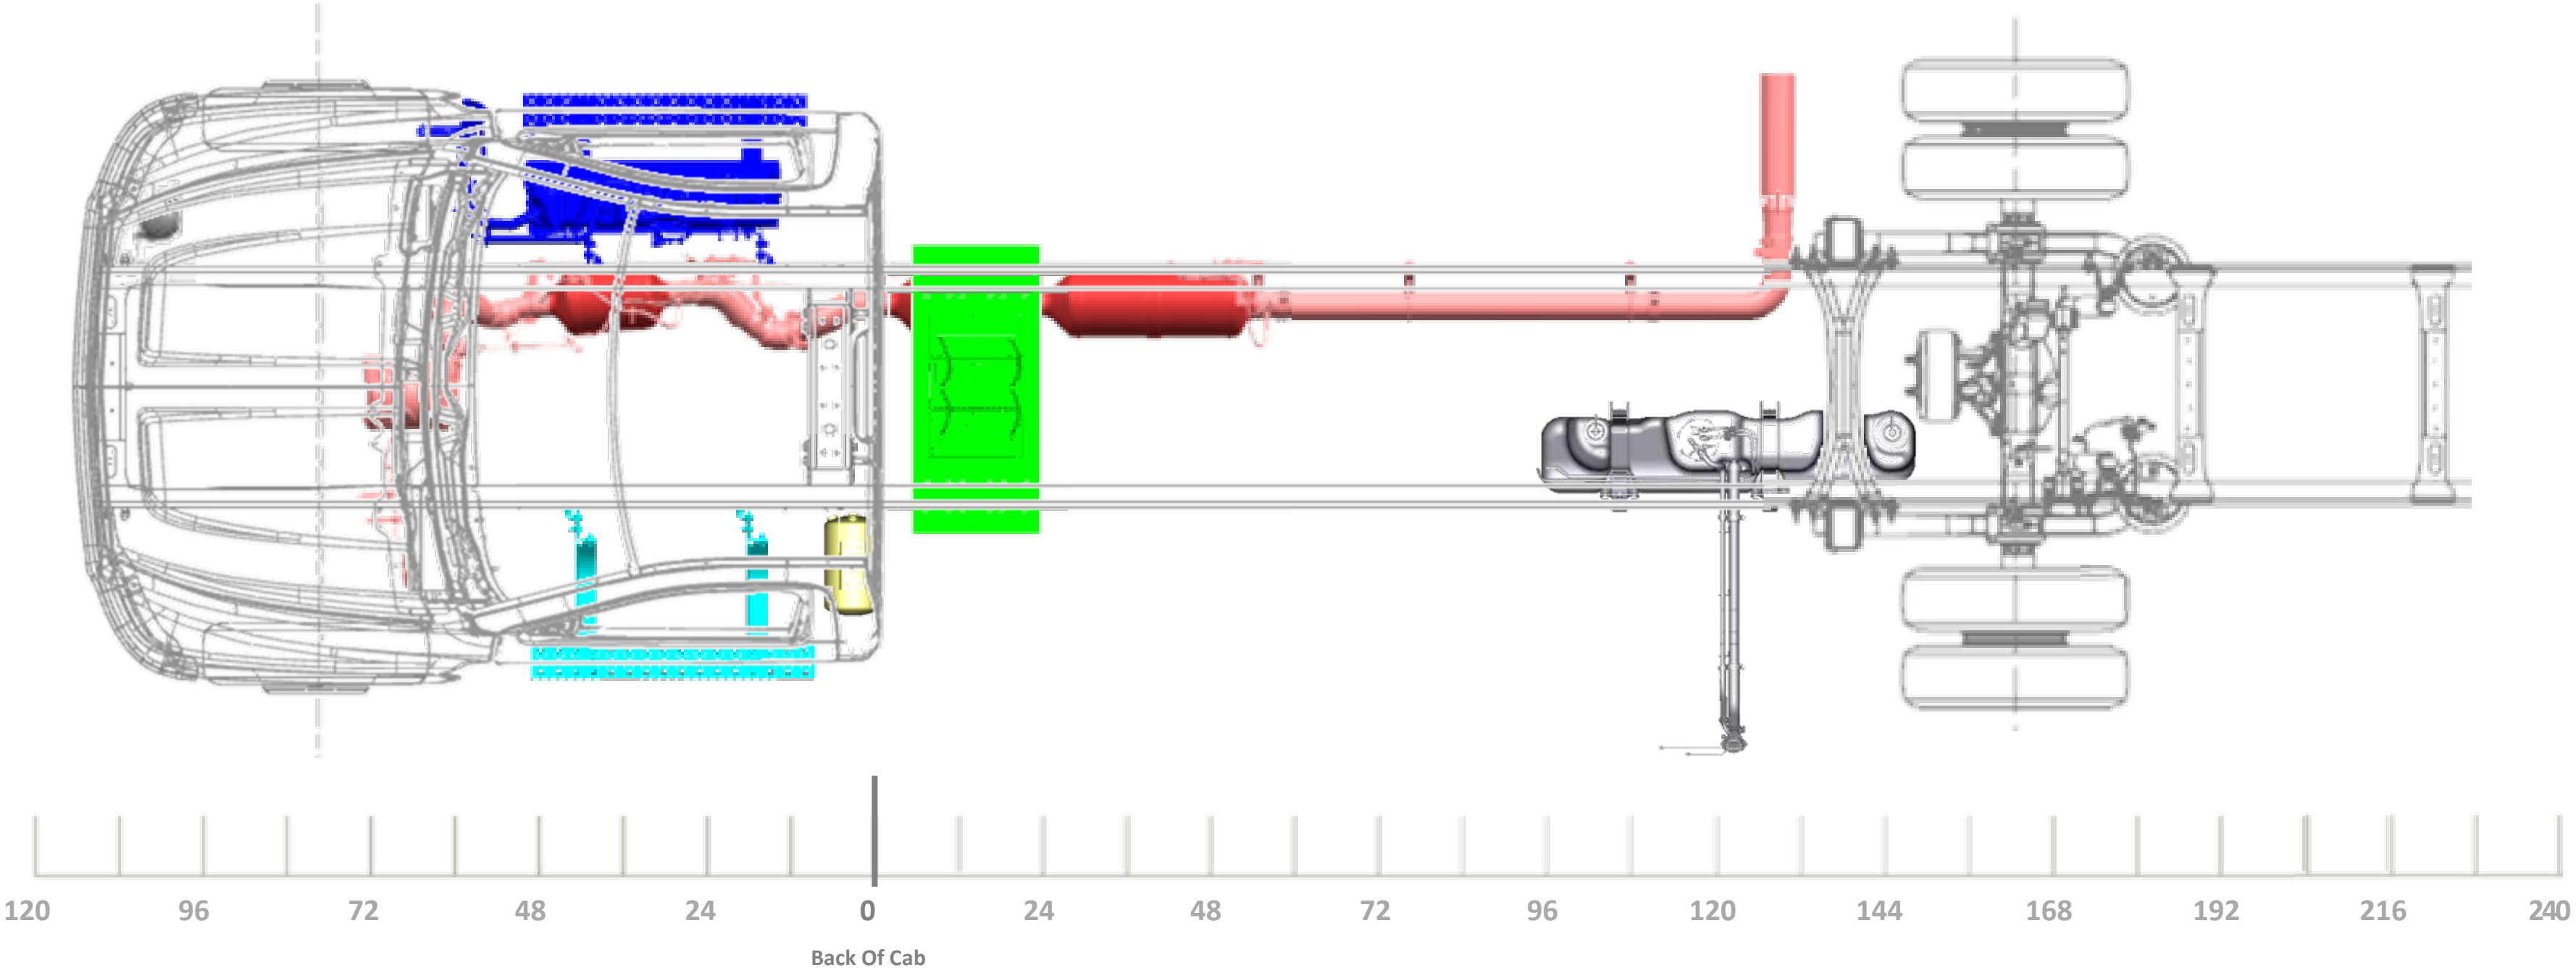
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

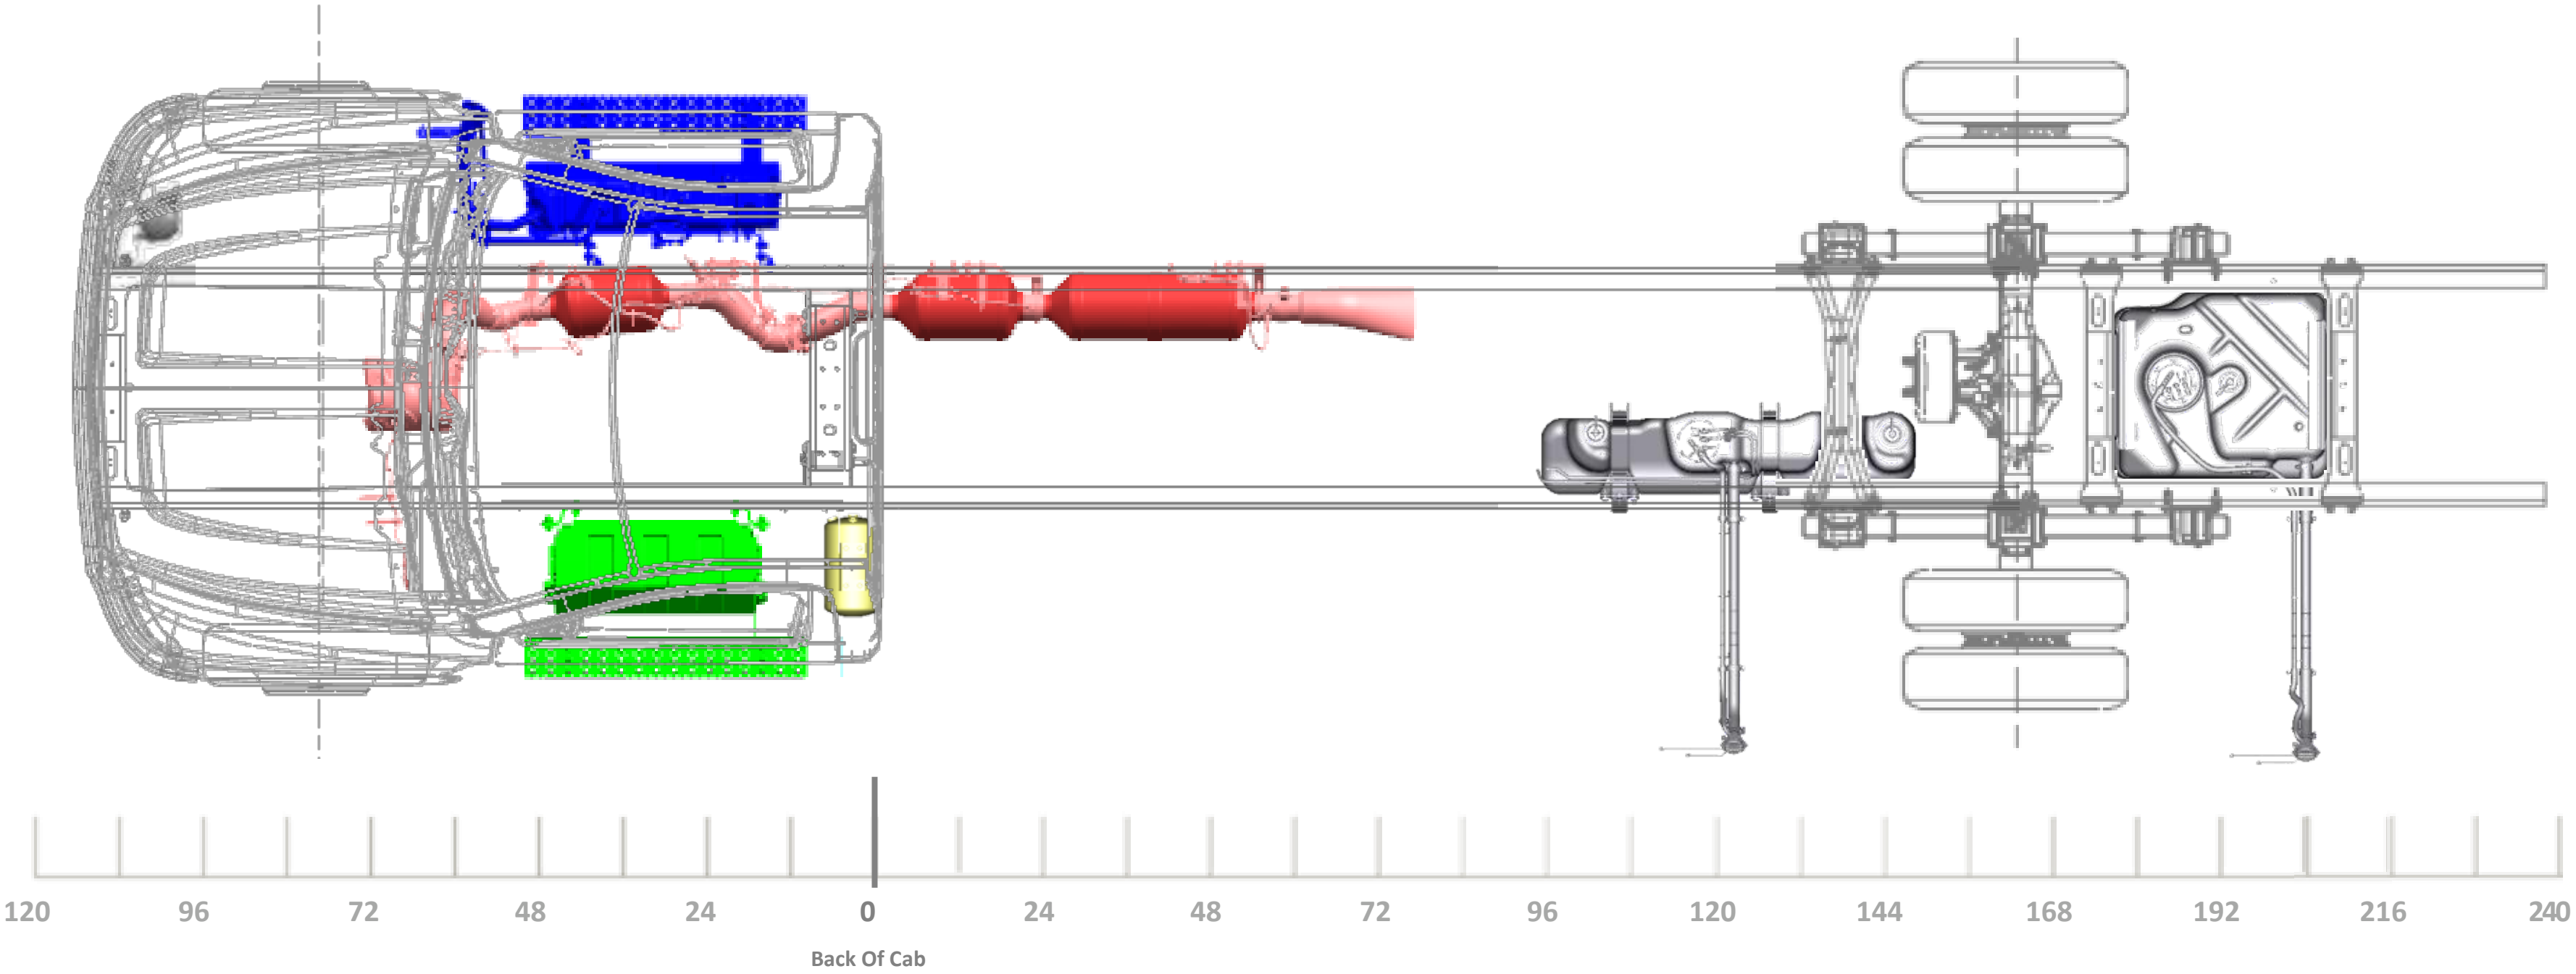
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

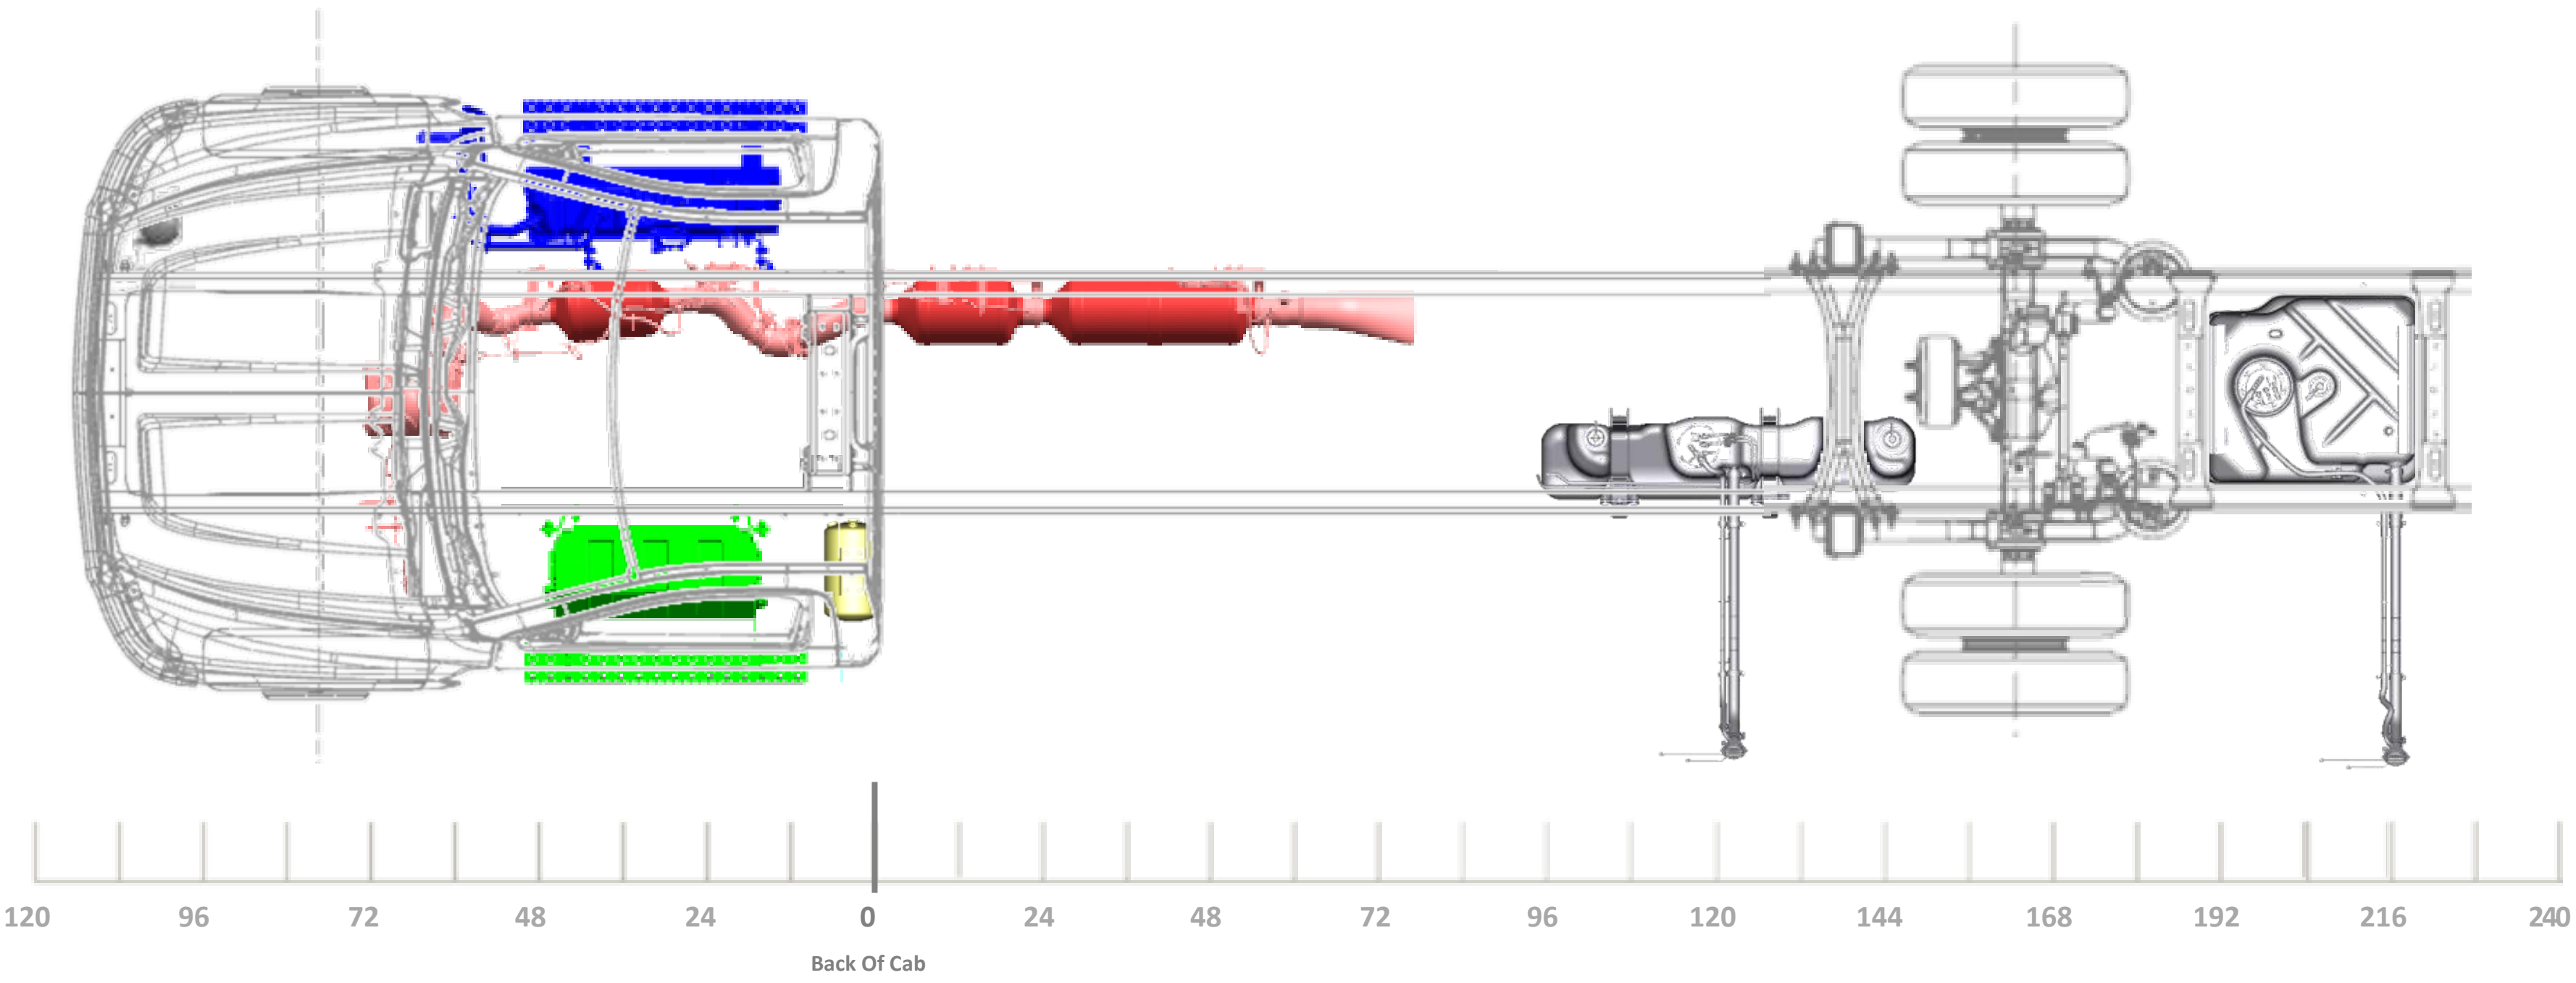
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION

VARI-RATE REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)

83”AF

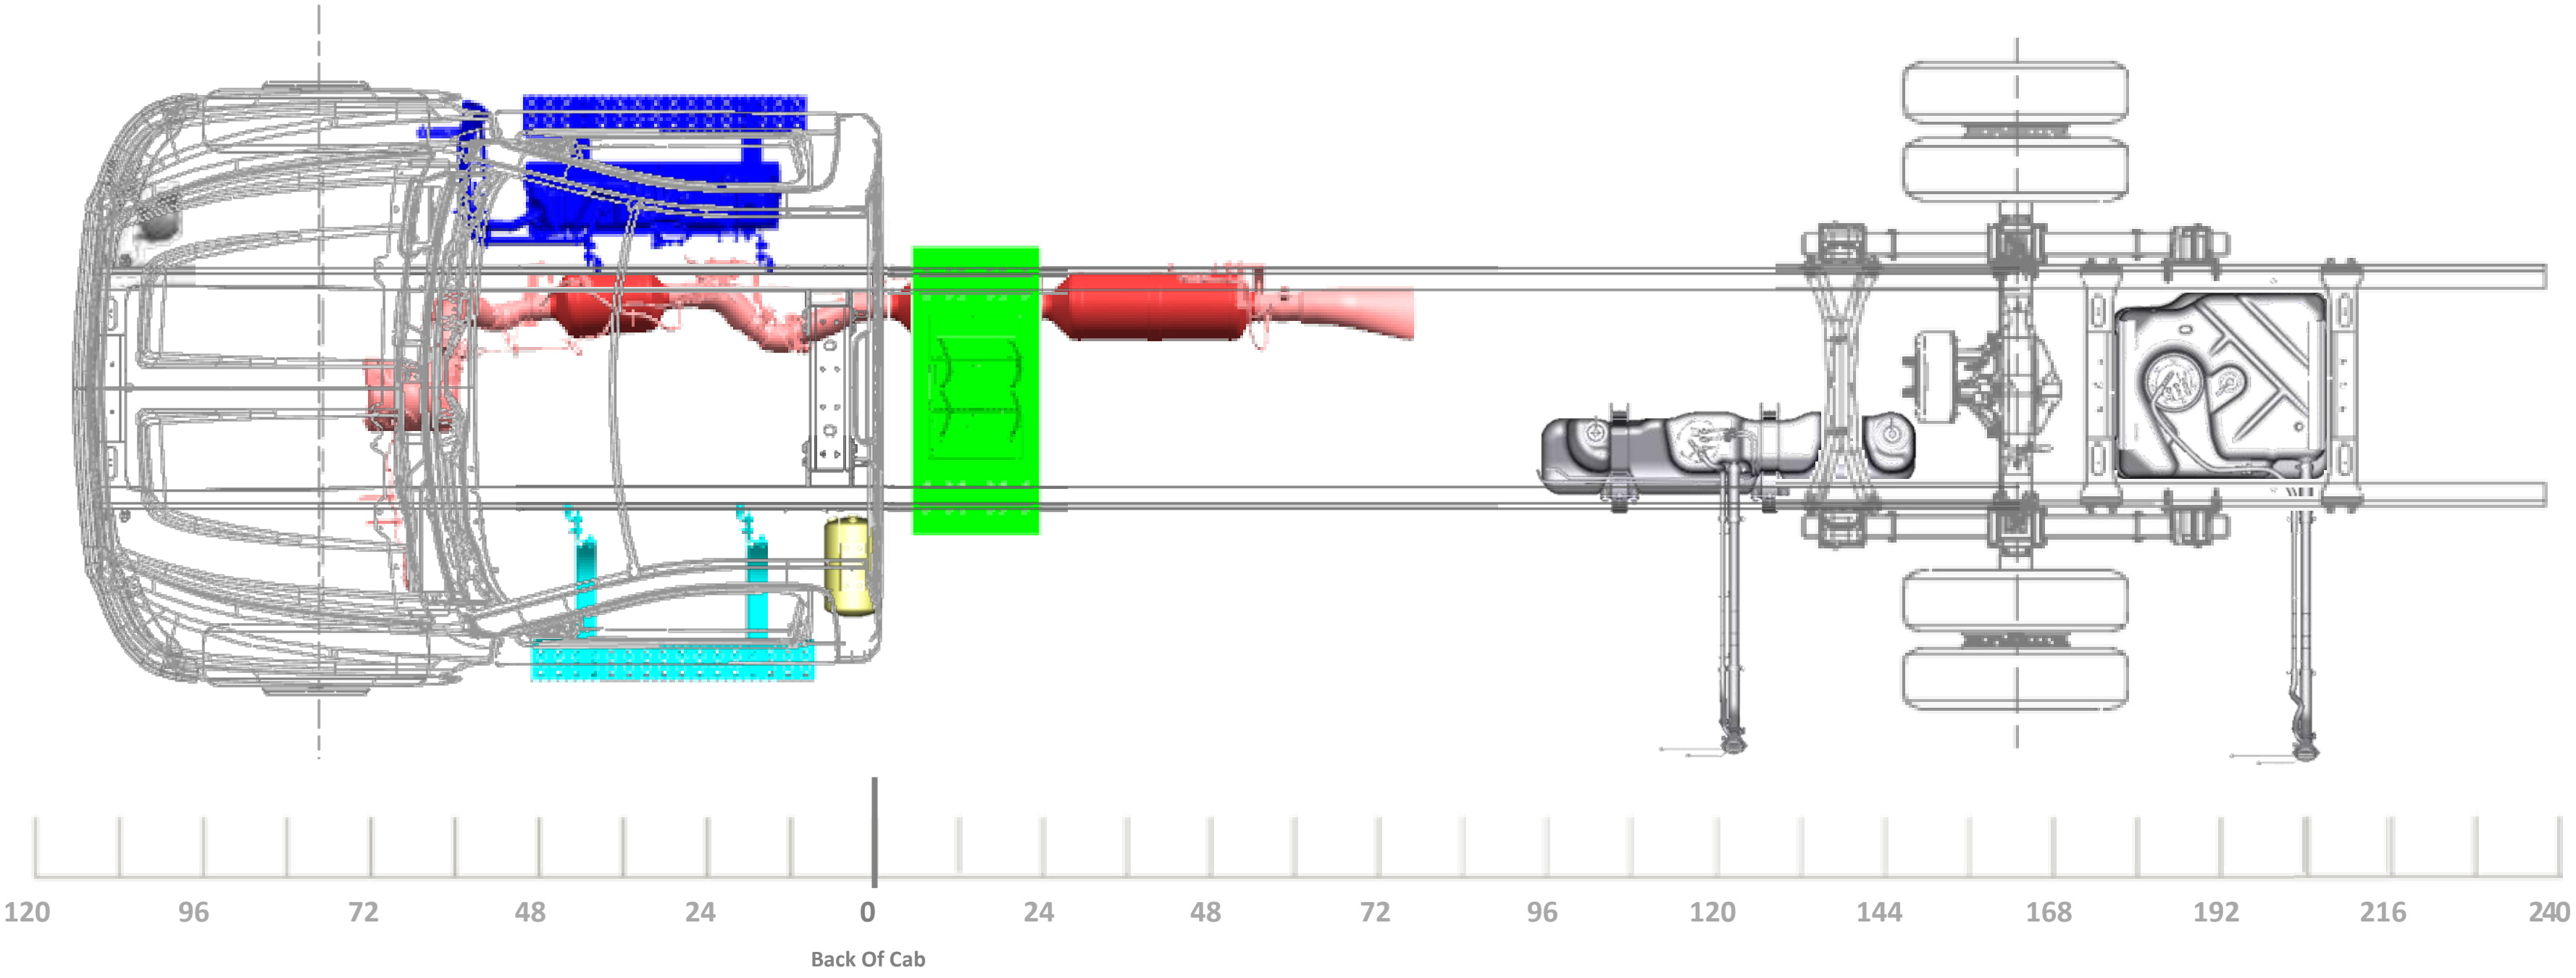
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

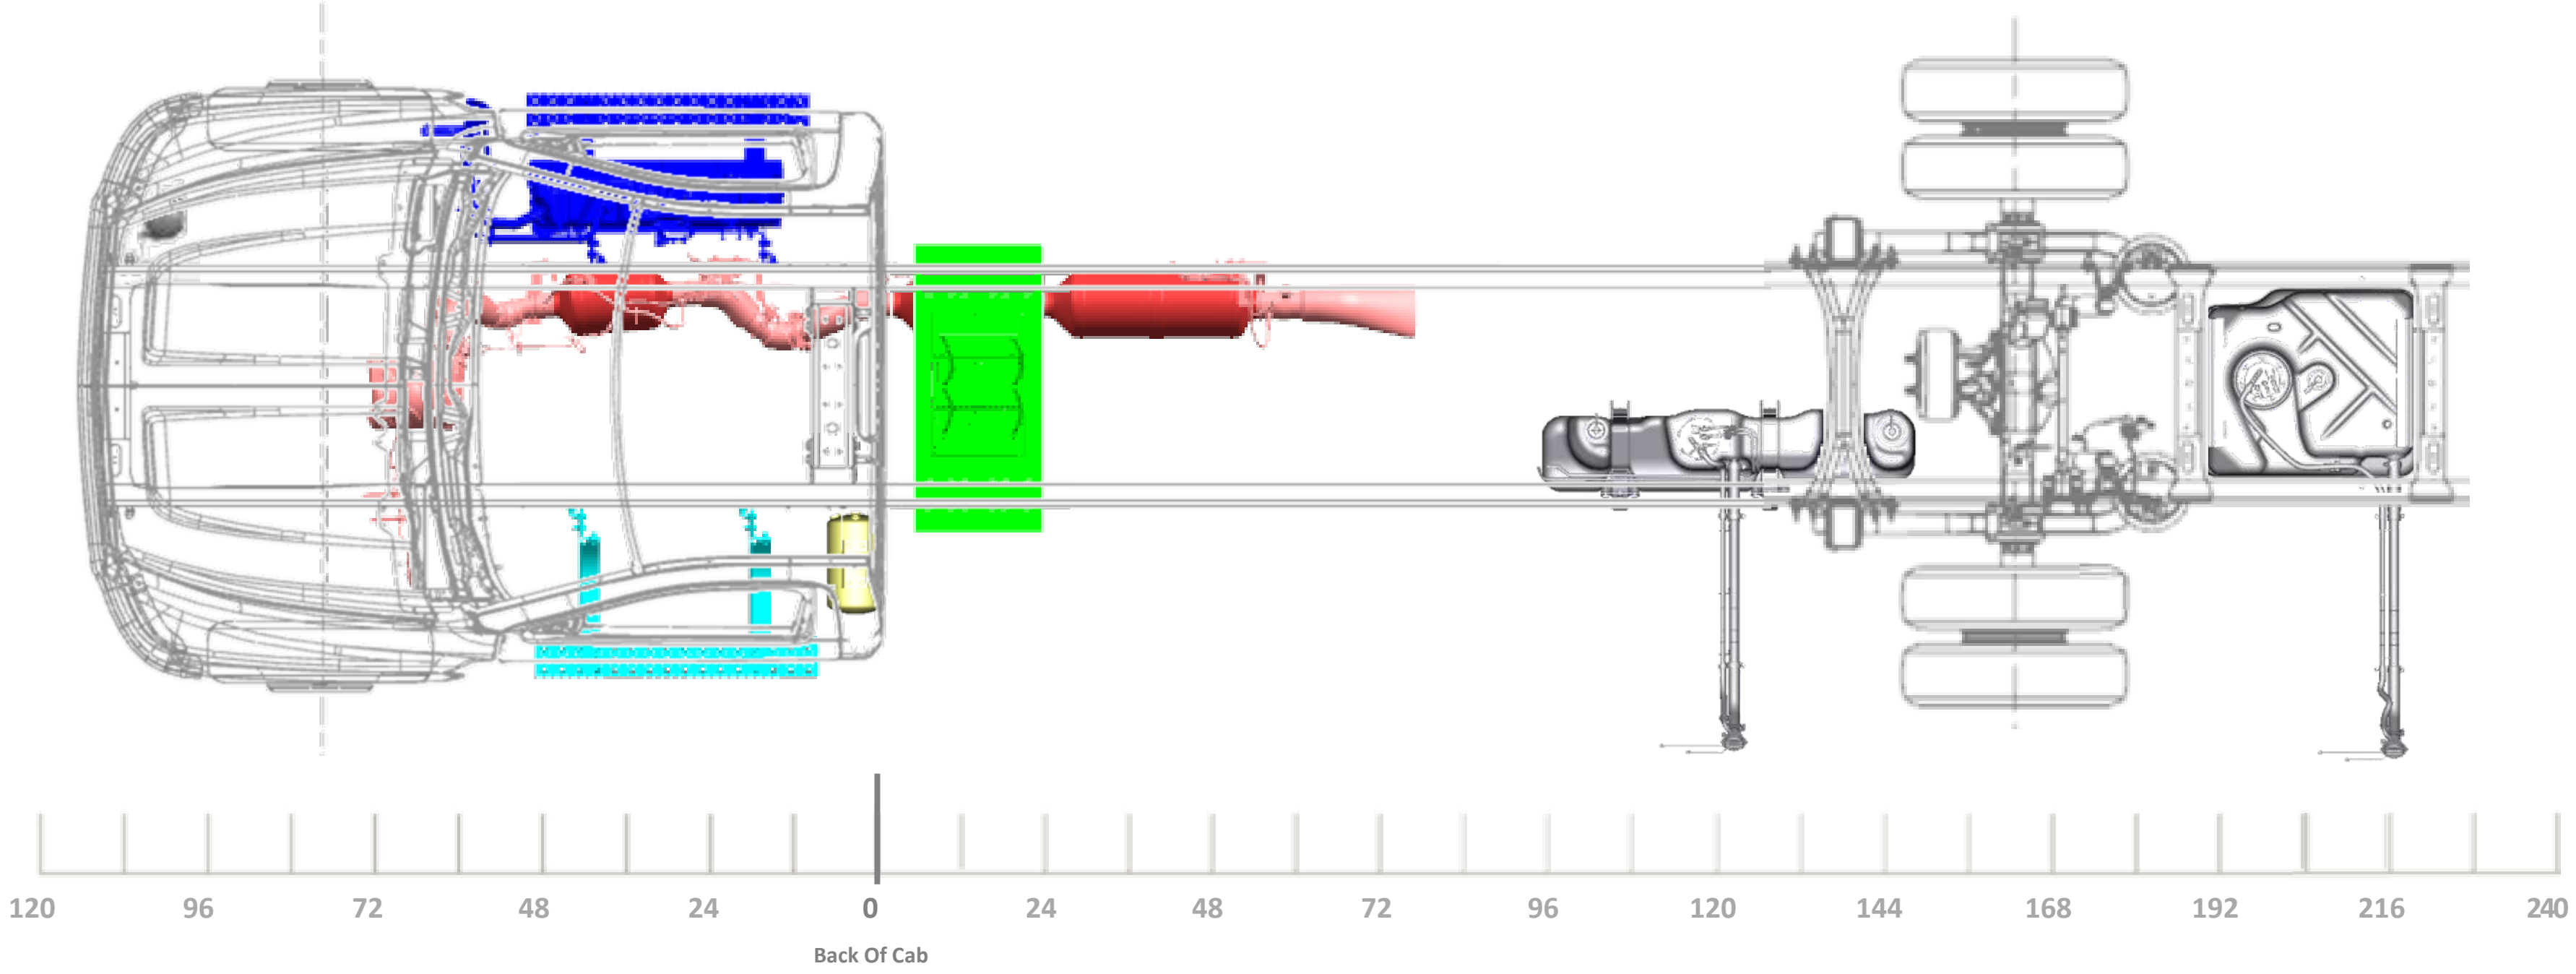
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

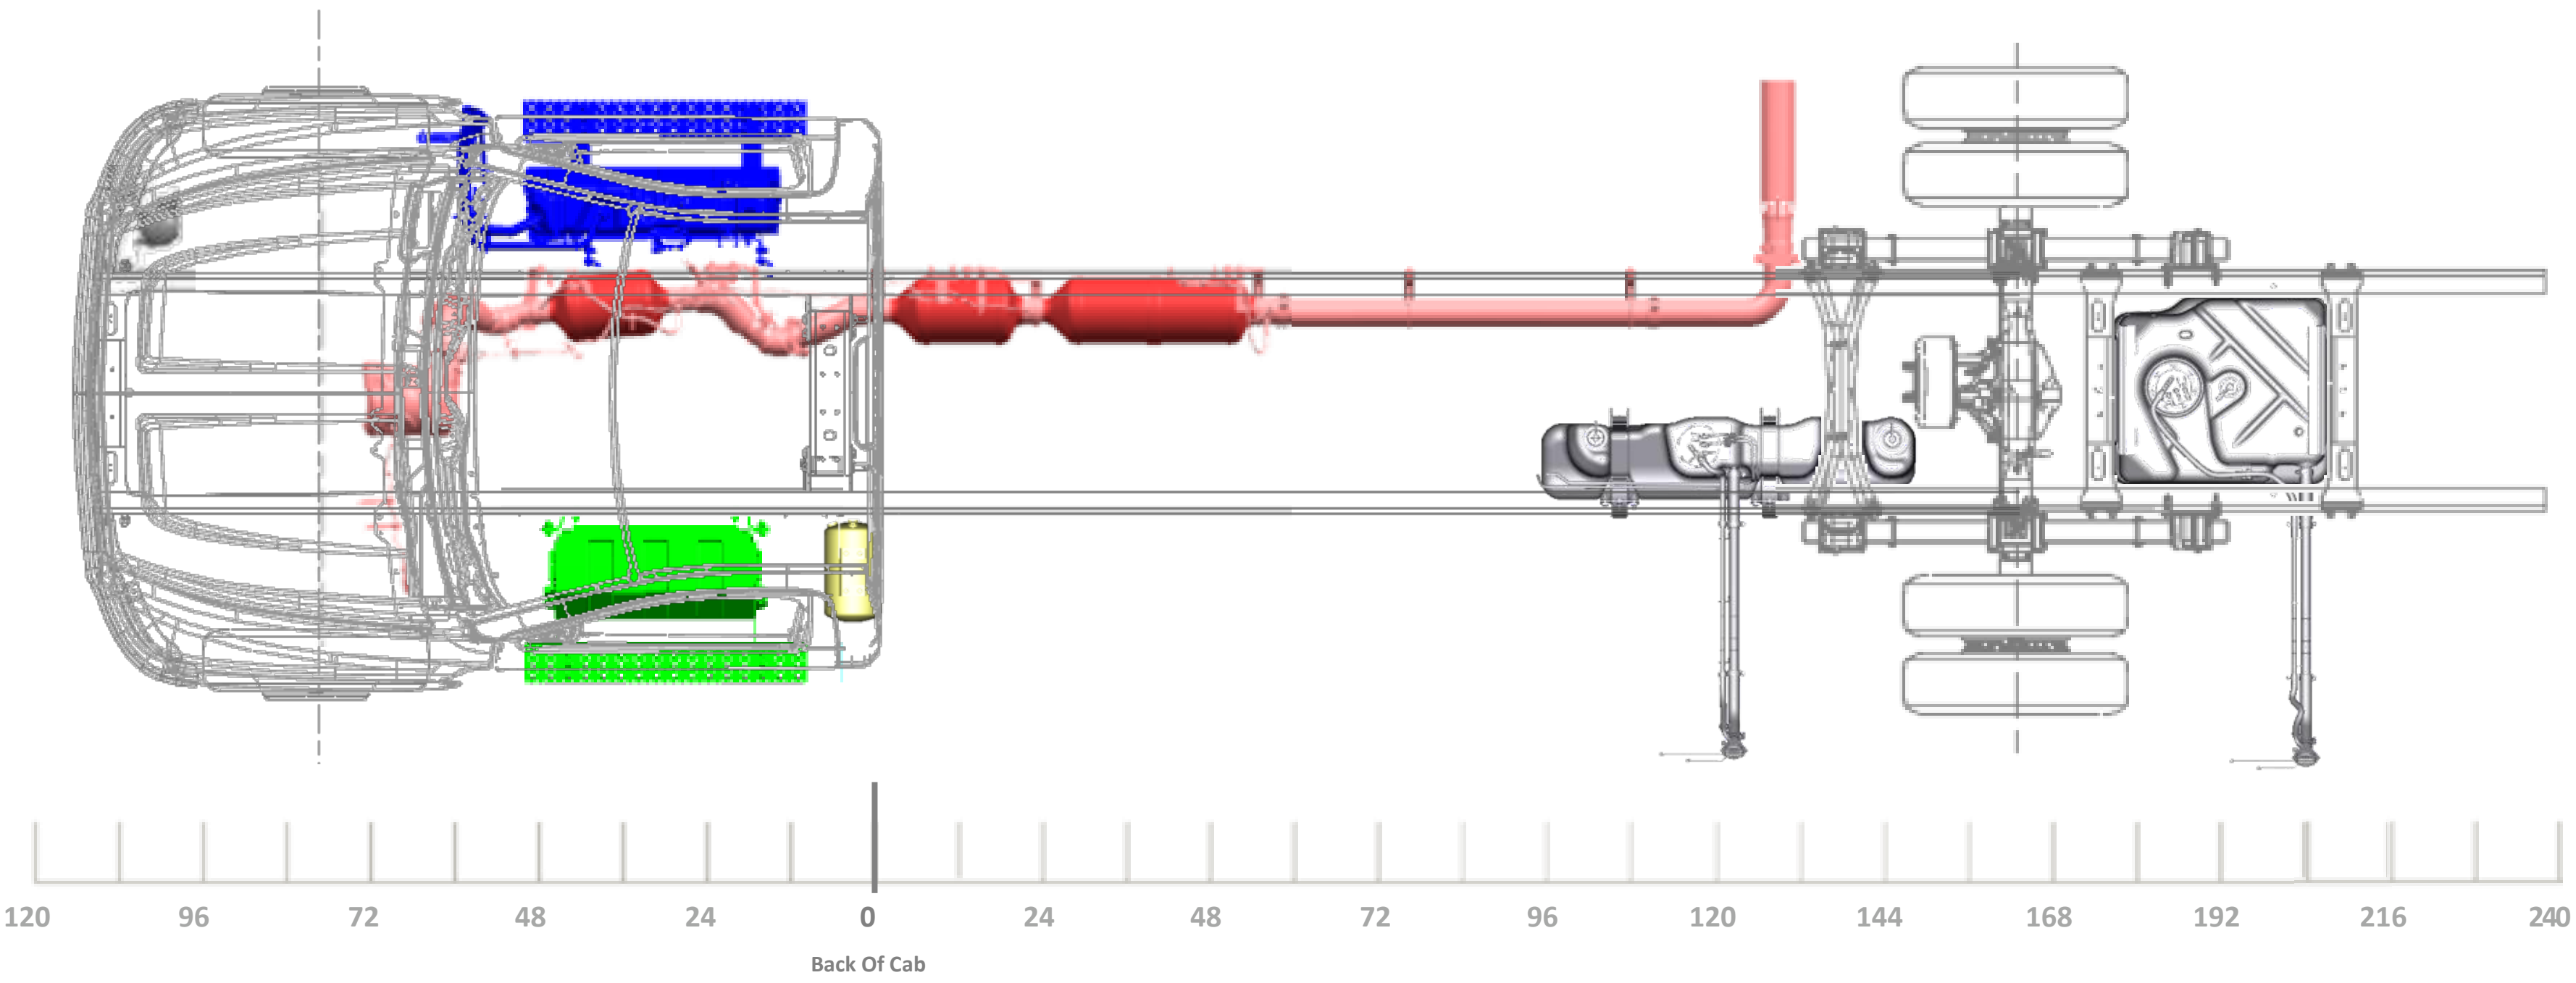
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

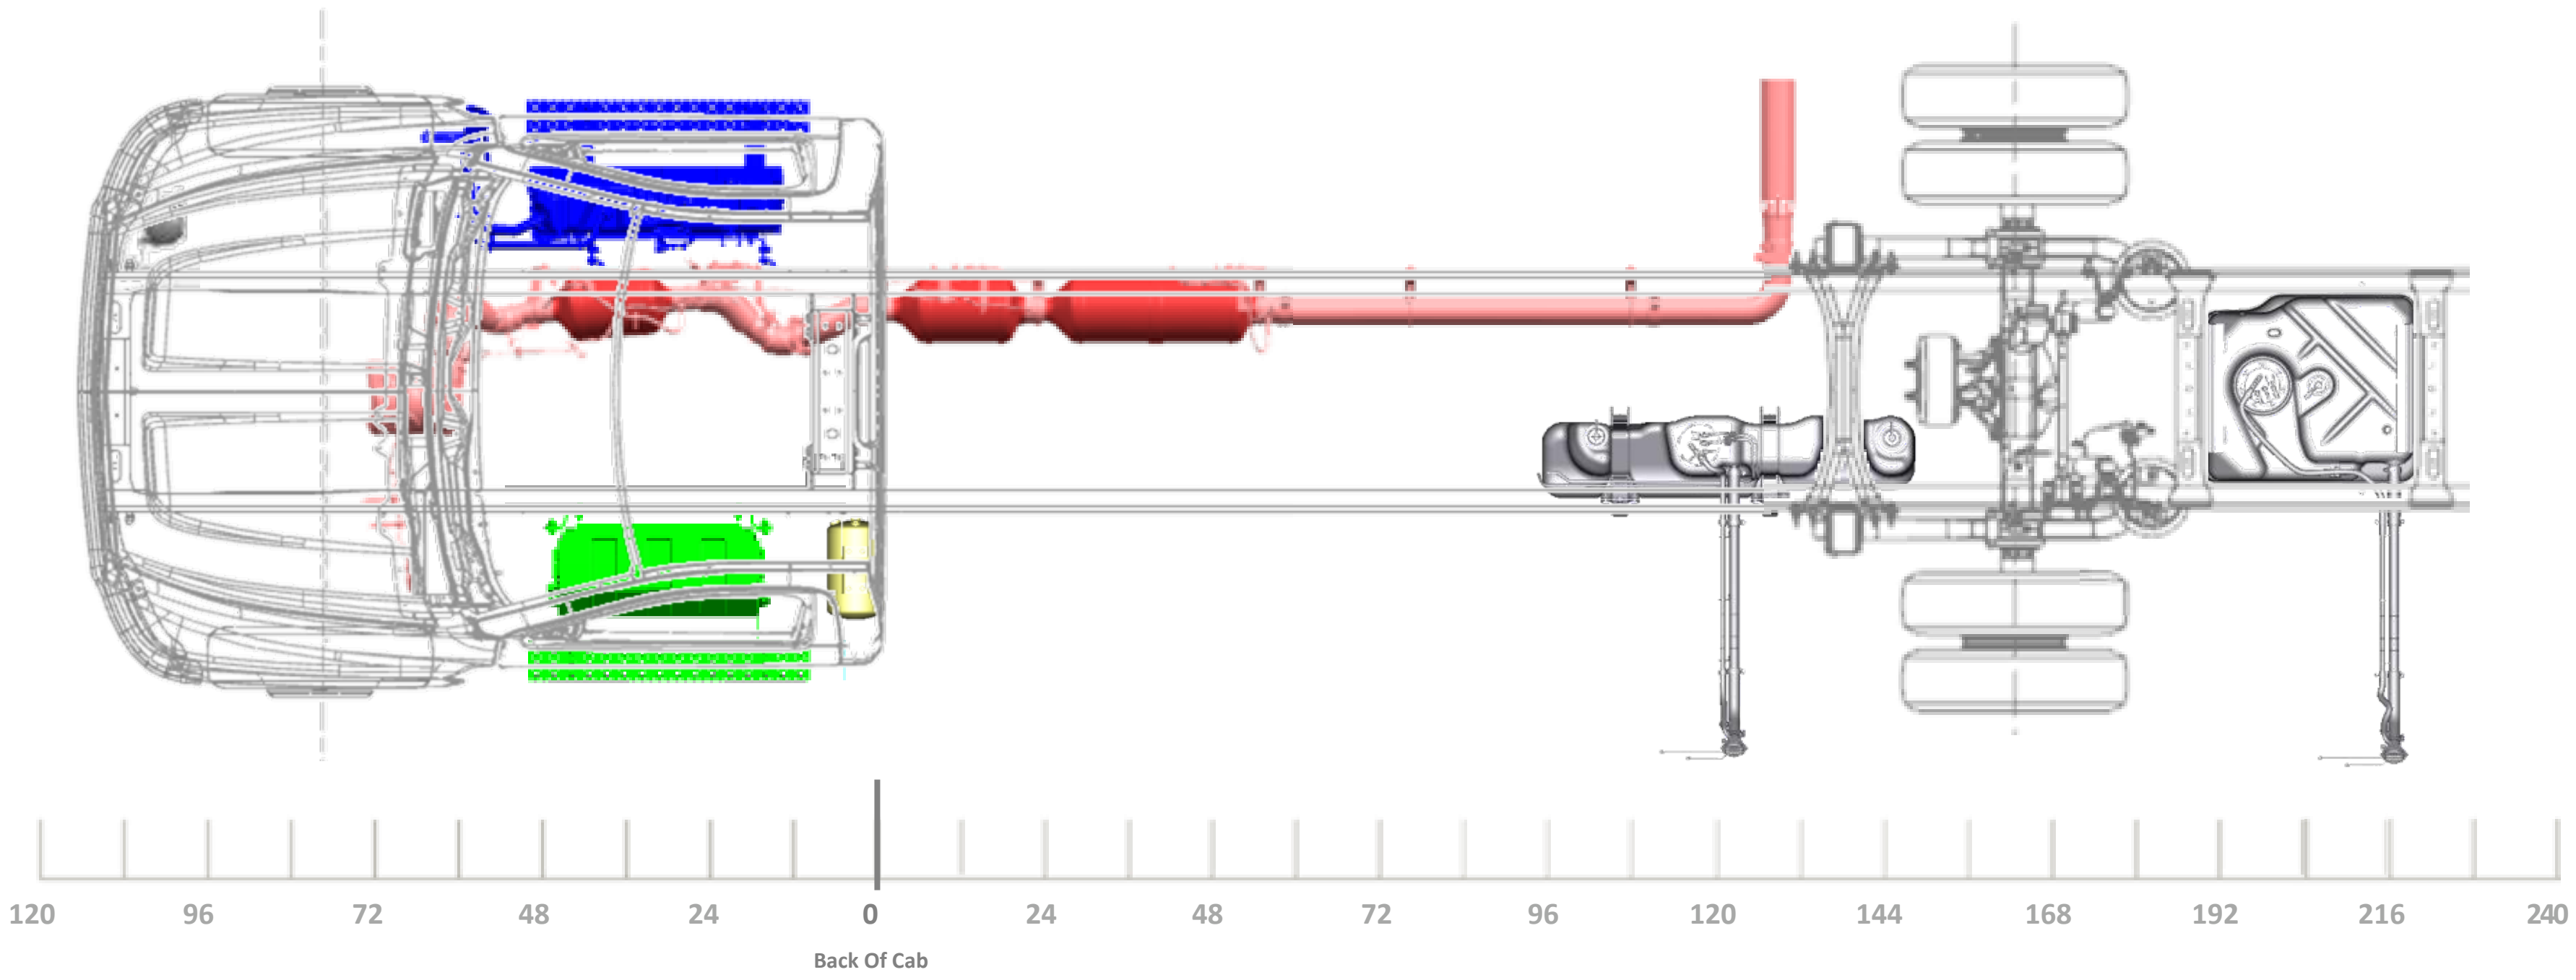
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
VARI-RATE REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

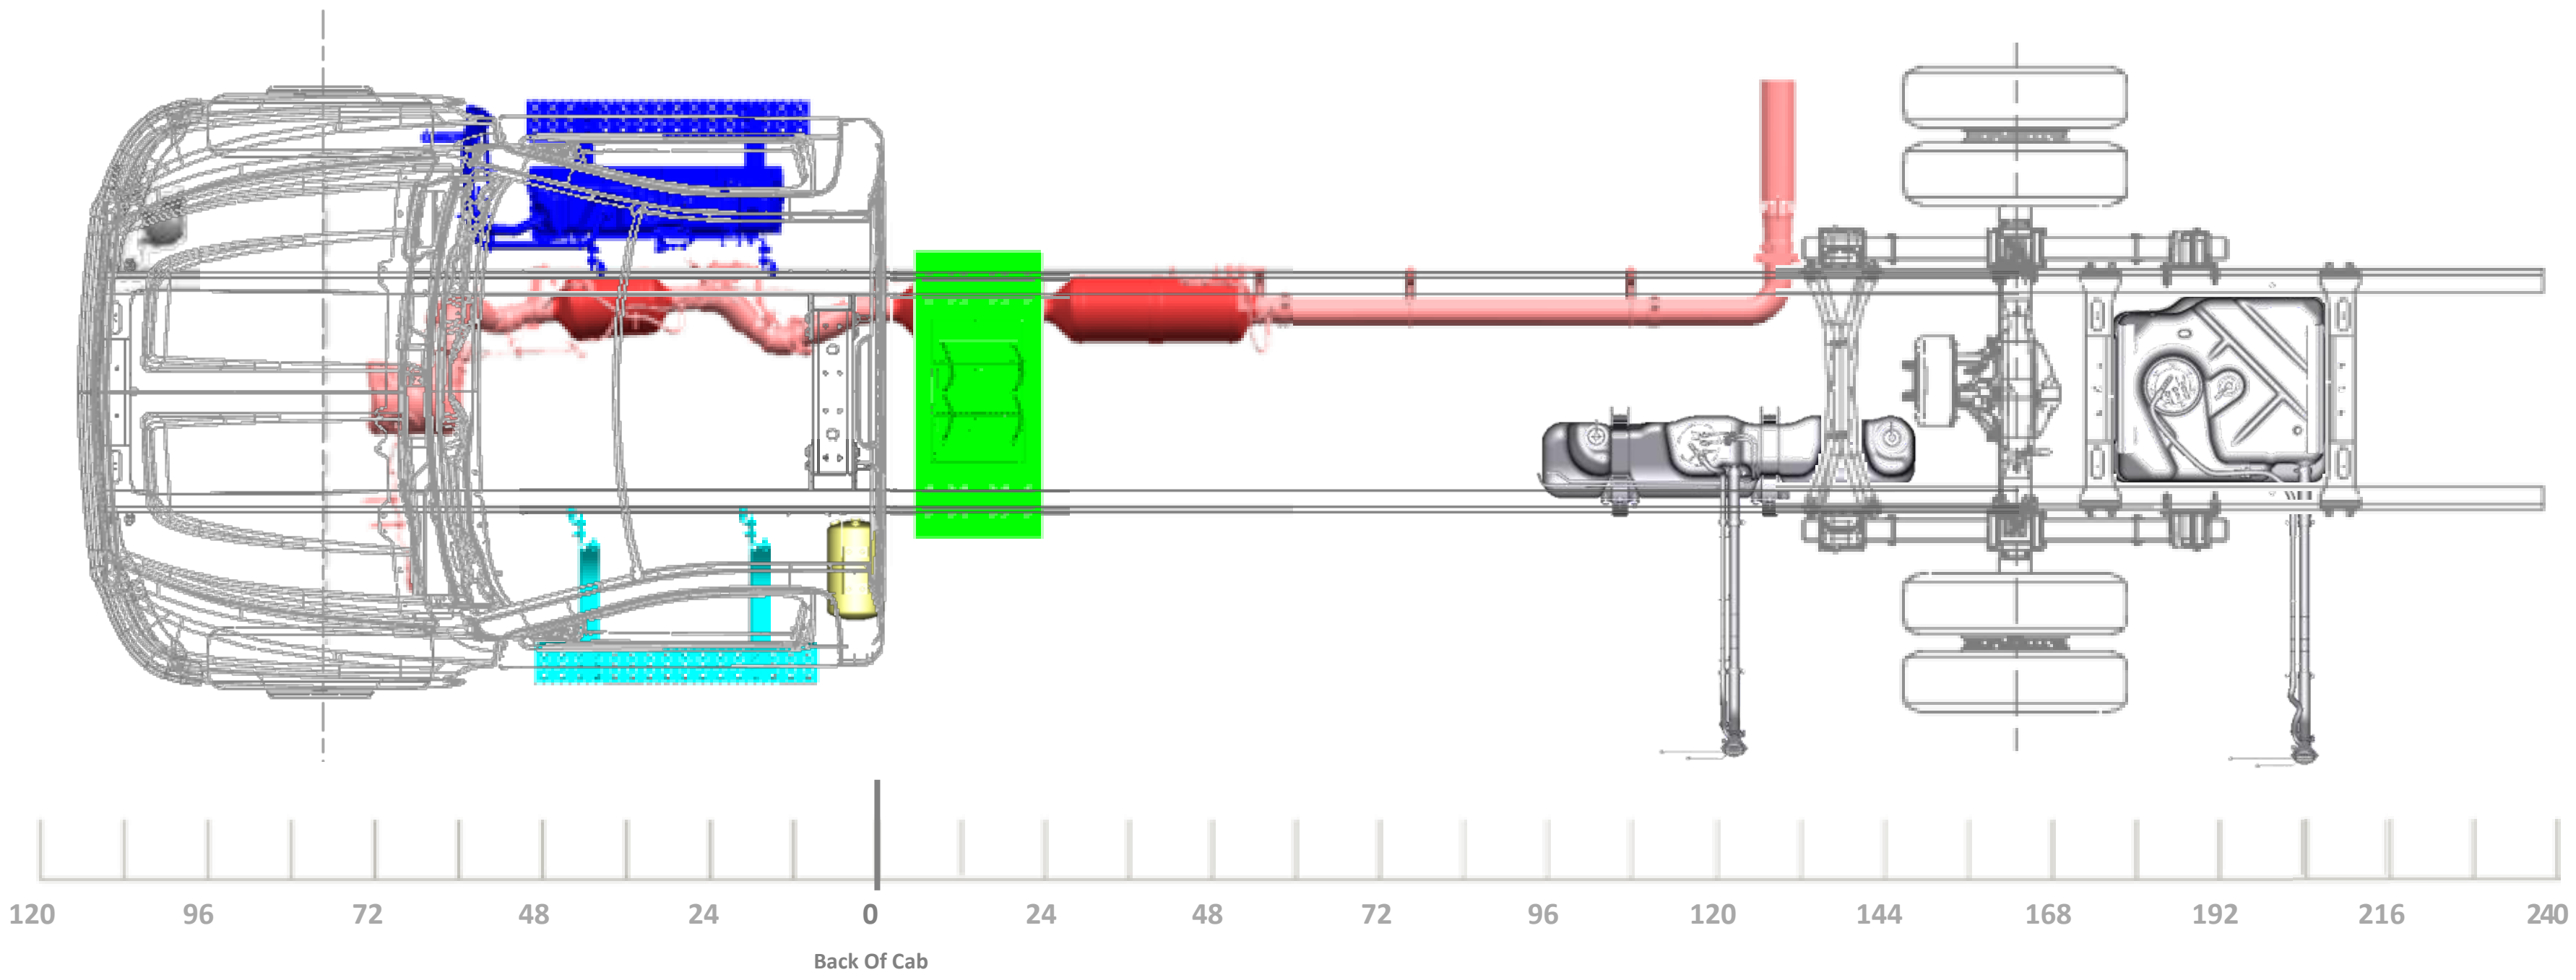
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
REAR AIR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

243” WB (162” CA)
83”AF

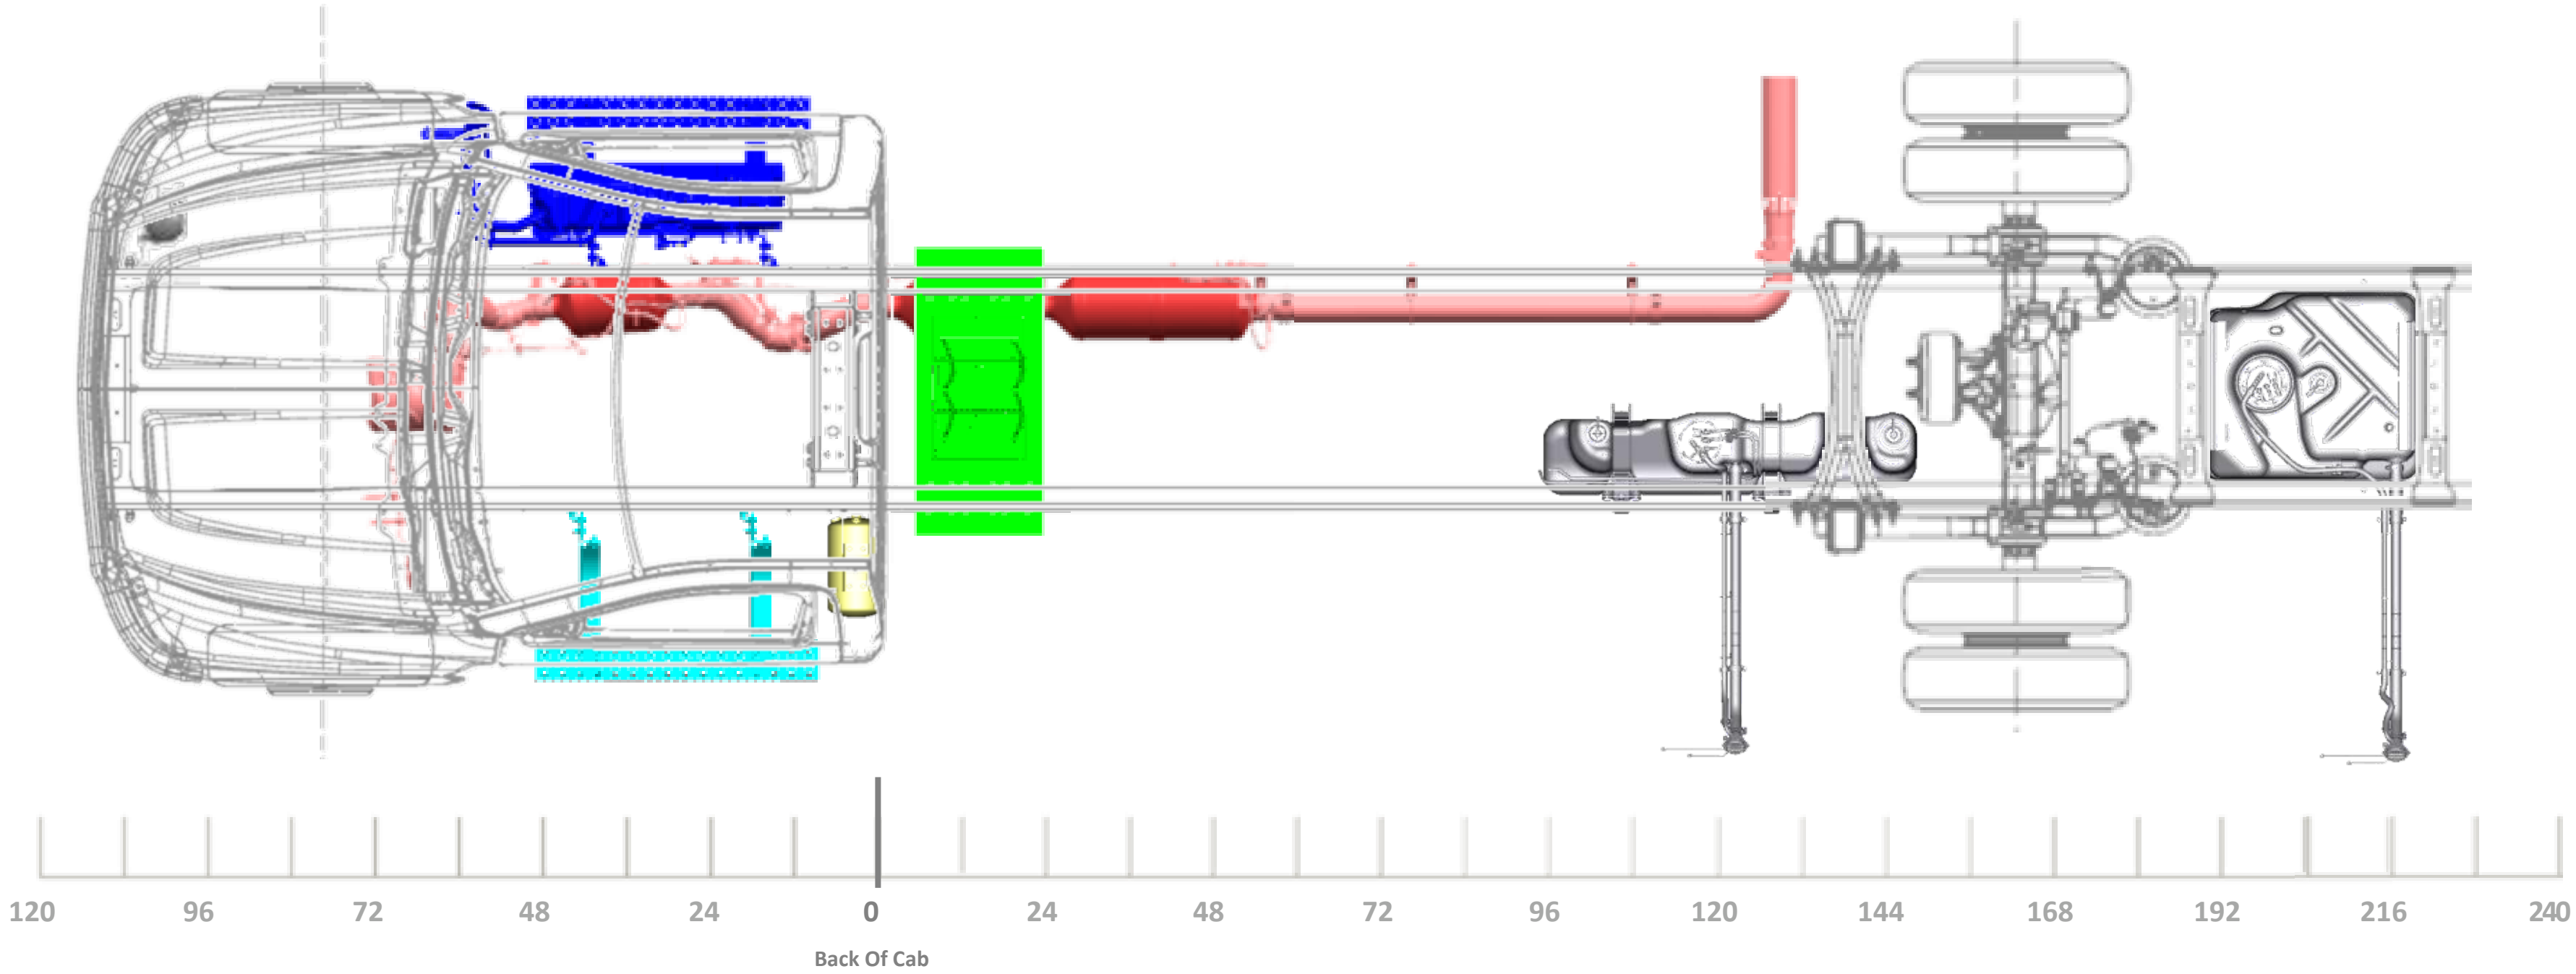

120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240
Back Of Cab

LAST REVISION: 9/25/2023

Public